



PRODUCT CATALOGUE

||||| 2026



CETA FORM
QUALITY

TABLE OF CONTENTS

1 TOOL CONTAINERS AND ASSORTMENTS

- 12 Roller Cabinets CNC Tables and Tool Cabinet
- 13 Fixed Tool Cabinets, Workbenches and Tool Panels
- 15 Accessories and Spare Parts
- 17 Tool Boxes and Caddy Trolley
- 18 Tool Bags
- 19 Tool Sets
- 22 Tool Sets with EVA
- 38 Tool Sets in Roller Cabinets



2 WRENCHES AND HEX KEYS

Fixed Jaw Wrenches

- 50 Combination Wrenches and Sets
- 51 Ratcheting Combination Wrenches and Sets
- 52 Double Open End Wrenches and Sets
- 54 Double Ring End Wrenches and Sets
- 55 Specialized Wrenches and Sets
- 55 Adjustable Wrenches
- 55 Slogging Wrenches
- 55 Double Ended Box Wrenches and Sets
- 56 Double Ended Offset Socket Wrenches and Sets
- 56 T Handle Nut Drivers and Sets
- 56 Double Swivel End Socket Wrenches



Hex Keys

- 56 Hex Keys and Sets
- 59 TORX L Keys and Sets
- 60 XZN L Keys and Sets
- 60 Combo Hexagon L Key Sets
- 61 T Handle Hexagon Keys and Sets
- 62 Foldup Hexagon Key Sets
- 62 TORX Flag Drivers and Sets



3 SOCKETS AND ACCESSORIES

- 63 1/4" Sockets, Accessories and Sets
- 70 3/8" Sockets, Accessories and Sets
- 74 1/2" Sockets, Accessories and Sets
- 83 3/4" Sockets, Accessories and Sets
- 84 1" Sockets, Accessories and Sets
- 85 Impact Sockets, Accessories and Sets



4 TORQUE WRENCHES

- 89 Fixed Head Torque Wrenches
- 90 Insert Torque Wrenches and Accessories
- 90 Torque Multipliers and Torque Angle Gauge



5 SCREWDRIVERS AND BITS

Screwdrivers and Sets

- 91 C-PLUS Screwdrivers and Sets
- 95 C-PLUS Impact Screwdrivers and Sets
- 95 C-PLUS Diamond Tip Screwdrivers and Sets
- 96 TOREX Screwdrivers and Sets
- 98 Reversible Screwdrivers and Z Screwdrivers



Bits and Sets

- 99 1/4" Impact Driver Bits
- 100 Color Coded 1/4" Torsion Bits and Sets
- 101 1/4" Bits
- 104 1/4" Machine Use Bits and Sockets
- 107 4 mm Micro Bits and Sets
- 108 5/16" Impact Bit Driver and Set
- 109 10 mm Bits
- 109 M5 Bits and Socket Adaptor Set
- 110 Bit Holders and Bit Drivers
- 111 Bit Ratchets
- 112 Bit Sets



6 PLIERS AND CUTTERS

- 114 Combination Pliers Diagonal Cutters and Sets
- 115 Diagonal Cutters (for Plastic)
- 116 Long Nose Pliers
- 117 Cable Stripping Tools
- 117 Multi-Purpose Pliers
- 118 Water Pump Pliers
- 119 Concreters' Nippers and Cutters
- 120 Grip Pliers
- 121 Cable Shears
- 122 Crimping Pliers
- 123 Special Pliers
- 124 Circlip Pliers and Sets



7 VDE 1000V TOOLS AND MULTIMETERS

- 125 1000V Screwdrivers and Sets
- 129 Voltage Testers
- 130 1000V Pliers, Diagonal Cutters and Sets
- 131 1000V Long Nose Pliers, Cable Shears and Cutters and Water Pump Pliers
- 132 1000V Wrenches, Adjustable Wrench and T-Handle Hexagon Keys
- 132 1000V Sockets and Accessories
- 134 1000V Torque Wrenches
- 134 1000V Mini Hacksaw and Control Cabinet Key
- 135 1000V Cable Knives and Stripping Knives
- 135 1000V Insulated Tool Sets
- 137 Multimeters, Digital Clampmeters and Infrared Thermometers



8 ELECTRONICS SCREWDRIVERS AND PLIERS

- 139 Electronics Screwdrivers and Sets
- 140 Electronics Pliers and Sets
- 144 Tweezers
- 145 Soldering Tools



9 PLUMBING TOOLS

- 147 Pipe Wrenches
- 148 PPRC Pipe Cutters
- 148 Steel Pipe Cutters and Telescopic Tubing Cutters



10 CUTTING TOOLS AND FILES

- 149 Aviation Tin Snips
- 150 Multi-Purpose Cutters
- 150 Pruning Shears
- 151 Bolt Cutters and Replacement Blades
- 151 Hacksaw Frames and Blades
- 151 Holesaws and Accessories
- 152 Reciprocating Saw Blades
- 153 Jigsaw Blades
- 153 Snap-Off Knives and Blades
- 154 Scrapers
- 155 Files and Sets
- 158 Rasps
- 159 Needle Files and Sets



11 HAMMERS AND CHISELS

- 160 Hammers and Rubber Mallets
- 161 Chisels, Punches and Sets
- 162 Hollow Punches and Sets
- 162 Wood Chisels and Sets
- 162 Pry Bars



12 SPECIALIST AUTOMOTIVE TOOLS

- 163 Test Kits
- 164 Cooling and Fuel System
- 166 Ignition System
- 167 Oil Service
- 169 Timing Apparatus
- 170 Valve, Piston and Injector Assembly
- 171 Exhaust System
- 171 Brake System
- 172 Running Gear
- 176 Bodywork and Trim Assembly
- 179 Electrical and Battery System



13 MEASURING TOOLS

- 182 Tape Measures and Long Tape Measures
- 183 Vernier Calipers and External Micrometers
- 183 Stainless Steel Rules, Feeler Gauges, Screw Pitch Gauge
- 184 Aluminium Spirit Levels and Accessories



14 GENERAL MAINTENANCE AND WORKSHOP TOOLS

LED Work Lights

- 185 LED Work Lights
- 187 LED UV Leak Detection and Color Proofing Work Lights
- 188 Folding LED Work Lights
- 189 Compact LED Floodlights
- 191 Wireless Charge LED Work Lights and Wireless Charging Dock
- 193 LED Headlamps
- 194 LED Flashlights



General Maintenance and Workshop Tools

- 197 Universal Pullers
- 197 Bench Vices
- 197 Hand Riveters, Kits and Replacement Nozzle Bolts and Nuts
- 199 Magnetic Pick-Up Tools and Telescoping Inspection Mirrors
- 200 Greasing Tools
- 200 Broken Bolt Removal Tools and Stud Removal Tools
- 201 1/2" Bolt Extractor Sockets, Picks/Hook Picks, Metal Scribes and Brushes



15 15 Merchandisers

- 202 T-Handle Hexagon Key Display
- 202 1/2" Drive 6-Point Socket Display
- 202 Screwdriver Displays
- 203 Bit Merchandiser
- 203 Pliers Displays
- 204 1000V Insulated Screwdriver and Pliers Displays
- 204 Electronics Screwdriver and Pliers Displays
- 204 File Display
- 205 Tape Measure Merchandisers
- 205 Aluminum Spirit Level Merchandiser



CONTENTS

About Ceta Form	2
New Products	6
Products	12
Merchandisers	202
Discontinued Products	205
Numerical Index	206
Ceta Form Warranty	217

51 Years of Excellence & Proud

51 YEARS

The Hand Tool Expert


Our story which started back in 1975 with a big vision in a small workshop is 51 years old. Today, Ceta Form has established its position as a leading manufacturer of hand tools with 2 production plants, investments in foreign countries and global presence. Our products are now being used in the most prestigious factories, power plants, aircraft hangars and automotive workshops all over the World.

The year 2025, our 50th year anniversary, has seen us improve our logistics capabilities in particular thanks to the our new warehouse infrastructure which is in place. We are now in a position to make more rapid and higher ratio deliveries from stock. In 2026, our investments will focus on product diversification and capacity enlargement.

We would like to thank our devoted team, forward-looking visionary distributors, collaborative suppliers and loyal users for their strong partnerships.

CETA FORM DNA

Ceta Form products promise the users a high level of quality, functional designs, and a large range; this promise is embodied by 100% sales and after-sales support. Our fundamental motivation is to provide the users with comfort in their daily work and let them enjoy a sense of success and satisfaction.

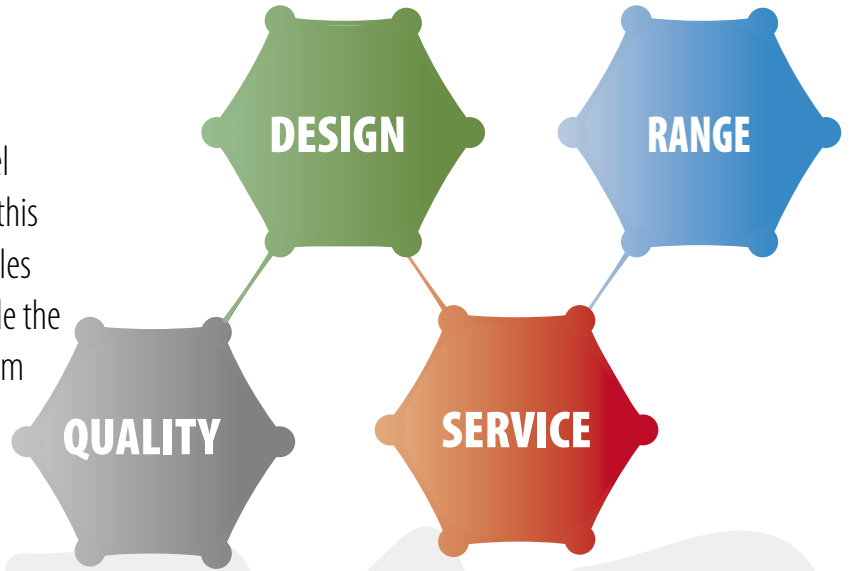

3 PRODUCTION AND LOGISTICS LOCATIONS

Ceta Form operates in 3 different locations which are in Istanbul and conveniently located for our international visitors.

FACTORY-1

PRODUCTION, LOGISTICS AND ADMINISTRATION



FACTORY-2

HOT FORGING






FZ WAREHOUSE

INTERNATIONAL LOGISTICS



CERTIFIED QUALITY


Ceta Form operates according to international management standards and internal product standards which often exceed DIN/ISO standards. Most of our insulated tools for working on live electricity are also VDE tested and certified.

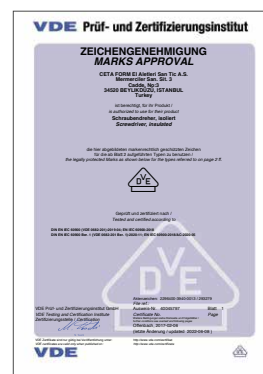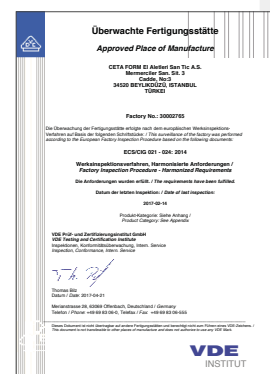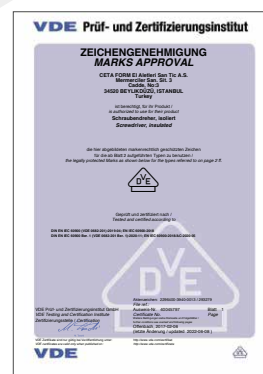

MANUFACTURING COMPETENCE

With 51 years of experience in the development and production of hand tools and tool trolleys, Ceta Form stands for high quality standards and manufacturing excellence. In 2 different production locations, we run a variety of production technologies under one roof. Being an integrated manufacturer, we are able to keep a close eye on all critical processes.

DEVELOPMENT AND DESIGN

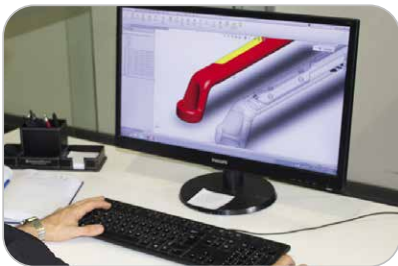

HOT FORGING



TOOL AND DIE MAKING



HEAT TREATMENT



MACHINING



ROBOTIC GRINDING



SHEET METAL FORMING



PLASTIC INJECTION MOLDING




BLOW MOLDING



PLASTISOL DIPPING



QUALITY

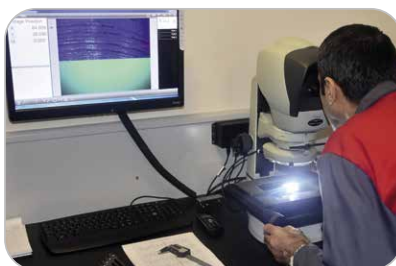

LOGISTICS



CNC Tool Cabinets

Professional Storage Solutions for Precision Efficiency

Our professional storage solutions, designed specifically for the high-value CNC tool holders in your workshop, maximize your operational efficiency. They offer an ergonomic layout that accelerates your workflow while protecting your precision tools from external factors.

A01-05CNC
CNC Tool Cart - 5 Drawers



HxWxD / mm
975x710x450

12 slots compatible with CNC tool holders

BT/SK/ISO - 40



BT/SK/ISO - 50



Our patented holder system can accommodate both types of CNC tool holders.

Page 13

A12-20CNC1
CNC Tool Cabinet (with Plexiglass Doors)



HxWxD / mm
2000x1000x615


90 slots compatible with CNC tool holders

CNC Tool Racks & Stands

Keep Your Precision Within Reach

All the tools you need at your workstation are now right at your fingertips. Our CNC Tool Stands are engineered to provide maximum tool density in limited spaces and minimize changeover times.

A01-SCM
HxWxD / mm
328x620x440

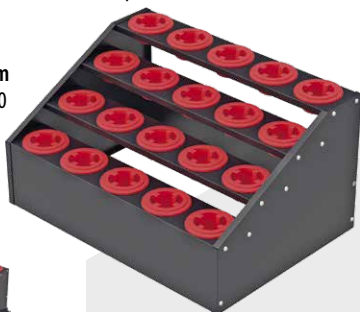

20 slots compatible with CNC tool holders

Compatible with A01 and A02 series roller cabinets

A01-SCL
HxWxD / mm
328x796x440



24 slots compatible with CNC tool holders

Compatible with A01-J series Jumbo roller cabinets

A03-CNC1
HxWxD / mm
1170x670x630



55 slots compatible with CNC tool holders

Page 13

Tool Cabinets

Eliminate Chaos, Enhance Productivity.

Our professional tool cabinets are designed to eliminate clutter in workshop and factory environments. Featuring high load capacities and modular shelving systems, they allow you to organize even your heaviest equipment with total confidence.

Total Security: Protect your valuable equipment at all times with our robust, lockable door mechanisms.

Heavy-Duty Chassis: Industrial-grade steel construction designed for long-lasting durability against impacts and harsh working conditions.



A12-15D0
HxWxD / mm
1500x1000x490 **3 Racks**



A12-20D6
HxWxD / mm
2000x1000x490 **6 Drawers + 3 Racks**



A10-4D10
HxWxD / mm
1126x806x490 **10 Drawers**



A10-6D10
HxWxD / mm
1186x1006x690 **10 Drawers Extra Deep**

Page 14

New Automotive Tool Kits

Customized Solutions for Specialized Maintenance

344 Piece FORD Mechanical Automotive Tool Set: Optimized for FORD service standards.




GT MAX 8 Drawers



GT PLUS 8 Drawers

Page 45



328 Piece PSA Mechanical Automotive Tool Set: Comprehensive kit for Peugeot, Citroën, and Opel maintenance



GT MAX 8 Drawers



GT PLUS 8 Drawers

Page 45

358 Piece Heavy Vehicle Mechanical Tool Set: Engineered for the toughest truck and machinery repairs.



GT MAX 8 Drawers



GT PLUS 8 Drawers

Page 46



291 Piece Motorcycle General Maintenance Tool Set: Everything needed for professional motorcycle workshops.



GT MAX 8 Drawers



GT PLUS 8 Drawers

Page 48

Digital Aluminum Spirit Level

Unmatched Precision for Challenging Tasks

Designed to complete your most demanding slope and level measurements with flawless accuracy, our Digital Aluminum Spirit Level blends advanced technology with rugged durability. The large, backlit LCD screen ensures perfect readability even in dark or poorly lit work areas.

P20D-060



Page 184

Soft-Face Hammers

Specifically developed for assembly tasks where powerful strikes are required without damaging the surface. Unlike traditional hammers, it leaves no marks or dents on the workpiece.

Heads made of polyamide ensure maximum durability and are easily replaceable.

L12-2 Series

Ø 30,40, 50 mm



Secure Push Fit

Page 160

Dual-Function Trimming Knife

19 mm

Page 153



J47DUO


The Ultimate Harmony of Ergonomics and Functionality

Offering the perfect balance of comfort and utility, this professional knife provides two distinct solutions in a single body: high-performance standard cutting and heavy-duty scraping.

Dual Mode: Seamlessly switch between cutting and scraping functions.

19 mm Trapezoidal Blade: Compatible with standard heavy-duty blades for versatile use.

Ergonomic Grip: Designed for extended use without hand fatigue.



LED Work Lights

Advanced Illumination for the Modern Workshop

Engineered to keep pace with the intense workflow of modern workshops and garages, our aluminum-bodied LED work lights feature advanced circuit board technology. These units maximize your productivity with high-intensity light output, while the magnetic base and lightweight design allow for hands-free operation in any environment.

Page 190

1200
lumen



R10-ALCOM1



Compact Rechargeable LED Work Light (Alu Line)

Main light: 10W COB LED 1200-600-80 lumens
Top light: 2W SMD LED 100 lumens
CRI: 80 CRI+ **CCT:** 6000-7000K
Battery: 3.7V 2000 mAh Li-ion
Runtime: 1,5 h - 5,5 h - 10 h / Top light 12 h
Charging time: 3 s, battery level indicator
Protection class: IP65 / IK07
HxWxD: 116 x 45 x 26 mm / 147 gr

300
lumen



R10-ALPEN1



Rechargeable LED Pen Light (Alu Line)

Main light: 3W COB LED 300 lumens
Top light: 2W SMD LED 200 lumens
Battery: 3.7V 700 mAh Li-ion
Runtime: Main light 2 h / Top light 3 h
Charging time: 2 h
Protection class: IP20 / IK07
HxWxD: 170 x 21 x 20 mm / 58 gr


Bit Ratchet Handles

The Essential Choice for High-Torque Precision

Built for professional use, these bit ratchet handles combine high torque capacity with a precision mechanism.

F26/BR1

Standard Bit Ratchet Handle
 Compact design for high performance in tight spots.




Page 111

Flex-Head Bit Ratchet Handle

8-Position Adjustable Head: The flexible head design allows for full performance even at angles where standard wrenches cannot reach.

F26/BR1F

Page 111



8 Position

NEW PRODUCTS

9 Piece Ball End Hexagon L-Key Set (Long Arm - Magnet Holding)

Magnetic Screw Retention: The integrated magnet at the ball point tip prevents screws from falling, providing high comfort in vertical and overhead tasks.

Ball Point Geometry: Enables fast and axial operation even at non-perpendicular angles in tight and obstructed spaces.

LT/900M

Page 58



Page 61



LT30/900CP

30 Piece Combo Ball End Hexagon L Key Set (Long Arm) - Metric / SAE

Combining both Metric and SAE (Inch) measurement units in a single, compact case, this comprehensive set offers a professional solution for all your fastening needs. The manganese phosphate coating provides superior corrosion resistance while ensuring maximum durability during high-torque applications.

Crimping Tools

Smart Crimping: Automatic cross-section adjustment and a ratchet locking mechanism completely eliminate the risk of incorrect or incomplete crimping. 360-degree equal pressure to the ferrule.

E69-ESSQ1



for End Sleeves - Square Form

Professional Square (Quadrilateral) Wire Ferrule Crimping Tool

Square (4-sided) jaw structure ensures the ferrule makes contact with the maximum surface area inside the terminal.

Ideal Usage: Recommended for spring-loaded terminals, rectangular entries, and all professional panel/installation connections requiring flat contact surfaces.

E69-ESHX1



for End Sleeves-Hexagonal Form

Professional Hexagonal Wire Ferrule Crimping Tool

Hexagonal (6-sided) jaw structure applies 360-degree equal pressure to the ferrule.

Ideal Usage: Provides the best results for round terminal entries and standard connections in confined spaces.

Page 123

C-PLUS Voltage Testers - 250V

Professional Safety and Superior Durability

Engineered in full compliance with low-voltage standards, the new CPLUS voltage tester series ensures maximum safety for all electrical tasks. The VDE-approved models in the series have been strictly tested and certified by the German VDE institute. In addition to standard slotted tips, the range now includes a Phillips (PH1) tip version for enhanced versatility.

VDE Certified Safety

Approved electrical safety according to rigorous German VDE standards.

High-Strength Engineering

The 4.0 mm slotted model is specially designed for heavy-duty applications requiring increased torque and durability.

Phillips (PH1) Tip Option

An innovative solution combining voltage testing functionality with the practicality of a Phillips screwdriver.

Ergonomic Grip

The signature C-PLUS handle design ensures comfort and a secure grip during extended professional use.

Page 129



Professional 1000V VDE Interchangeable Slimline Series

Maximum Safety in Tight Spaces, Unrivalled Performance!

The new generation C-PLUS 1000V Interchangeable Screwdriver System combines occupational safety with ergonomic comfort for electrical professionals.

Slim Profile Design

Work seamlessly in confined spaces with extra-thin blade geometry.




Versatile Modularity

Master every screw type (Slotted, Phillips, Pozidriv, Torx, and Terminal) with a single handle.



Control Cabinet Solutions

Be prepared for any field operation with specialized key bits for square, triangular, and double-bit panel locks.

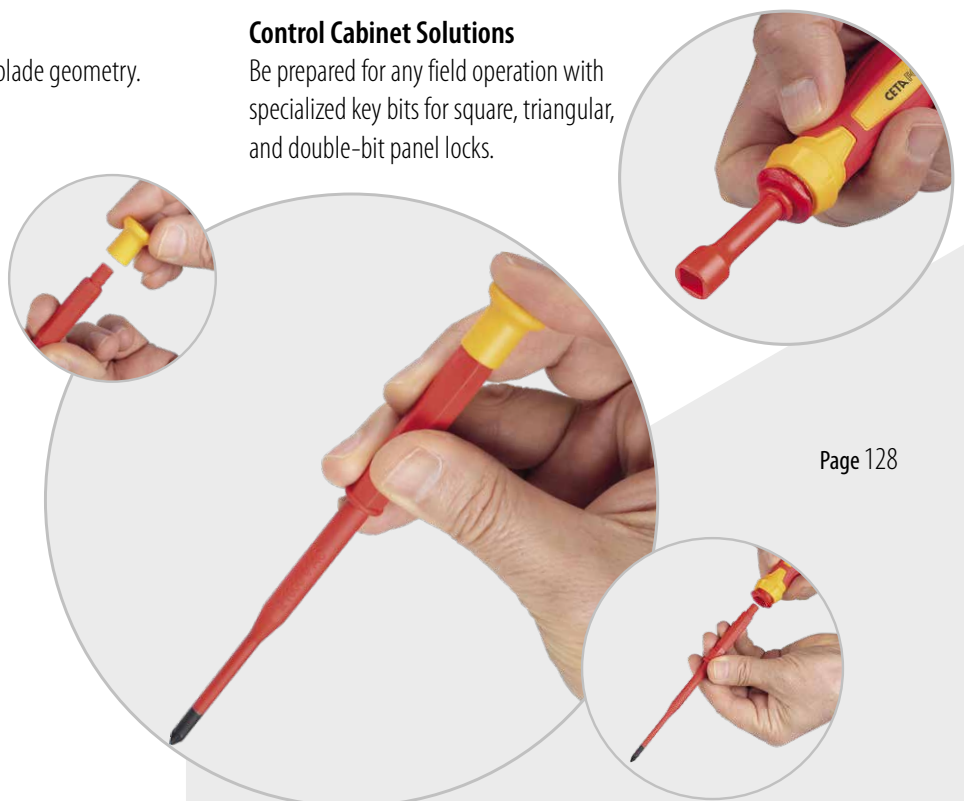

Page 128

1 Tool Containers and Assortments

1 Tool Containers and Assortments

12 | 48



A01M Series

GT-MAX Roller Cabinets (Empty)



CODE NO	Drawers	HxWxD / mm	kg
A01M-06	6	1018x746x458	67
A01M-07	7	1018x746x458	67
A01M-08	8	1018x746x458	70
A01M-06L*	6	1018x746x458	67
A01M-07L*	7	1018x746x458	67
A01M-08L*	8	1018x746x458	70

* Single opening drawer/Locked

A01M-J Series

GT-MAX Jumbo Roller Cabinets (Empty)



Wide Body

CODE NO	Drawers	HxWxD / mm	kg
A01M-07J	7	1018x922x458	77
A01M-08J	8	1018x922x458	80
A01M-07JL*	7	1018x922x458	77
A01M-08JL*	8	1018x922x458	80

* Single opening drawer/Locked

A01 Series

GT-PLUS Roller Cabinets (Empty)



CODE NO	Drawers	HxWxD / mm	kg
A01-06	6	975x710x450	60
A01-07	7	975x710x450	62
A01-08	8	975x710x450	72

A01-J Series

GT-PLUS Jumbo Roller Cabinets (Empty)



Wide Body

CODE NO	Drawers	HxWxD / mm	kg
A01-07J	7	975x890x450	72
A01-08J	8	975x890x450	74

A01-W Series

GT-PLUS XL Roller Cabinets (Empty) - 6 Drawers



A01-06W: Metal worktop with PVC mat
A01-06WW: Wooden worktop

CODE NO	Drawers	HxWxD / mm	kg
A01-06W	6	997x1085x450	74
A01-06WW	6	997x1085x450	82

A01-11 Series

GT-PLUS Jumbo XL Roller Cabinets (Empty) - 11 Drawers



A01-11: Metal worktop with PVC mat
A01-11W: Wooden worktop

CODE NO	Drawers	HxWxD / mm	kg
A01-11	11	1020x1085x500	90
A01-11W	11	1020x1085x500	97

A02 Series

GT Roller Cabinets (Empty)



CODE NO	Drawers	HxWxD / mm	kg
A02-04*	3	825x630x450	38
A02-05	5	825x630x450	47
A02-06	6	825x630x450	49

* A02-04 with an integrated locker for bulky parts

A03-SD

Basic Tool Cart (Standard Duty)



CODE NO	HxWxD / mm	kg
A03-SD	930 x 760 x 460	29

A03-ID

Basic Tool Cart (Heavy Duty)



CODE NO	HxWxD / mm	kg
A03-ID	950 x 910 x 560	35

A01-05CNC

CNC Tool Cart - 5 Drawers

new



BT/SK/ISO - 40, BT/SK/ISO - 50
12 slots compatible with CNC tool holders

CODE NO	Drawers	HxWxD / mm	kg
A01-05CNC	5	975x710x450	53

A01-SCM

CNC Table - Standard

new



Compatible with A01 and A02 Series Roller Cabinets

BT/SK/ISO - 40, BT/SK/ISO - 50
20 slots compatible with CNC tool holders

CODE NO	Holder	HxWxD / mm	kg
A01-SCM	20	328x620x440	7,5

A01-SCL

CNC Table - Jumbo

new



Compatible with A01-J Series Jumbo Roller Cabinets

BT/SK/ISO - 40, BT/SK/ISO - 50
24 slots compatible with CNC tool holders

CODE NO	Holder	HxWxD / mm	kg
A01-SCL	24	328x796x440	9

A03-CNC1

CNC Tool Cart (Open Type)

new



BT/SK/ISO - 40, BT/SK/ISO - 50
55 slots compatible with CNC tool holders

CODE NO	Shelf	HxWxD / mm	kg
A03-CNC1	6	1170x670x630	37

A12-20CNC1

CNC Tool Cabinet (Plexiglass Covered)

new



BT/SK/ISO - 40, BT/SK/ISO - 50
90 slots compatible with CNC tool holders

CODE NO	Shelf	HxWxD / mm	kg
A12-20CNC1	5	2000x1000x615	110

1 Tool Containers and Assortments

A10-4D10
Stationary Tool Cabinet - 10 Drawers

new



CODE NO	Drawers	HxWxD / mm	kg
A10-4D10	10	1126x806x490	76

A10-6D10
Stationary Jumbo Tool Cabinet - 10 Drawers

new



CODE NO	Drawers	HxWxD / mm	kg
A10-6D10	10	1186x1006x690	90

A12-15D0
Stationary Tool Cabinet - 4 Compartments

new



Height adjustable shelf system

CODE NO	Shelves	HxWxD / mm	kg
A12-15D0	4	1500x1000x490	64

A12-20D6
Stationary Tool Cabinet - 6 Drawers / 4 Compartments

new



Height adjustable shelf system

CODE NO	Shelves	Drawers	HxWxD / mm	kg
A12-20D6	4	6	2000x1000x490	114

A17L Series
Workbenches



H x W x D (mm)
950 x 1700 x 700

CODE NO	WORKTOP	kg
A17L-NW	Wooden	45
A17L-NW	Stainless Steel	45
A17L-NW	Galvanized	45

A17D Series
Heavy Duty Workbenches - 3 Drawers



H x W x D (mm)
950 x 1700 x 700

CODE NO	WORKTOP	kg
A17D-W	Wooden	69
A17D-S	Stainless Steel	84
A17D-G	Galvanized	89

A17D-P Series
Heavy Duty Workbenches (with Tool Panel) - 3 Drawers



H x W x D (mm)
950 x 1700 x 730

CODE NO	WORKTOP	kg
A17D-WP	Wooden	88
A17D-SP	Stainless Steel	103
A17D-GP	Galvanized	108

Delivery without hooks, please order separately (page 27)

W WOODEN



S STAINLESS STEEL



StainlessSteel

G GALVANIZED



A20-200SH

Tool Panel With Shutter (Empty) - L



CODE NO	WxHxD / mm	kg
A20-200SH	2000 x 900 x 215	51

A20-110SH

Tool Panel With Shutter (Empty) - M



CODE NO	WxHxD / mm	kg
A20-110SH	1140 x 900 x 215	30

A20 Series

Perforated Tool Panels



CODE NO	WxH / mm	kg
A20-100	1000 x 700	9
A20-170	1700 x 900	19

A20-170 also compatible to A17L series workbenches

A01-PS

Perforated Tool Panel for GT-PLUS Series

- Compatible with standard width GT-PLUS cabinets (A01-06, 07, 08)
- Delivery without any accessories or tools



CODE NO	HxW / mm	kg
A01-PS	600 x 620	5.0

A01-PM

Perforated Tool Panel for GT-PLUS Series - Jumbo

- Compatible with GT-PLUS Jumbo cabinets (A01-07J, 08J)
- Delivery without any accessories or tools



CODE NO	HxW / mm	kg
A01-PM	600 x 796	6.5

A01-PL

Perforated Tool Panel for GT-PLUS Series - XL

- Compatible with XL width GT-PLUS cabinets (A01-06W, 06WW, A01-11, 11W)
- Delivery without hooks



CODE NO	HxW / mm	kg
A01-PL	600 x 1128	7.7

A17H Series

Hooks for Perforated Panels



CODE NO	L / mm	kg
A17H-S25	25	12 •
A17H-S50	50	12 •
A17H-D50	50	12 •

A01M-LD

Lateral Door for GT-MAX Series (Lockable)

- For right side panel on GT-MAX and GT-MAX Jumbo Series (A01M-06, 07, 08 and A01M-07J, 08J)
- 95 mm clear depth and approximately 750 mm usable height



CODE NO	kg
A01M-LD	1

A01M-CH

Spray Can Holder for GT-MAX Series

- For right side panel on GT-MAX and GT-MAX Jumbo Series (A01M-06, 07, 08 and A01M-07J, 08J)



CODE NO	kg
A01M-CH	1

A01M-PR

Paper Reel Holder for GT-MAX Series

- For right side panel on GT-MAX and GT-MAX Jumbo Series (A01M-06, 07, 08 and A01M-07J, 08J)
- Delivery without paper reel



CODE NO	kg
A01M-PR	1

1 Tool Containers and Assortments

A01M-DH

Document Holder for GT-MAX Series


- For right side panel on GT-MAX and GT-MAX Jumbo Series (A01M-06,07,08 and A01M-07J, 08J)
- For A4 size documents




CODE NO		
A01M-DH		1

A01-PM Series

PVC Mat for Cabinet Workshops

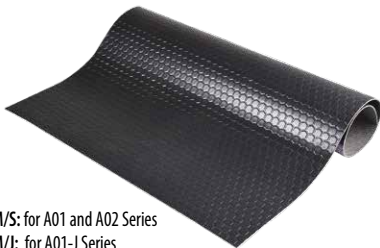


A01-PM/S: for A01 and A02 Series
 A01-PM/J: for A01-J Series
 A01-PM/W: for A01-W Series
 A01-PM/XL: A01-11 Series

CODE NO	HxW / mm	
A01-PM/S	445 x 625	1
A01-PM/J	445 x 800	1
A01-PM/W	445 x 1080	1
A01-PM/XL	495 x 1080	1

A-SL

Spare Lock




CODE NO	FOR	
A-SL	GT-MAX, GT-PLUS, GT Series	1

A-SH

Spare Handle (for Roller Cabinets)




CODE NO	FOR	
A-SH	GT-MAX, GT-PLUS, GT Series	1

A-STR-4045

Telescopic Slide (Pair)




CODE NO	LxW / mm	
A-STR-4045	400 x 45	1

A-SW100 Series

Spare Wheels - Ø 100 (for GT Series and A03-SD)




CODE NO	TYPE	Ø / mm	
A-SW100	Wheel only	100	1
A-SW100F	Fixed	100	1
A-SW100S	Swiveling	100	1
A-SW100SB	Swiveling with Brake	100	1

A-SWS-01M

Spare Worktops (for GT-MAX Series)




CODE NO	HxWxD / mm	
A-SWS-01M	35 x 745 x 455	1

A-SWJ-01M

Spare Worktops (for GT-MAX Jumbo Series)




CODE NO	HxWxD / mm	
A-SWJ-01M	35 x 920 x 455	1

A-SW125 Series

Spare Wheels (for GT-MAX, GT-PLUS Series and A03-ID)



CODE NO	TYPE	Ø / mm	
A-SW125	Wheel only	125	1
A-SW125F	Fixed	125	1
A-SW125S	Swiveling	125	1
A-SW125SB	Swiveling with Brake	125	1

A06-04
Tool Chest (Empty) - 4 Drawers



CODE NO	Drawers	HxWxD / mm	kg
A06-04	4	492 x 625 x 442	35

A06-04JS
Jumbo Tool Chest (Empty) - 4 Drawers



CODE NO	Drawers	HxWxD / mm	kg
A06-04JS	4	492 x 800 x 442	42

A06-08JX
Jumbo Tool Chest (Empty) - 8 Drawers



CODE NO	Drawers	HxWxD / mm	kg
A06-08JX	8	492 x 1075 x 442	64

A06-CT
Caddy Trolley (for Tool Chests)



CODE NO	HxWxD / mm	kg
A06-CT	165 x 810 x 450	12

A07-02
Tool Box (Empty) - 2 Drawers



CODE NO	Drawers	HxWxD / mm	kg
A07-02	2	250 x 565 x 255	11

A07-03
Tool Box (Empty) - 3 Drawers



CODE NO	Drawers	HxWxD / mm	kg
A07-03	3	300 x 565 x 255	11.5

A07-0301
Aerospace Tool Box (Empty) - 3 Drawers



CODE NO	Drawers	HxWxD / mm	kg
A07-0301	3	310 x 560 x 230	14

A25-5 Series
Cantilever Tool Boxes



CODE NO	TRAYS	WxHxD / mm	kg
A25-5	5	420 x 195 x 200	4.3
A25-5L	5	510 x 195 x 200	5.2

A27-PL Series
Plastic Tool Boxes



CODE NO	WxHxD / mm	kg
A27-16PL	434 x 239 x 194	8 •
A27-19PL	494 x 263 x 250	8 •
A27-22PL	582 x 310 x 293	6 •

1 Tool Containers and Assortments

A27J-28 28" Portable Tool Chest



CODE NO	WxHxD / mm	kg
A27J-28	595 x 420 x 380	5.0

A32 Series Raptor Tool Cases (Empty)



CODE NO	WxHxD / mm	kg
A32	530 x 400 x 180	5.0
A32-XL	530 x 400 x 228	5.9

A32H Series Raptor Tool Cases - Mobility (Empty)



CODE NO	WxHxD / mm	kg
A32H	530 x 400 x 230	6.3
A32H-XL	530 x 400 x 280	7.2

A32/T Add On Telescopic Wheel Kit for A32



CODE NO	WxHxD / mm	kg
A32/T	320 x 490 / 920 x 70	1.3

A26-ET01 Technician's Tool Bag - Plus



CODE NO	WxHxD / mm	kg
A26-ET01	440 x 340 x 200	2.0

A26-IT01 Technician's Tool Bag



CODE NO	WxHxD / mm	kg
A26-IT01	460 x 340 x 150	1.9

A26-BP01 Technician's Backpack



CODE NO	WxHxD / mm	kg
A26-BP01	355 x 460 x 225	1.2

A26-TB Series Tool Bags



A26-TB12



A26-TB19

CODE NO	WxHxD / mm	kg
A26-TB12	300 x 190 x 150	0.46
A26-TB19	500 x 280 x 260	1.60

A26-PB01 Belt Pouch



CODE NO	WxH / mm	kg
A26-PB01	170x330	0.15

A50M-98A07

98 Piece Mechanic's Tool Set



CODE NO

A50M-98A07

WxHxD (mm)

300 x 565 x 255

CONTENTS

B01	12 PC: 6, 7, 8, 9, 10, 11, 12, 13, 14, 17, 19, 22 mm Combination Wrenches
LT/900	9 PC: 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm Ball End Hexagon L Key Set (Long Arm)
LT/700L	8 PC: T9, T10, T15, T20, T25, T27, T30, T40 TORX L Key Set (Long Arm)
C02-H	12 PC: 4, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 mm 1/4" Drive 6-Point Sockets
C22-H	18 PC: 8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32 mm 1/2" Drive 6-Point Sockets
C01-12	1/4" Drive Quick Release Reversible Ratchet
C21-12	1/2" Drive Quick Release Reversible Ratchet
C01-20	1/4" Drive Spinner Handle (120 mm)
C01-40	1/4" Drive Sliding T-Handle (115 mm)
C21-40	1/2" Drive Sliding T-Handle (250 mm)
C01-70	2 PC: 50, 150 mm 1/4" Drive Extension Bar
C21-70	2 PC: 125, 250 mm 1/2" Drive Extension Bar
C01-80	1/4" Drive Universal Joint
C21-80	1/2" Drive Universal Joint
F10	4 PC: 3.0x75, 4.0x100, 5.5x125, 6.5x150 mm C-PLUS Slotted Screwdrivers
F10/TP	5.5 x 25 mm C-PLUS Slotted Stubby Screwdriver
F14	2 PC: PH1x80, PH2x100 mm C-PLUS Phillips Screwdrivers
F14/TP	PH2 x 25 mm C-PLUS Phillips Stubby Screwdriver
6105CP	Voltage Tester (for 110 to 250V-VDE Approved)
E01-41	180 mm Combination Pliers
E06-41	160 mm Diagonal Cutter
E15-41	160 mm Long Nose Pliers
E30-54	250 mm Water Pump Pliers (Box Joint)
E50-240-2	240 mm Grip Pliers (Curved Jaws)
J45CPM	C-Pro Utility Knife (Metal Body) - 18 mm
L01-500	Machinist's Hammer - 500 gr
L12-40	Soft Face Hammer - Ø 40 mm
L25-150-2	Flat Chisel - 18 x 150 mm
L29-4	Centre Punch - Ø4 x 120 mm
L31	4 PC: Ø(3, 4, 5, 6) x 150 mm Parallel Pin Punch
P05-0519	Compact Tape Measure (5 M x 19 mm)
P15	2 PC: Stainless Steel Rule - 15, 30 cm
P54-20S	Feeler Gauge (Metric) - 20 Leaf (0,05 - 1,0 mm)
R11-PEN	Lu-MAX Stylus LED Flashlight - 100 Lumen

A50AS-159A07

159 Piece Aerospace Tool Set



CODE NO

A50AS-159A07

WxHxD (mm)

310 x 560 x 230

CONTENTS

B01AS	7/32 inch Combination Wrench (12 Point - Short) - SAE
B01A	15 PC: 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1 inch Combination Wrenches - SAE
B095A	9 PC: 7/32, 15/64, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2 inch Short Angle Open End Wrenches - SAE
B07A	3 PC: 1/4x5/16, 3/8x7/16, 1/2x9/16 inch Ratchet Ring Wrenches (Straight) - SAE
B21-B	2 PC: 150, 250 mm Adjustable Wrenches (Phosphated)
K99-F2M	9 PC: 0.05, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16 inch Foldup Hexagon Key Set (Metal Body)-SAE
C02A-B	10 PC: 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2, 9/16 inch 1/4" Drive 12-Point Sockets - SAE
C04A-B	10 PC: 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2, 9/16 inch 1/4" Drive 12-Point Deep Sockets - SAE
C02UA	9 PC: 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2, 9/16 inch 1/4" Drive 12-Point Joint Sockets - SAE
C08AS-H	11 PC: 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4, 5/16 inch 1/4" Drive Hexagon Socket Bits - SAE
C01-T90	1/4" Drive T90 Sealed Reversible Ratchet
C01-70	4 PC: 50, 75, 100, 150 mm 1/4" Drive Extension Bar
C01-75F	1/4" Drive Flexible Extension Bar- 150 mm
C01-92	1/4" Socket Adaptor- (F: 1/4" - M: 3/8")
C12A-B	13 PC: 1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1 inch 3/8" Drive 12-Point Sockets - SAE
C14A-B	13 PC: 1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1 inch 3/8" Drive 12-Point Deep Sockets - SAE
C11-T90	3/8" Drive T90 Sealed Reversible Ratchet
C11-36MR	3/8" Drive Swivel Handle - 250 mm
C11-70	3 PC: 75, 150, 250 mm 3/8" Drive Extension Bar
C11-50MR	3/8" Drive Speeder Brace - Metal Palm Handle (420 mm)
C11-80	3/8" Drive Universal Joint
C11-91	3/8" Socket Adaptor- (F: 3/8" - M: 1/4")
BT/8003	3/8" Drive Bit Holder Socket (for 1/4" Bits)
F10	2 PC: 5.5x125, 8.0x150 mm C-PLUS Slotted Screwdrivers
F14	PH2x100 mm C-PLUS Phillips Screwdrivers
3100/TF2	PH2/6.0 x 175 mm Reversible Screwdriver
Z/12	PH1/PH2 x 100 mm Offset Phillips Screwdriver
Z/55	5.5/5.5 x 100 mm Offset Slotted Screwdriver
F26/RDS	12-in-1: Stubby Ratchet Bit Driver Set
F26/BR2	Reversible Bit Ratchet#2 - 1/4" x 90 mm
E01-44	180 mm Combination Pliers
E06-44	160 mm Diagonal Cutter
E15-44	160 mm Long Nose Pliers
E50-2	2 PC: 140, 240 mm Grip Pliers (Curved Jaws)
E30-54	250 mm Water Pump Pliers (Box Joint)
E80-230R	Wire Twisting Pliers (Reversible) - 230 mm
L02-12	Ball Pein Hammer - 12 Oz/340 gr
L12-40	Soft Face Hammer - Ø 40 mm
L35A-51	5 PC: Chisel and Punch Set (ANSI Spec.) - SAE
R.P6	Lumax PRO 2AA Focus Flashlight
R15-1000	Magnetic Pick-Up Tool (Cap.: 1000 gr)
R16-700	Magnetic Pick-Up and Claw Tool (Cap.: 500 gr)
R20R	Telescoping Inspection Mirror (Round) - Ø 50 - 25/90cm
R36-1	Straight Pick

1 Tool Containers and Assortments

A50M-43

43 Piece Mechanic's Tool Set



43 Piece Tool Set

Sets in Tool Boxes

Contents Only



(A50M-43+A25-5L)



(A50M-43+A27-19PL)



(A50M-43+A32)



(A50M-43+A32H)



CODE NO **A50M-43**

A50M-43A25

A50M-43A27

A50M-43A32


A50M-43A32H

A50M-80PH4

80 Piece Universal Tool Set




CODE NO	PIECES	WxHxD / mm
A50M-80PH4	80	440x320x100



700x370 mm

B99-E37

37 Piece Combination and Double Ring End Wrench Set

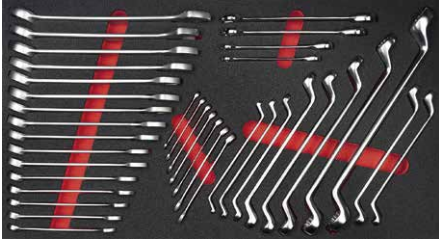
new

CODE NO	PIECES
B99-E37	37

- B01** 23 PC: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28 mm Combination Wrenches
- B14** 10 PC: 6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 18x19, 20x22, 24x27, 30x32 mm Double Ring End Wrenches
- B05** 4 PC: 10, 13, 17, 19 mm C-GEAR Ratcheting Combination Wrenches (Straight)

B99-E41

41 Piece Wrench Set

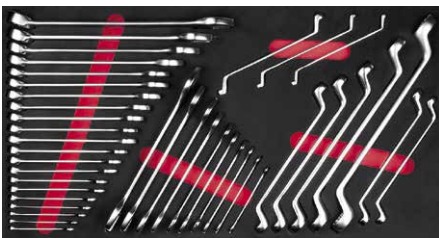

CODE NO	PIECES
B99-E41	41

- B01** 21 PC: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32 mm Combination Wrenches
- B09** 10 PC: 6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 18x19, 20x22, 24x27, 30x32 mm Double Open End Wrenches
- B14** 10 PC: 6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 18x19, 20x22, 24x27, 30x32 mm Double Ring End Wrenches

C30-E26HM2

26 Piece 3/4" Drive 6-Point Socket Set

new

CODE NO	PIECES
C30-E26HM2	26

- C72-H** 7 PC: 24, 27, 30, 32, 36, 41, 46 mm 3/4" Drive 6-Point Impact Sockets
- C71-91** 3/4" Drive Impact Socket Adaptor - F-3/4">M:1/2"
- C71-80** 3/4" Drive Impact Universal Joint
- C71-77** 3/4" Drive Impact Extension Bar - 250 mm / 10"
- C32-H** 12 PC: 22, 24, 27, 30, 32, 34, 36, 41, 46, 50, 55, 60 mm 3/4" Drive 6-Point Sockets
- C31-70** 2 PC: 200 mm/8", 400 mm/16" 3/4" Extension Bar
- C31-40** 3/4" Drive Sliding T-Handle
- C31-12-2** 3/4" Drive Quick Release Reversible Ratchet

CF-E105

105 Piece Screwdriver and 1/2" Drive Socket Bit Set



CODE NO	PIECES
CF-E105	105

- F10** 4 PC: 3.0x75, 4.0x100, 5.5x125, 6.5x150 mm C-PLUS Slotted Screwdrivers
- F14** 2 PC: PH1x80, PH2x100 mm C-PLUS Phillips Screwdrivers
- F10/TP** 5.5 x 25 mm C-PLUS Slotted Stubby Screwdriver
- F14/TP** PH2 x 25 mm C-PLUS Phillips Stubby Screwdriver
- F18** 7 PC: T10x80, T15x80, T20x100, T25x100, T27x115, T30x115, T40x130 C-PLUS TORX Screwdrivers
- F26/BT** Bit Driver - 1/4" x 100 mm
- CB/ST31** 31 PC: Slotted/PH/PZ/TORX/Hex. Bits, BT/02 Bit Holder
- F26/RDS** 12-in-1: Stubby Ratchet Bit Driver Set
- F26/BR2** Reversible Bit Ratchet#2 - 1/4" x 90 mm
- G09-VT30** Voltage Tester (for 110 to 250V-VDE Approved)
- G09-11** Car Electric Circuit Tester - 6/24 DC (V)
- LT/900** 9 PC: 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm Ball End Hexagon L Key Set (Long Arm)
- LT/700L** 8 PC: T9, T10, T15, T20, T25, T27, T30, T40 TORX L Key Set (Long Arm)
- C28S-H** 7 PC: (5, 6, 7, 8, 10, 12, 14) x 55 mm 1/2" Drive Hexagon Socket Bits - Short
- C28S-T** 9 PC: (T20, T25, T27, T30, T40, T45, T50, T55, T60) x 55 mm 1/2" Drive TORX Socket Bits - Short
- C28S-TL** 4 PC: (T30, T40, T45, T50) x 100 mm 1/2" Drive TORX Socket Bits - Long
- C28S-XL** 3 PC: (M6, M8, M14) x 100 mm 1/2" Drive XZN Socket Bits - Long
- C28S-XXL** 2 PC: (M10, M12) x 140 mm 1/2" Drive XZN Socket Bits - Extra Long
- C28S-X16** M16 x 55 mm 1/2" Drive XZN Socket Bits - Short

F99-E95

95 Piece Screwdriver and L/T Key Set



CODE NO	PIECES
F99-E95	95

- F10** 4 PC: 3x75, 4x100, 5.5x125, 6.5x150 mm C-PLUS Slotted Screwdrivers
- F14** 2 PC: PH1x80, PH2x100 mm C-PLUS Phillips Screwdrivers
- F10/TP** 5.5x25 mm C-PLUS Slotted Stubby Screwdriver
- F14/TP** PH2x25 mm C-PLUS Phillips Stubby Screwdriver
- F18** 7 PC: T10x80, T15x80, T20x100, T25x100, T27x115, T30x115, T40x130 mm C-PLUS TORX Screwdrivers
- F20** 5 PC: (6, 7, 8, 10, 13)x125 mm C-PLUS Nut Drivers
- H01** 4 PC: 1.5x40, 2x60, 2.5x80, 3x80 mm Electronics Slotted Screwdrivers
- H02** 2 PC: PH00x60, PH0x60 mm Electronics Phillips Screwdrivers
- K10** 6 PC: 2x100, 2.5x100, 3x100, 4x150, 5x150, 6x200 mm T-Handle Hexagon Key
- LT/900** 9 PC: 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm Ball End Hexagon L Key Set (Long Arm)
- LT/700L** 8 PC: T9, T10, T15, T20, T25, T27, T30, T40 TORX L Key Set (Long Arm)
- F26/BT** C-PLUS Bit Driver - 1/4" x 100 mm
- CB/ST31** 31 PC: Slotted/PH/PZ/TORX/Hex. Bits, BT/02 Bit Holder
- F26/RDS** 12-in-1: Stubby Ratchet Bit Driver Set
- F26/BR2** Reversible Bit Ratchet#2 - 1/4" x 90 mm
- G09-VT30** Voltage Tester (for 110 to 250V-VDE Approved)

FR-E79

79 Piece Screwdriver and L Key Set


new

CODE NO	PIECES
FR-E79	79

- R36** 4 PC: Straight Pick, Angle Pick, Hook Pick, 90° Pick
- R37-25** Seal Scraper - 25 x 150 mm
- N31-12** 150 mm Trim Clip Removal Tool
- F10** 5 PC: 3x75, 4x100, 5.5x125, 6.5x150, 8x175 mm C-PLUS Slotted Screwdrivers
- F10C** 12 x 200 mm C-PLUS Slotted Screwdrivers (Impact Capped)
- F14** 3 PC: PH1x80, PH2x100, PH3x150 mm C-PLUS Phillips Screwdrivers
- F18** 6 PC: T10x80, T15x80, T20x100, T25x100, T30x115, T40x130 mm C-PLUS TORX Screwdrivers
- F20** 5 PC: (6, 7, 8, 10, 13)x125 mm C-PLUS Nut Drivers
- F26/BT** C-PLUS Bit Driver - 1/4" x 100 mm
- CB/ST31** 31 Piece Bit Set
- LT/900** 9 PC: 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm Ball End Hexagon L Key Set (Long Arm)
- LT/700L** 8 PC: T9, T10, T15, T20, T25, T27, T30, T40 TORX L Key Set (Long Arm)
- L** 4 PC: 12, 14, 17, 19 mm Hexagon L Keys (Short Arm)

01 Tool Containers and Assortments

CFS



700x370 mm

E99-E18 18 Piece Pliers Set

new



CODE NO	PIECES
E99-E18	18

- E30Q-54 **3 PC:** 180, 250, 300 mm Water Pump Pliers (Push Button)
- E50-2 **3 PC:** 140, 190, 240 mm Grip Pliers (Curved Jaws)
- E01-41-0180 180 mm Combination Pliers (Polished Finish / DuoTech Handles)
- E06-41-0160 160 mm Diagonal Cutters (Polished Finish / DuoTech Handles)
- E15-41-0200 200 mm Long Nose Pliers (Polished Finish / DuoTech Handles)
- E16-41-0200 200 mm Bent Long Nose Pliers (Polished Finish / DuoTech Handles)
- E65-44-0225 External Circlip Pliers (Straight-with Spring) - 225 mm (40-100 mm)
- E66-44-0225 External Circlip Pliers (Bent-with Spring) - 225 mm (40-100 mm)
- E67-44-0225 Internal Circlip Pliers (Straight) - 225 mm (40-100 mm)
- E68-44-0225 Internal Circlip Pliers (Bent) - 225 mm (40-100 mm)
- N12-P16 **3 PC:** Ø15x155, Ø30x185, Ø52x250 mm Flexible Hose Clamps
- N12-12 CV Joint Boot Band Pliers (Heavy Duty)

EL-E34 34 Piece Tool Set



CODE NO	PIECES
EL-E34	34

- E01-41 180 mm Combination Pliers
- E06-41 160 mm Diagonal Cutter
- E15-41 200 mm Long Nose Pliers
- E16-41 200 mm Bent Long Nose Pliers
- E30-54 250 mm Water Pump Pliers (Box Joint)
- E50-2 240 mm Grip Pliers (Curved Jaws)
- E65-44 180 mm External Circlip Pliers (Straight-with Spring)
- E66-44 180 mm External Circlip Pliers (Bent-with Spring)
- E67-44 180 mm Internal Circlip Pliers (Straight-without Spring)
- E68-44 180 mm Internal Circlip Pliers (Bent-without Spring)
- N12-10 Hose Clamp Pliers (for Spring Band Hose Clamps)
- J45CPM C-Pro Utility Knife (Metal Body) - 18 mm
- J45-R 18 mm Snap-Off Knife Blade - 10 Pieces
- L01-500 Machinist's Hammer - 500 gr
- L12-40-2 Soft Face Hammer - Ø40 mm
- L12-R40-2 Spare Plastic Head (for L12-40-2) - Single
- L25-200-2 Flat Chisel - 24x 200 mm
- L29-4 Centre Punch - Ø4 x 120 mm
- L31 **4 PC:** Ø(3, 4, 5, 6) x 150 mm Parallel Pin Punch
- P05-0519 Compact Tape Measure (5 M x 19 mm)
- P15-030 Stainless Steel Rule - 30 cm
- P54-205 Feeler Gauge (Metric) - 20 Leaf (0,05 - 1,0 mm)

JLR-E34 34 Piece Tool Set

new



CODE NO	PIECES
JLR-E34	34

- L25-250-2 Flat Chisel - 250 mm
- L01 **2 PC:** (500, 2000) gr Machinist's Hammers (Wooden Handle)
- L12-40-2 Soft Face Hammer - Ø40 mm
- L20-0403 Pry Bar (with pointed and leverage ends) (400 mm)
- P05-0519 Tape Measure - 5 M x 19 mm
- R20R Telescoping Inspection Mirror (Round-L) - Ø50 x Max: 900 mm
- P15-030 Stainless Steel Rule - 30 cm
- L27 **2 PC:** 12x125, 16x150 mm Cold Flat Chisels
- L28-125 5x125 mm Cross Cut Chisel
- L29-4 4x120 mm Centre Punch
- L30-3 3x120 mm Taper Pin Punch
- L31-4 4x150 mm Parallel Pin Punch
- J45CPM C-Pro Snap-Off Knife (Metal Body) - 18 mm
- J45-R 18 mm Snap-Off Knife Blade - 10 Pieces
- J55-108H Hand File (Bastard) 8" - 200 mm
- J56-108H Half-Round File (Bastard) 8" - 200 mm
- J57-108H Round File (Bastard) 8" - 200 mm
- J58-108H Square File (Bastard) 8" - 200 mm
- J59-108H Three Square File (Bastard) 8" - 200 mm
- N14-032 Oil Filter Wrenches (with Double Chain) - Ø 60-160 mm
- R40-4 Steel Wire Brush (4 Row) - 275 mm
- R10-COM1 Compact Rechargeable LED Work Light - 400 Lumen
- R15-1000 Magnetic Pick-Up Tool (Flexible Shaft) - Cap.:1590 gr

JLR-E62 62 Piece Tool Set



CODE NO	PIECES
JLR-E62	62

- J55-108H Hand File (Bastard) - 20 x 200 mm
- J56-108H Half-Round File (Bastard) - 20 x 200 mm
- J57-108H Round File (Bastard) - Ø7.5 x 200 mm
- J58-108H Square File (Bastard) - 8 x 200 mm
- J59-108H Three Square File (Bastard) - 15 x 200 mm
- J75-R06 **6 PC:** Needle File Set
- J45CPM C-Pro Utility Knife (Metal Body) - 18 mm
- J45-R 18 mm Snap-Off Knife Blade - 10 Pieces
- L01-500 Machinist's Hammer - 500 gr
- L12-40-2 Soft Face Hammer - Ø40 mm
- L12-R40-2 Spare Plastic Head (for L12-40-2) - Single
- L25-200-2 Flat Chisel - 24x 200 mm
- L29-4 Centre Punch - Ø4 x 120 mm
- L31 **4 PC:** Ø(3, 4, 5, 6) x 150 mm Parallel Pin Punch
- P05-0519 Compact Tape Measure (5 M x 19 mm)
- P15-030 Stainless Steel Rule - 30 cm
- P54-205 Feeler Gauge (Metric) - 20 Leaf (0,05 - 1,0 mm)
- R11-PEN Stylus LED Flashlight - 100 lumen
- R15-1000 Magnetic Pick-Up Tool (Cap: 1000 gr) - 400 mm
- A205210 **19 PC:** 1, 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7, 7.5, 8, 8.5, 9, 9.5, 10 mm HSS Drill Bit Set
- R35CT Carbide Tipped Scriber - 145 mm
- R36 Serisi **4 PC:** Straight Pick, Angle Pick, Hook Pick, 90° Pick
- R37-25 Seal Scraper - 25 x 150 mm
- R40-4 Steel Wire Brush (4 Row) - 275 mm


KNR-E37 37 Piece Tool Set




CODE NO	PIECES
KNR-E37	37

- K20 **4 PC:** (7, 8, 10, 13)x125 mm T-Handle Nut Drivers
- K10 **6 PC:** 2x100, 2.5x100, 3x100, 4x150, 5x150, 6x200mm T-Handle Hexagon Keys
- K12 **7 PC:** T10x100, T15x100, T20x150, T25x150, T27x150, T30x150, T40x150 mm T-Handle TORX Keys
- N12-05 Antifreeze Tester - 200 mm
- N14-06R **4 PC:** Spare Strap (for N14-0615)
- N21-10 Brake Caliper Brush - 220 mm
- N31-1105 **5 PC:** Trim and Upholstery Removal Set
- N31-12 Trim Clip Removal Tool - 150 mm
- R11-PEN Stylus LED Flashlight - 100 lumen
- R15-1000 Magnetic Pick-Up Tool (Cap.: 1000 gr)
- R36 Serisi **4 PC:** Straight Pick, Angle Pick, Hook Pick, 90° Pick
- R37-25 Seal Scraper - 25 x 150 mm



**B01-E21/2**

21 Piece Combination Wrench Set




CODE NO	PIECES
B01-E21/2	21

B01 **21 PC:** 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32 mm Combination Wrenches

B99-E24

24 Piece Combination and Double Open End Wrench Set




CODE NO	PIECES
B99-E24	24

B01 **16 PC:** 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 22, 24 mm Combination Wrenches
B10 **8 PC:** 6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 18x19, 20x22 mm Double Open End Wrenches

B99-E241

24 Piece Combination and Double Ring End Wrench Set




CODE NO	PIECES
B99-E241	24

B01 **16 PC:** 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 22, 24 mm Combination Wrenches
B14 **8 PC:** 6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 18x19, 20x22 mm Double Ring End Wrenches

B99-E32

32 Piece Wrench Set




CODE NO	PIECES
B99-E32	32

B01 **16 PC:** 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 22, 24 mm Combination Wrenches
B09 **8 PC:** 6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 18x19, 20x22 mm Double Open End Wrenches
B14 **8 PC:** 6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 18x19, 20x22 mm Double Ring End Wrenches

B99A-E26

26 Piece Combination and Double Open End Wrench Set - SAE



CODE NO	PIECES
B99A-E26	26

B01A **16 PC:** 1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1 1/16, 1 1/8, 1 1/4 inch Combination Wrenches - SAE
B09A **10 PC:** 1/4x5/16, 5/16x3/8, 7/16x1/2, 1/2x9/16, 9/16x5/8, 5/8x3/4, 11/16x3/4, 13/16x7/8, 15/16x1, 1-1/16x1-1/8 inch Double Open End Wrenches - SAE

B99A-E31

31 Piece Wrench Set - SAE



CODE NO	PIECES
B99A-E31	31

B01AS 7/32 inch Combination Wrench (12 Point - Short) - SAE
B01A **15 PC:** 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1 inch Combination Wrenches - SAE
B07A **4 PC:** 1/4x5/16, 5/16x11/32, 3/8x7/16, 1/2x9/16 inch Ratchet Ring Wrenches (Straight)- SAE
B09SA **9 PC:** 7/32, 15/64, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2 inch Short Angle Open End Wrenches - SAE
B21-B **2 PC:** 150, 250 mm Adjustable Wrenches (Phosphated)

BC-E08

8 Piece Tool Set




CODE NO	PIECES
BC-E08	8

B01 **3 PC:** 27, 30, 32 mm Combination Wrenches
B14 **2 PC:** 24x27, 30x32 mm Double Ring End Wrenches
C21-79W 1/2" Drive Wobble Extension Bar - 500 mm
C31-40 3/4" Drive Sliding T-Handle- 500 mm
N23-0750 Tyre Lever - (500 mm : 20")

BC-E081

8 Piece Tool Set



CODE NO	PIECES
BC-E081	8

B01 **3 PC:** 27, 30, 32 mm Combination Wrenches
B14 **2 PC:** 21x23, 24x26 mm Double Ring End Wrenches
C21-79W 1/2" Drive Wobble Extension Bar - 500 mm
C31-40 3/4" Drive Sliding T-Handle- 500 mm
N23-0750 Tyre Lever - (500 mm : 20")

BC-E25

25 Piece 1/2" Drive Impact Socket and Combination Wrench Set




CODE NO	PIECES
BC-E25	25

B01 **5 PC:** 30, 32, 34, 36, 41 mm Combination Wrenches
C64-H **16 PC:** 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32 mm 1/2" Drive 6-Point Impact Deep Sockets
C64-B **2 PC:** 34, 36 mm 1/2" Drive 12-Point Impact Deep Sockets
C61-80 1/2" Drive Impact Universal Joint
C61-74 1/2" Drive Impact Extension Bar- 125 mm / 5"

new

01 Tool Containers and Assortments



525x370 mm

BC-E40

40 Piece C-GEAR Ratcheting Combination Wrench and 1/2" Drive Socket Bit Set



CODE NO	PIECES
BC-E40	40
B05	6 PC: 8, 10, 12, 13, 17, 19 mm C-GEAR Ratcheting Combination Wrenches (Straight)
B19	10x11 mm Flare Nut Wrench
C28S-T	8 PC: (T25, T27, T30, T40, T45, T50, T55, T60) x 55 mm 1/2" Drive TORX Socket Bits - Short
C28S-H	9 PC: (5, 6, 7, 8, 10, 12, 14, 17, 19) x 55 mm 1/2" Drive Hexagon Socket Bits - Short
C28S-HBXL	4 PC: (6, 7, 8, 10 mm) x 140 mm 1/2" Drive Ball End Hexagon Socket Bits - Extra Long
C28S-X	7 PC: (M5, M6, M8, M10, M12, M14, M16) x 55 mm 1/2" Drive XZN Socket Bits - Short
C28S-XL	2 PC: (M8, M14) x 100 mm 1/2" Drive XZN Socket Bits - Long
C28S-XXL	2 PC: (M10, M12) x 140 mm 1/2" Drive XZN Socket Bits - Extra Long
C68-X18	M18 x 78 mm 1/2" Drive Impact XZN Socket Bit

C99-E68H2


68 Piece 1/4" + 1/2" Drive 6-Point Socket Set



CODE NO	PIECES
C99-E68H2	68
C02-H	11 PC: 4, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13 mm 1/4" Drive 6-Point Socket
C01-12	1/4" Drive Quick Release Reversible Ratchet
C01-20	1/4" Drive Spinner Handle (120 mm)
C01-40	1/4" Drive Sliding T-Handle (115 mm)
C01-73	1/4" Drive Extension Bar (100 mm)
C01-80	1/4" Drive Universal Joint
F26/BT	C-PLUS Bit Driver - 1/4" x 100 mm
BT/8001	1/4" Drive Bit Holder Socket (for 1/4" Bits)
CB/610	3 PC: 4, 5, 5.5, 6.5 mm Slotted Bits
CB/250	2 PC: PH1, PH2 Phillips Bits
CB/350	2 PC: PZ1, PZ2 Pozidriv Bits
CB/800	6 PC: T10, T15, T20, T25, T30, T40 TORX Bits
CB/1800	4 PC: 3, 4, 5, 6 mm Hexagon Bits
C22-H	16 PC: 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32 mm 1/2" Drive 6-Point Sockets
C21-12	1/2" Drive Quick Release Reversible Ratchet
C21-40	1/2" Drive Sliding T-Handle (250 mm)
C21-70	2 PC: 125, 250 mm 1/2" Drive Extension Bar
C21-80	1/2" Drive Universal Joint
BT/8007	1/2" Drive Bit Holder Socket (for 5/16" Bits)
CB/516SL	10 mm 5/16" Slotted Bit (Impact Grade)
CB/516PH	3 PC: PH2, PH3, PH4 5/16" Phillips Bits (Impact Grade)
CB/516TX	4 PC: T30, T40, T45, T50 5/16" TORX Bits (Impact Grade)
CB/516HX	3 PC: 5, 6, 8 mm 5/16" Hexagon Bits (Impact Grade)

C99A-E96BMR

96 Piece 1/4" + 1/2" Drive 12-Point Socket Set- SAE




CODE NO	PIECES
C99A-E96BMR	96
C02A-B	10 PC: 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2, 9/16 inch 1/4" Drive 12-Point Sockets - SAE
C04A-B	10 PC: 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2, 9/16 inch 1/4" Drive 12-Point Deep Sockets - SAE
C08S-S	3 PC: 4, 5, 5.5, 6.5 mm 1/4" Drive Slotted Socket Bits
C08S-PH	2 PC: PH1, PH2 1/4" Drive Phillips Socket Bits
C08S-PZ	2 PC: PZ1, PZ2 1/4" Drive Pozidriv Socket Bits
C08S-T	8 PC: T8, T10, T15, T20, T25, T27, T30, T40 1/4" Drive TORX Socket Bits
C08AS-H	11 PC: 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4, 5/16 inch 1/4" Drive Hexagon Socket Bits - SAE
C01-T90	1/4" Drive T90 Sealed Reversible Ratchet
C01-20	1/4" Drive Spinner Handle (150 mm)
C01-40	1/4" Drive Sliding T-Handle (115 mm)
C01-70	2 PC: 50, 150 mm 1/4" Drive Extension Bar
C01-75F	1/4" Drive Flexible Extension Bar - 150 mm
C01-80	1/4" Drive Universal Joint
C01-92	1/4" Socket Adaptor - (F: 1/4" - M: 3/8")
BT/8001	1/4" Drive Bit Holder Socket (for 1/4" Bits)
CB/800T	7 PC: T10, T15, T20, T25, T27, T30, T40 1/4" TORX Tamper Resistant Bits
C22A-B	15 PC: 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-3/16, 1-1/4 inch 1/2" Drive 12-Point Sockets - SAE
C21-T90	1/2" Drive T90 Sealed Reversible Ratchet
C21-40	1/2" Drive Sliding T-Handle (250 mm)
C21-70	2 PC: 125, 250 mm 1/2" Drive Extension Bar
C21-80	1/2" Drive Universal Joint
C21-91S	1/2" Drive Socket Adaptor (F: 1/2" - M: 3/8")
C21-92	1/2" Drive Socket Adaptor (F: 1/2" - M: 3/4")
BT/8007	1/2" Drive Bit Holder Socket (for 5/16" Bits)
CB/516SL	10 mm 5/16" Slotted Bit (Impact Grade)
CB/516PH	3 PC: PH2, PH3, PH4 5/16" Phillips Bits (Impact Grade)
CB/516TX	4 PC: T30, T40, T45, T50 5/16" TORX Bits (Impact Grade)
CB/516HX	3 PC: 5, 6, 8 mm 5/16" Hexagon Bits (Impact Grade)

C99-E99H2

99 Piece 1/4" + 1/2" Drive 6-Point Socket Set



CODE NO	PIECES
C99-E99H2	99
C02-H	12 PC: 4, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 mm 1/4" Drive 6-Point Sockets
C04-H	11 PC: 4, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13 mm 1/4" Drive 6-Point Deep Sockets
C08S-S	3 PC: 4, 5, 5.5, 6.5 mm 1/4" Drive Slotted Socket Bits
C08S-PH	2 PC: PH1, PH2 1/4" Drive Phillips Socket Bits
C08S-PZ	2 PC: PZ1, PZ2 1/4" Drive Pozidriv Socket Bits
C08S-T	8 PC: T8, T10, T15, T20, T25, T27, T30, T40 1/4" Drive TORX Socket Bits
C08S-H	5 PC: 3, 4, 5, 6, 8 mm 1/4" Drive Hexagon Socket Bits
C01-12	1/4" Drive Quick Release Reversible Ratchet
C01-20	1/4" Drive Spinner Handle (150 mm)
C01-40	1/4" Drive Sliding T-Handle (115 mm)
C01-70	2 PC: 50, 150 mm 1/4" Drive Extension Bar
C01-75F	1/4" Drive Flexible Extension Bar - 150 mm
C01-80	1/4" Drive Universal Joint
C01-92	1/4" Socket Adaptor - (F: 1/4" - M: 3/8")
BT/8001	1/4" Drive Bit Holder Socket (for 1/4" Bits)
CB/800T	7 PC: T10, T15, T20, T25, T27, T30, T40 TORX Tamper Resistant Bits
C22-H	18 PC: 8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32 mm 1/2" Drive 6-Point Sockets
C24-H	3 PC: 13, 17, 19 mm 1/2" Drive 6-Point Deep Sockets
C21-12	1/2" Drive Quick Release Reversible Ratchet
C21-40	1/2" Drive Sliding T-Handle (250 mm)
C21-70	2 PC: 125, 250 mm 1/2" Drive Extension Bar
C21-80	1/2" Drive Universal Joint
C21-91S	1/2" Drive Socket Adaptor (F: 1/2" - M: 3/8")
C21-92	1/2" Drive Socket Adaptor (F: 1/2" - M: 3/4")
BT/8007	1/2" Drive Bit Holder Socket (for 5/16" Bits)
CB/516SL	10 mm 5/16" Slotted Bit (Impact Grade)
CB/516PH	3 PC: PH2, PH3, PH4 5/16" Phillips Bits (Impact Grade)
CB/516TX	4 PC: T30, T40, T45, T50 5/16" TORX Bits (Impact Grade)
CB/516HX	3 PC: 5, 6, 8 mm 5/16" Hexagon Bits (Impact Grade)



525x370 mm

C99-E115H2

115 Pc. 1/4"+3/8"+1/2" Drive 6-Point Socket Set



CODE NO	PIECES
C99-E115H2	115
C02-H	12 PC: 4, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 mm 1/4" Drive 6-Point Socket
C04-H	8 PC: 4, 5, 5.5, 6, 7, 8, 9, 10 mm 1/4" Drive 6-Point Deep Sockets
C08S-S	3 PC: 4, 5, 5.5, 6.5 mm 1/4" Drive Slotted Socket Bits
C08S-PH	2 PC: PH1, PH2 1/4" Drive Phillips Socket Bits
C08S-PZ	2 PC: PZ1, PZ2 1/4" Drive Pozidriv Socket Bits
C08S-T	8 PC: T8, T10, T15, T20, T25, T27, T30, T40 1/4" Drive TORX Socket Bits
C08S-H	5 PC: 3, 4, 5, 6, 8 mm 1/4" Drive Hexagon Socket Bits
C01-12	1/4" Drive Quick Release Reversible Ratchet
C01-20	1/4" Drive Spinner Handle (150 mm)
C01-40	1/4" Drive Sliding T-Handle (115 mm)
C01-70	2 PC: 50, 150 mm 1/4" Drive Extension Bar
C01-75F	1/4" Drive Flexible Extension Bar- 150 mm
C01-80	1/4" Drive Universal Joint
C01-92	1/4" Socket Adaptor- (F: 1/4" - M: 3/8")
BT/8001	1/4" Drive Bit Holder Socket (for 1/4" Bits)
CB/800T	7 PC: T10, T15, T20, T25, T27, T30, T40 TORX Tamper Resistant Bits
C12-H	14 PC: 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22 mm 3/8" Drive 6-Point Sockets
C14-H	5 PC: 11, 12, 13, 14, 15 mm 3/8" Drive 6-Point Deep Sockets
C11-12	3/8" Drive Quick Release Reversible Ratchet
C11-40	3/8" Drive Sliding T-Handle (200 mm)
C11-70	2 PC: 75, 150 mm 3/8" Drive Extension Bar
C11-80	3/8" Drive Universal Joint
C11-91	3/8" Socket Adaptor- (F: 3/8" - M: 1/4")
C11-92S	3/8" Socket Adaptor- (F: 3/8" - M: 1/2")
C22-H	18 PC: 8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32 mm 1/2" Drive 6-Point Sockets
C24-H	6 PC: 16, 17, 18, 19, 22, 24 mm 1/2" Drive 6-Point Deep Sockets
C27-R	2 PC: 16, 21 mm 1/2" Drive Spark Plug Sockets (Retaining Rubber)
C21-12	1/2" Drive Quick Release Reversible Ratchet
C21-40	1/2" Drive Sliding T-Handle (250 mm)
C21-70	2 PC: 125, 250 mm 1/2" Drive Extension Bar
C21-80	1/2" Drive Universal Joint
C21-91S	1/2" Drive Socket Adaptor (F:1/2" - M:3/8")
C21-92	1/2" Drive Socket Adaptor (F:1/2" - M:3/4")

C99-E95H2

95 Piece 1/4"+ 1/2" Drive 6-Point Socket Set



CODE NO	PIECES
C99-E95H2	95
C02-H	12 PC: 4, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 mm 1/4" Drive 6-Point Socket
C06	5 PC: E4, E5, E6, E7, E8 1/4" Drive E-TORX Sockets
C08S-S	5.5 mm 1/4" Drive Slotted Socket Bit
C08S-PH	2 PC: PH1, PH2 1/4" Drive Phillips Socket Bits
C08S-T	9 PC: T6, T7, T8, T9, T10, T15, T20, T25, T27 1/4" Drive TORX Socket Bits
C08S-H	4 PC: 3, 4, 5, 6 mm 1/4" Drive Hexagon Socket Bits
C01-12	1/4" Drive Quick Release Reversible Ratchet
C01-20	1/4" Drive Spinner Handle (150 mm)
C01-70	3 PC: 50, 100, 150 mm 1/4" Drive Extension Bar
C01-80	1/4" Drive Universal Joint
C01-92	1/4" Socket Adaptor- (F: 1/4" - M: 3/8")
C11-91	3/8" Socket Adaptor- (F: 3/8" - M: 1/4")
C11-92S	3/8" Socket Adaptor- (F: 3/8" - M: 1/2")
C22-H	17 PC: 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32 mm 1/2" Drive 6-Point Sockets
C22-B	8, 9, 10, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32 mm 1/2" Drive 6-Point Sockets
C26	6 PC: E10, E12, E14, E16, E18, E20 1/2" Drive E-TORX Sockets
C64W-H	2 PC: 17, 19 mm 1/2" Drive DuraMAX Impact Wheel Nut Socket
C21-12	1/2" Drive Quick Release Reversible Ratchet
C21-40	1/2" Drive Sliding T-Handle (250 mm)
C21-70W	3 PC: 50, 125, 250 mm 1/2" Drive Wobble Extension Bars
C21-80	1/2" Drive Universal Joint
C21-91S	1/2" Drive Socket Adaptor (F:1/2" - M:3/8")
C21-92	1/2" Drive Socket Adaptor (F:1/2" - M:3/4")
C31-91	3/4" Drive Socket Adaptor (F:3/4" - M:1/2)
C62-B	2 PC: 32, 36 mm 1/2" Drive 12-Point Impact Socket


C99-E114H2

114 Pc 1/4"+3/8"+1/2" Drive 6-Point Socket Set



CODE NO	PIECES
C99-E114H2	114
B17	4 PC: E6xE8, E10xE12, E14xE18, E20xE24 E-TORX Ring Wrenches
C02-H	12 PC: 4, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 mm 1/4" Drive 6-Point Socket
C06	5 PC: E4, E5, E6, E7, E8 1/4" Drive E-TORX Sockets
C08S-S	3 PC: 4.0, 5.5, 6.5 mm 1/4" Drive Slotted Socket Bits
C08S-PH	2 PC: PH1, PH2 1/4" Drive Phillips Socket Bits
C08S-PZ	2 PC: PZ1, PZ2 1/4" Drive Pozidriv Socket Bits
C08S-H	5 PC: 3, 4, 5, 6, 8 mm 1/4" Drive Hexagon Socket Bits
C01-12	1/4" Drive Quick Release Reversible Ratchet
C01-20	1/4" Drive Spinner Handle (150 mm)
C01-40	1/4" Drive Sliding T-Handle (115 mm)
C01-70	2 PC: 50, 150 mm 1/4" Drive Extension Bar
C01-80	1/4" Drive Universal Joint
C01-92	1/4" Socket Adaptor- (F: 1/4" - M: 3/8")
C12-H	12 PC: 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22 mm 3/8" Drive 6-Point Sockets
C16	4 PC: E10, E11, E12, E14 3/8" Drive Universal Joint
C11-12	3/8" Drive Quick Release Reversible Ratchet
C11-70	3 PC: 75, 150, 250 mm 3/8" Drive Extension Bar
C11-80	3/8" Universal Joint
C11-91	3/8" Socket Adaptor- (F: 3/8" - M: 1/4")
C11-92S	3/8" Socket Adaptor- (F: 3/8" - M: 1/2")
C22-B	20 PC: 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 26, 27, 28, 30, 32 mm 1/2" Drive 12-Point Sockets
C26	4 PC: E16, E18, E20, E24 1/2" Drive E-TORX Sockets
C64W-H	2 PC: 17, 19 mm 1/2" Drive DuraMAX Impact Wheel Nut Socket
C21-12	1/2" Drive Quick Release Reversible Ratchet
C21-40	1/2" Drive Sliding T-Handle (250 mm)
C21-70W	3 PC: 50, 125, 250 mm 1/2" Drive Wobble Extension Bars
C21-80	1/2" Drive Universal Joint
C21-91S	1/2" Drive Socket Adaptor (F:1/2" - M:3/8")
C21-92	1/2" Drive Socket Adaptor (F:1/2" - M:3/4")
C62-B	3 PC: 32, 34, 36 mm 1/2" Drive 12-Point Impact Sockets
C31-91	3/4" Drive Socket Adaptor (F:3/4" - M:1/2)
CB/800	5 PC: T5, T6, T7, T8, T9 TORX Bits
CB/800T	7 PC: T10, T15, T20, T25, T27, T30, T40 TORX Tamper Resistant Bits
BT/8001	1/4" Drive Bit Holder Socket (for 1/4" Bits)

01 Tool Containers and Assortments



C99-E77H2


77 Pc 1/4" + 1/2" Drive 6-Point Socket and Socket Bits Set



CODE NO	PIECES
C99-E77H2	77
C02-H	12 PC: 4, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 mm 1/4" Drive 6-Point Socket
C04-H	11 PC: 4, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13 mm 1/4" Drive 6-Point Deep Sockets
C08S-S	3 PC: 4, 5, 5.5, 6.5 mm 1/4" Drive Slotted Socket Bits
C08S-PH	2 PC: PH1, PH2 1/4" Drive Phillips Socket Bits
C08S-PZ	2 PC: PZ1, PZ2 1/4" Drive Pozidriv Socket Bits
C08S-H	5 PC: 3, 4, 5, 6, 8 mm 1/4" Drive Hexagon Socket Bits
C01-12	1/4" Drive Quick Release Reversible Ratchet
C01-20	1/4" Drive Spinner Handle (150 mm)
C01-40	1/4" Drive Sliding T-Handle (115 mm)
C01-70	2 PC: 50, 150 mm 1/4" Drive Extension Bar
C01-80	1/4" Drive Universal Joint
C01-92	1/4" Socket Adaptor- (F: 1/4" - M: 3/8")
C22-H	17 PC: 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32 mm 1/2" Drive 6-Point Sockets
C28S-H	8 PC: 5, 6, 7, 8, 10, 12, 14, 17 mm 1/2" Drive Hexagon Socket Bits
C64W-H	2 PC: 17, 19 mm 1/2" Drive DuraMAX Impact Wheel Nut Socket
C21-12	1/2" Drive Quick Release Reversible Ratchet
C21-40	1/2" Drive Sliding T-Handle (250 mm)
C21-70	2 PC: 125, 250 mm 1/2" Drive Extension Bars
C21-71W	50 mm 1/2" Drive Wobble Extension Bar
C21-80	1/2" Drive Universal Joint
C21-91S	1/2" Drive Socket Adaptor (F: 1/2" - M: 3/8")
C21-92	1/2" Drive Socket Adaptor (F: 1/2" - M: 3/4")

C99-E79H2


79 Piece 3/8" Drive 6-Point Socket and TORX Tool Set



CODE NO	PIECES
C99-E79H2	79
B17	4 PC: E6xE8, E10xE12, E14xE18, E20xE24 E-TORX Ring Wrenches
B19	10x11 mm Flare Nut Wrench
C06	5 PC: E4, E5, E6, E7, E8 1/4" Drive E-TORX Sockets
C12-H	15 PC: 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22 mm 3/8" Drive 6-Point Sockets
C14-H	4 PC: 10, 11, 12, 13 mm 3/8" Drive 6-Point Deep Sockets
C12U-B	10 PC: 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm 3/8" Drive 12-Point Jointed Sockets
C16	4 PC: E10, E11, E12, E14 3/8" Drive E-TORX Sockets
C18S-H	9 mm 3/8" Drive Hexagon Socket Bits
C18S-T	4 PC: T40, T45, T50, T55 3/8" Drive TORX Socket Bits
C11-12	3/8" Drive Quick Release Reversible Ratchet
C11-40	3/8" Drive Sliding T-Handle (200 mm)
C11-70	3 PC: 75, 150, 250 mm 3/8" Drive Extension Bar
C11-80	3/8" Drive Universal Joint
C11-91	3/8" Socket Adaptor- (F: 3/8" - M: 1/4")
C11-92S	3/8" Socket Adaptor- (F: 3/8" - M: 1/2")
C26	4 PC: E16, E18, E20, E24 1/2" Drive E-TORX Sockets
C28S-T	3 PC: T50, T55, T60 1/2" Drive TORX Socket Bits
CB/800	4 PC: T6, T7, T8, T9 TORX Bits
CB/800T	7 PC: T10, T15, T20, T25, T27, T30, T40 TORX Tamper Resistant Bits
BT/8001	1/4" Drive Bit Holder Socket (for 1/4" Bits)
CB/3000G	3 PC: (M6, M8, M10) x 30 mm H10 Drive XZN (Spline) Bits- Short
BT/8005	3/8" Drive Bit Holder Socket (for H10 Bits)

C99A-E115BMR

115 Pc 1/4" + 3/8" Drive 12-Point Socket Set- SAE



CODE NO	PIECES
C99A-E115BMR	115
C02A-B	10 PC: 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2, 9/16 inch 1/4" Drive 12-Point Sockets - SAE
C02UA-B	9 PC: 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2, 9/16 inch 1/4" Drive 12-Point Joint Sockets - SAE
C04A-B	10 PC: 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2, 9/16 inch 1/4" Drive 12-Point Deep Sockets - SAE
C08AS-H	11 PC: 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4, 5/16 inch 1/4" Drive Hexagon Socket Bits - SAE
C01-T90	1/4" Drive T90 Sealed Reversible Ratchet
C01-20	1/4" Drive Spinner Handle (150 mm)
C01-70	2 PC: 50, 150 mm 1/4" Drive Extension Bar
C01-75F	1/4" Drive Flexible Extension Bar - (150 mm)
C01-80	1/4" Drive Universal Joint
C01-92	1/4" Socket Adaptor- (F: 1/4" - M: 3/8")
C12A-B	13 PC: 1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1 inch 3/8" Drive 12-Point Sockets - SAE
C14A-B	13 PC: 1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1 inch 3/8" Drive 12-Point Deep Sockets - SAE
C11-T90	3/8" Drive T90 Sealed Reversible Ratchet
C11-36MR	3/8" Drive Swivel Handle - 250 mm
C11-50MR	3/8" Drive Speeder Brace - Metal Palm Handle (420 mm)
C11-70	3 PC: 75, 150, 250 mm 3/8" Drive Extension Bar
C11-80	3/8" Drive Universal Joint
C11-91	3/8" Socket Adaptor- (F: 3/8" - M: 1/4")
CB/ST31	31 PC: Slotted/PH/PZ/TORX/Hex. Bits, BT/02 Bit Holder
F26/BR2	Reversible Bit Ratchet#2 - 1/4" x 90 mm
BT/8001	1/4" Drive Bit Holder Socket (for 1/4" Bits)
BT/8003	3/8" Drive Bit Holder Socket (for 1/4" Bits)



525x370 mm

CF-E108

108 Piece Screwdriver and TORX Tool Set



CODE NO	PIECES
CF-E108	108
F10	4 PC: 3.0x75, 4.0x100, 5.5x125, 6.5x150 mm C-PLUS Slotted Screwdrivers
F14	2 PC: PH1x80, PH2x100 mm C-PLUS Phillips Screwdrivers
F10/TP	5.5 x 25 mm C-PLUS Slotted Stubby Screwdriver
F14/TP	PH2 x 25 mm C-PLUS Phillips Stubby Screwdriver
F26/BT	C-PLUS Bit Driver - 1/4" x 100 mm
CB/ST31	31 PC: Slotted/PH/PZ/TORX/Hex. Bits, BT/02 Bit Holder
F26/RDS	12-in-1: Stubby Ratchet Bit Driver Set
F26/BR2	Reversible Bit Ratchet#2 - 1/4" x 90 mm
G09-VT30	Voltage Tester (for 110 to 250V-VDE Approved)
G09-11	Car Electric Circuit Tester - 6/24 DC (V)
F18	7 PC: T10x80, T15x80, T20x100, T25x100, T27x115, T30x115, T40x130 mm C-PLUS TORX Screwdrivers
LT/900	9 PC: 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm Ball End Hexagon L Key Set (Long Arm)
LT/700L	8 PC: T9, T10, T15, T20, T25, T27, T30, T40 TORX L Key Set (Long Arm)
C06	6 PC: E4, E5, E6, E7, E8, E10 1/4" Drive E-TORX Sockets
C26	6 PC: E12, E14, E16, E18, E20, E24 1/2" Drive E-TORX Sockets
C28S-T	9 PC: (T20, T25, T27, T30, T40, T45, T50, T55, T60) x 55 mm 1/2" Drive TORX Socket Bits - Short
C28S-TL	4 PC: (T30, T40, T45, T50) x 100 mm 1/2" Drive TORX Socket Bits - Long
C28S-XL	4 PC: (M6, M8, M10, M12) x 100 mm 1/2" Drive XZN Socket Bits - Long

EF-E27

27 Piece Tool Set



CODE NO	PIECES
EF-E27	27
4100M	4 PC: 3.0x75, 4.0x100, 5.5x125, 6.5x150 mm TOREX Slotted Screwdrivers
4200M	2 PC: PH1x80, PH2x100 mm TOREX Phillips Screwdrivers
1300M	5 PC: (6, 7, 8, 10, 13)x125 mm TOREX Nut Drivers
LT/9	9 PC: 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm Hexagon L Key Set (Short Arm)
G09-VT30	Voltage Tester (for 110 to 250V-VDE Approved)
E01-41	180 mm Combination Pliers
E06-41	160 mm Diagonal Cutter
E15-41	160 mm Long Nose Pliers
E30-54	250 mm Water Pump Pliers (Box Joint)
L01-500	Machinist's Hammer - 500 gr
L25-200-2	Flat Chisel - 24x 200 mm

F99-E81

81 Piece Screwdriver and T-Handle Key Set



CODE NO	PIECES
F99-E81	81
F10	4 PC: 3.0x75, 4.0x100, 5.5x125, 6.5x150 mm C-PLUS Slotted Screwdrivers
F14	2 PC: PH1x80, PH2x100 mm C-PLUS Phillips Screwdrivers
F10/TP	5.5 x 25 mm C-PLUS Slotted Stubby Screwdriver
F14/TP	PH2 x 25 mm C-PLUS Phillips Stubby Screwdriver
F20	5 PC: (6, 7, 8, 10, 13)x125 mm C-PLUS Nut Drivers
K10	6 PC: 2x100, 2.5x100, 3x100, 4x150, 5x150, 6x200 mm T-Handle Hexagon Key
LT/900	9 PC: 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm Ball End Hexagon L Key Set (Long Arm)
LT/700L	8 PC: T9, T10, T15, T20, T25, T27, T30, T40 TORX L Key Set (Long Arm)
F26/BT	C-PLUS Bit Driver - 1/4" x 100 mm
CB/ST31	31 PC: Slotted/PH/PZ/TORX/Hex. Bits, BT/02 Bit Holder
F26/RDS	12-in-1: Stubby Ratchet Bit Driver Set
G09-VT30	Voltage Tester (for 110 to 250V-VDE Approved)

F99A-E80

80 Piece Screwdriver and L/T Key Set - SAE



CODE NO	PIECES
F99A-E80	80
F10	4 PC: 3.0x75, 4.0x100, 5.5x125, 6.5x150 mm C-PLUS Slotted Screwdrivers
F14	2 PC: PH1x80, PH2x100 mm C-PLUS Phillips Screwdrivers
F10/TP	5.5 x 25 mm C-PLUS Slotted Stubby Screwdriver
F14/TP	PH2 x 25 mm C-PLUS Phillips Stubby Screwdriver
F20A	3 PC: (1/4, 5/16, 3/8 inch)x125 mm C-PLUS Nut Drivers - SAE
K10A	7 PC: 5/64x100, 3/32x100, 1/8x100, 5/32x150, 3/16x150, 1/4x150, 5/16x200 mm T-Handle Hexagon Keys - SAE
LT/900AF	9 PC: 1/16, 5/64, 3/32, 1/8, 5/32, 3/16, 1/4, 5/16, 3/8 inch Ball End Hexagon L Key Set (Long Arm) - SAE
LT/700L	8 PC: T9, T10, T15, T20, T25, T27, T30, T40 TORX L Key Set (Long Arm)
F26/BT	C-PLUS Bit Driver - 1/4" x 100 mm
CB/ST31	31 PC: Slotted/PH/PZ/TORX/Hex. Bits, BT/02 Bit Holder
F26/RDS	12-in-1: Stubby Ratchet Bit Driver Set
G09-VT30	Voltage Tester (for 110 to 250V-VDE Approved)

FJR-E46

46 Piece Tool Set

new



CODE NO	PIECES
FJR-E46	46
F10	2 PC: 10x200, 12x250 mm C-PLUS Slotted Screwdrivers (Flared Tip)
F21	2 PC: 6x150, 7x150 mm C-PLUS Nut Drivers (Flexible Shaft)
F18	5 PC: T5x60, T6x60, T7x60, T8x60, T9x60 mm C-PLUS TORX Screwdrivers
R15-1000	Magnetic Pick-Up Tool (Flexible Shaft) - Cap.:1590 gr
LT13/700	13 PC: T5, T6, T7, T8, T9, T10, T15, T20, T25, T27, T30, T40, T45 TORX L Key Set (Short Arm)
LT/900	9 PC: 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm Ball End Hexagon L Key Set (Long Arm)
J45CPM	C-Pro Snap-Off Knife (Metal Body) - 18 mm
J45-R	18 mm Snap-Off Knife Blade - 10 Pieces
J80-200	Flat Scraper - 200 mm
N12-05	Antifreeze Tester
R40-4	Steel Wire Brush (4 Row) - 275 mm


FLR-E36

36 Piece Tool Set



CODE NO	PIECES
FLR-E36	36
F20	4 PC: (7, 8, 10, 13)x125 mm C-PLUS Nut Drivers
J45CPM	C-Pro Utility Knife (Metal Body) - 18 mm
J45-R	18 mm Snap-Off Knife Blade - 10 Pieces
L01-500	Machinist's Hammer - 500 gr
L12-40-2	Soft Face Hammer - Ø40 mm
L12-R40-2	Spare Plastic Head (for L12-40-2) - Single
L25-200-2	Flat Chisel - 24x 200 mm
L29-4	Centre Punch - Ø4 x 120 mm
L31	4 PC: Ø(3, 4, 5, 6) x 150 mm Parallel Pin Punch
N21-10	Brake Caliper Brush - 220 mm
N31-12	Trim Clip Removal Tool - 150 mm
P05-0519	Compact Tape Measure (5 M x 19 mm)
P15-030	Stainless Steel Rule - 30 cm
P54-20S	Feeler Gauge (Metric) - 20 Leaf (0,05 - 1,0 mm)
R11-PEN	Stylus LED Flashlight - 100 Lumen
R15-1000	Magnetic Pick-Up Tool (Cap.: 1000 gr)
R36-1	Straight Pick
R36-2	Angle Pick
R36-3	90° Pick
R36-4	Hook Pick
R37-25	Seal Scraper - 25 x 150 mm

01 Tool Containers and Assortments



F99-E79

79 Piece Screwdriver and L/T Key Set



CODE NO	PIECES
F99-E79	79
F10	4 PC: 3.0x75, 4.0x100, 5.5x125, 6.5x150 mm C-PLUS Slotted Screwdrivers
F14	2 PC: PH1x80, PH2x100 mm C-PLUS Phillips Screwdrivers
F10/TP	5.5 x 25 mm C-PLUS Slotted Stubby Screwdriver
F14/TP	PH2 x 25 mm C-PLUS Phillips Stubby Screwdriver
F26/BT	C-PLUS Bit Driver - 1/4" x 100 mm
CB/ST31	31 PC: Slotted/PH/PZ/TORX/Hex. Bits, BT/02 Bit Holder
F26/RDS	12-in-1: Stubby Ratchet Bit Driver Set
F26/BR2	Reversible Bit Ratchet#2 - 1/4" x 90 mm
G09-VT30	Voltage Tester (for 110 to 250V-VDE Approved)
G09-11	Car Electric Circuit Tester - 6/24 DC (V)
F18	7 PC: T10x80, T15x80, T20x100, T25x100, T27x115, T30x115, T40x130 mm C-PLUS TORX Screwdrivers
LT/900	9 PC: 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm Ball End Hexagon L Key Set (Long Arm)
LT/700L	8 PC: T9, T10, T15, T20, T25, T27, T30, T40 TORX L Key Set (Long Arm)

EF-E34

34 Piece Tool Set



CODE NO	PIECES
EF-E34	34
F10	2 PC: 5.5x125, 8.0x150 mm C-PLUS Slotted Screwdrivers
F14	3 PC: PH0x80, PH1x80, PH2x100 mm C-PLUS Phillips Screwdrivers
3100/TF2	PH2/6.0 x 175 mm Reversible Screwdriver
Z/12	PH1/PH2 x 100 mm Offset Phillips Screwdriver
Z/40	4.0/4.0 x 100 mm Offset Slotted Screwdriver
LT/900AF	9 PC: 1/16, 5/64, 3/32, 1/8, 5/32, 3/16, 1/4, 5/16, 3/8 inch Ball End Hexagon L Key Set (Long Arm)-SAE
K99-F2M	9 PC: 0.05, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16 inch Foldup Hexagon Key Set (Metal Body)-SAE
E01-44	180 mm Combination Pliers
E06-44	160 mm Diagonal Cutter
E15-44	200 mm Long Nose Pliers
E16-44	160 mm Bent Long Nose Pliers
E30-54	250 mm Water Pump Pliers (Box Joint)
E80-230R	Wire Twisting Pliers (Reversible) - 230 mm
E50-2	2 PC: 140, 190 mm Grip Pliers (Curved Jaws)

EF-E72

72 Piece Tool Set



CODE NO	PIECES
EF-E72	72
F10	4 PC: 3.0x75, 4.0x100, 5.5x125, 6.5x150 mm C-PLUS Slotted Screwdrivers
F14	2 PC: PH1x80, PH2x100 mm C-PLUS Phillips Screwdrivers
LT/900	9 PC: 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm Ball End Hexagon L Key Set (Long Arm)
CB/ST31	31 PC: Slotted/PH/PZ/TORX/Hex. Bits, BT/02 Bit Holder
G09-VT30	Voltage Tester (for 110 to 250V-VDE Approved)
E01-41	180 mm Combination Pliers
E06-41	160 mm Diagonal Cutter
E15-41	160 mm Long Nose Pliers
E30-54	250 mm Water Pump Pliers (Box Joint)
J45C	Compact Utility Knife - 18 mm
J45-R	18 mm Snap-Off Knife Blade - 10 Pieces
L01-500	Machinist's Hammer - 500 gr
L25-200-2	Flat Chisel - 24x200 mm
L29-4	Centre Punch - Ø4 x 120 mm
L31	4 PC: Ø(3, 4, 5, 6) x 150 mm Parallel Pin Punch
P05-0519	Compact Tape Measure (5 M x 19 mm)
P15-030	Stainless Steel Rule- 30 cm
P54-205	Feeler Gauge (Metric) - 20 Leaf (0,05 - 1,0 mm)

E99-E10

10 Piece Pliers Set



CODE NO	PIECES
E99-E10	10
E01-41	180 mm Combination Pliers
E06-41	160 mm Diagonal Cutter
E15-41	200 mm Long Nose Pliers
E16-41	200 mm Bent Long Nose Pliers
E30-54	250 mm Water Pump Pliers (Box Joint)
E50-2	240 mm Grip Pliers (Curved Jaws)
E65-44	180 mm External Circclip Pliers (Straight-with Spring)
E66-44	180 mm External Circclip Pliers (Bent-with Spring)
E67-44	180 mm Internal Circclip Pliers (Straight-without Spring)
E68-44	180 mm Internal Circclip Pliers (Bent-without Spring)

EL-E28

28 Piece Tool Set



CODE NO	PIECES
EL-E28	28
E01-41	180 mm Combination Pliers
E06-41	160 mm Diagonal Cutter
E15-41	160 mm Long Nose Pliers
E30-54	250 mm Water Pump Pliers (Box Joint)
E50-2	240 mm Grip Pliers (Curved Jaws)
J45CPM	C-Pro Utility Knife (Metal Body) - 18 mm
J45-R	18 mm Snap-Off Knife Blade - 10 Pieces
L01-500	Machinist's Hammer - 500 gr
L12-40-2	Soft Face Hammer- Ø40 mm
L12-R40-2	Spare Plastic Head (for L12-40-2) - Single
L25-200-2	Flat Chisel - 24 x 200 mm
L29-4	Centre Punch - Ø4 x 120 mm
L31	4 PC: Ø(3, 4, 5, 6) x 150 mm Parallel Pin Punch
P05-0519	Compact Tape Measure (5 M x 19 mm)
P15-030	Stainless Steel Rule- 30 cm
P54-205	Feeler Gauge (Metric) - 20 Leaf (0,05 - 1,0 mm)

E55-E07

7 Piece Clamp Grip Pliers Set



CODE NO	PIECES
E55-E07	7
E55-2	2 PC: 2x280 mm Clamp Grip Pliers (C Jaw)
E55P-2	3 PC: 2x180, 300 mm Clamp Grip Pliers (C Jaw - Swivel Tip)
L25-250G-2	Flat Chisel (with Hand Guard) - 28x250 mm
R40-4	Steel Wire Brush (4 Row) - 275 mm



525x370 mm

E50-E16

16 Piece Grip Pliers Set



CODE NO	PIECES
E50-E16	16
E30-54	250 mm Water Pump Pliers (Box Joint)
E50-2	3 PC: 140, 190, 240 mm Grip Pliers (Curved Jaws)
E50L-2	2 PC: 170, 230 mm Long Nose Grip Pliers
E51-2	2 PC: 190, 240 mm Grip Pliers (Straight Jaws)
E52-2	240 mm Grip Pliers (Prism Jaws)
E52S-2	240 mm Grip Pliers (Multi-Purpose Jaws)
E56-J1	210 mm Axial Grip Pliers – J Jaws
E56-J2	235 mm Axial Grip Pliers – JJ Jaws
E56-L1	195 mm Axial Grip Pliers – L Jaws
E56-L2	220 mm Axial Grip Pliers – LL Jaws
E56-W1	195 mm Axial Grip Pliers – W Jaws
J55-112H	Hand File (Bastard) - 30 x 300 mm

GB99-E20

20 Piece 1000V Wrench Set



CODE NO	PIECES
GB99-E20	20
GB09	9 PC: 8,10,11,12,13,14,17,19,22 mm 1000V Open end Wrenches
GB14	6 PC: 10, 12, 13, 14, 17, 19 mm 1000V Ring End Wrenches
GK10	5 PC: 3, 4, 5, 6, 8 mm 1000V T-Handle Hexagon Keys

GE99-E08

8 Piece 1000V Tool Set



CODE NO	PIECES
GE99-E08	8
G10-18	180 mm 1000V Combination Pliers (VDE)
G12-18	160 mm 1000V Diagonal Cutter (VDE)
G15-18	200 mm 1000V Long Nose Pliers (VDE)
G16-18	200 mm 1000V Bent Long Nose Pliers (VDE)
G30-58-0170	170 mm 1000V RZR Series Cable Shears (VDE)
G25-58-0250	250 mm 1000V Water Pump Pliers (VDE)
G40-48-0145	Multi-Purpose Electrician's Shears - 145 mm
G50-P1	1000V Cable Knife - Straight - 215 mm

GC10-E52H2


52 Piece 3/8" + 1/2" Drive 1000V 6-Point Socket Set



CODE NO	PIECES
GC10-E52H2	52
GC12-H	16 PC: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 22 mm 1000V 3/8" Drive 6-Point Socket
GC18S-T	6 PC: (T20, T25, T27, T30, T40, T45)x65 mm 1000V 3/8" Drive TORX Socket Bit
GC18S-X	2 PC: (M8, M10)x75 mm 3/8" Drive 1000V XZN Socket Bit
GC18S-H	4 PC: (4, 5, 6, 8)x65 mm 3/8" Drive 1000V Hexagon Socket Bit
GC11-12	3/8" Drive 1000V Quick Release Reversible Ratchet
GC11-40	3/8" Drive 1000V Sliding T-Handle - 210 mm
GC11-70	2 PC: 93, 170 mm 3/8" Drive 1000V Extension Bar
GC22-H	16 PC: 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 22, 24, 27, 30, 32 mm 1/2" Drive 1000V 6-Point Socket
GC21-12	1/2" Drive 1000V Quick Release Reversible Ratchet
GC21-40	1/2" Drive 1000V Sliding T-Handle - 205 mm
GC21-70	2 PC: 140, 270 mm 1/2" Drive 1000V Extension Bar

GF99-E52

52 Piece C-PLUS 1000V Screwdriver Set



CODE NO	PIECES
GF99-E52	52
G01	5 PC: 2.5x75, 3.0x100, 4.0x100, 5.5x125, 6.5x150 mm C-PLUS 1000V Slotted Screwdrivers (VDE)
G02	3 PC: PH1x80, PH2x100, PH3x150 mm C-PLUS 1000V Phillips Screwdrivers (VDE)
G04	6 PC: T10x100, T15x100, T20x100, T25x125, T27x150, T30x150 mm C-PLUS 1000V TORX Screwdrivers (VDE)
G07	6 PC: 5.5x125, 6.0x125, 7.0x125, 8.0x125, 10x125, 13x125 mm 1000V Nut Drivers (VDE)
G26/BT	C-PLUS 1000V Bit Driver 1/4" x 100 mm
CB/ST31	31 PC: Slotted/PH/P2/TORX/Hex. Bits, BT/02 Bit Holder

JL-E53

53 Piece Tool Set



CODE NO	PIECES
JL-E53	53
J55-108H	Hand File (Bastard) - 20 x 200 mm
J56-108H	Half-Round File (Bastard) - 20 x 200 mm
J57-108H	Round File (Bastard) - Ø7.5 x 200 mm
J58-108H	Square File (Bastard) - 8 x 200 mm
J59-108H	Three Square File (Bastard) - 15 x 200 mm
J75-R06	6 PC: Needle File Set
J45CPM	C-Pro Utility Knife (Metal Body) - 18 mm
J45-R	18 mm Snap-Off Knife Blade - 10 Pieces
L01-500	Machinist's Hammer - 500 gr
L12-40-2	Soft Face Hammer - Ø40 mm
L12-R40-2	Spare Plastic Head (for L12-40-2) - Single
L25-200-2	Flat Chisel - 24x 200 mm
L29-4	Centre Punch - Ø4 x 120 mm
L31	4 PC: Ø(3, 4, 5, 6) x 150 mm Parallel Pin Punch
P05-0519	Compact Tape Measure (5 M x 19 mm)
P15-030	Stainless Steel Rule - 30 cm
P54-205	Feeler Gauge (Metric) - 20 Leaf (0,05 - 1,0 mm)
A205210	19 PC: 1, 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7, 7.5, 8, 8.5, 9, 9.5, 10 mm HSS Drill Bit Set

LR-E35


35 Piece Tool Set



CODE NO	PIECES
LR-E35	35
J45CPM	C-Pro Snap-Off Knife (Metal Body) - 18 mm
J45-R	18 mm Snap-Off Knife Blade - 10 Pieces
L01-500	Machinist's Hammer (Wooden Handle) - 500 gr
L12-40-2	Soft Face Hammer - Ø40 mm
L12-R40-2	Spare Plastic Head (for L12-40-2) - Single
L25-200-2	Flat Chisel - 200 mm
L29-4	Ø4 x 120 mm Centre Punch
L31	4 PC: Ø(3, 4, 5, 6) x 150 mm Parallel Pin Punch
N31-12	Trim Clip Removal Tool - 150 mm
P05-0519	Compact Tape Measure - 5 Mx19 mm
P15-030	Stainless Steel Rule - 30 cm
P54-205	Feeler Gauge (Metric) - 20 Leaf (0,05 - 1,0 mm)
R11-PEN	Stylus LED Flashlight - 100 Lumen
R15-1000	Magnetic Pick-Up Tool - Cap:1590 gr
R36	4 PC: Straight Pick, Angle Pick, Hook Pick, 90° Pick
R37-25	Seal Scraper (25 x 150 mm)
R40-4	Steel Wire Brush (4 Row) - 275 mm
G09-11	Car Electric Circuit Tester - 6/24V DC
B19	2 PC: (10x11, 11x13) mm Flare Nut Wrench

new

01 Tool Containers and Assortments



LPR-E17 17 Piece Tool Set



CODE NO	PIECES
LPR-E17	17
L02-16	Ball Pein Hammer - 16 Oz/450 gr
L12-40-2	Soft Face Hammer - Ø 40 mm
L12-R40-2	Spare Plastic Head (for L12-40-2) - Single
L29	3 PC: Ø3x110, Ø4x120, Ø5x150 mm Centre Punch
L31	2 PC: Ø(2, 5)x150 mm Parallel Pin Punch
P05A	Compact Tape Measure (Inch/Metric) 5M-16 FT x 19 mm
P15-030	Stainless Steel Rule - 30 cm
P45A	Vernier Caliper - 150 mm
R.P6	Lumax PRO 2AA Focus Flashlight
R15-0500	Magnetic Pick-Up Tool (Cap.: 500 gr)
R16-700	Magnetic Pick-Up and Claw Tool (Cap.: 500 gr)
R20R	Telescoping Inspection Mirror (Round)- Ø 50 -25/90cm
R35DE	Engineer's Double End Scriber -235 mm
J47SPQ	Foldable Trimming Knife (Trapezoid Blade)-19 mm

ENJ-E21 21 Piece Tool Set



CODE NO	PIECES
ENJ-E21	21
K20	6 PC: (6, 7, 8, 10, 11, 13)x125 mm T-Handle Nut Driver
E36-54	225 mm Concretors' Nippers (PVC Sleeves)
E50-2	240 mm Grip Pliers (Curved Jaws)
L01-300	Machinist's Hammer - 300 gr
L25-250G-2	28x250 mm Flat Chisel (with Hand Guard)
R40-4	275 mm Steel Wire Brush (4 Row)
R35DE	Engineer's Double End Scriber -235 mm
N31-1105	5 PC: Trim and Upholstery Removal Set
N31-12	150 mm Trim Clip Removal Tool
J04-250L	250 mm Aviation Tin Snips (Left Cut)
J04-250R	250 mm Aviation Tin Snips (Right Cut)
J81-200	10x200 mm Triangular Scraper

EJ-E07 7 Piece Tool Set



CODE NO	PIECES
EJ-E07	7
E01-41	180 mm Combination Pliers
E30-54	300 mm Water Pump Pliers (Box Joint)
E36-54	280 mm Concretors' Nippers (PVC Sleeves)
J04-250L	250 mm Aviation Tin Snips (Left Cut)
J04-250R	250 mm Aviation Tin Snips (Right Cut)
N33-04	370 mm Bodywork File Holder (Including 9 TPI File)
L20-0401	400 mm Pry Bar (File)


N30-E12 12 Piece Bodywork Tool Set



CODE NO	PIECES
N30-E12	12
N33-04	370 mm Bodywork File Holder (Including 9 TPI File)
N33-04R1D	350 mm Car Body File Blade (Diagonal Cut) - 9 TPI
N33-04R1C	350 mm Car Body File Blade (Curved Cut) - 9 TPI
J55-H	3 PC: 300 mm Hand Files (Bastard, Second, Smooth)
N33-02PW	Wedge Dolly (Flat)
N33-02TO	Toe Dolly
N33-02DE	Double End Dolly (Convex and Flat Head)
N33-02UA	Anvil Dolly
N33-02HE	Heel Dolly
N33-02PWC	Wenge Dolly (Convex)

N30-E04 4 Piece Bodywork Tool Set

new



CODE NO	PIECES
N30-E04	4
N33-03DS	Double Ended Spoon (Angled and Flat Ends)
N33-03SL	General Purpose Spoon (Chequered Face)
N33-03SS	General Purpose Spoon - Short Form
N23-0750	Tyre Lever - (500 mm : 20")

N30-E09 9 Piece Bodywork Tool Set



CODE NO	PIECES
N30-E09	9
N33-03DS	Double Ended Spoon (Angled and Flat Ends)
N33-03SL	General Purpose Spoon (Chequered Face)
N33-03SS	General Purpose Spoon - Short Form
L12-40-2	Soft Face Hammer - Ø 40 mm
N33-01BMC2/MS	Bumping Hammer (Milled Round / Flat Square Head)
N33-01BPF	Bumping Hammer (Flat Round / Ball Pein)
L16-40	Rubber Mallet - Ø60 mm
L17-40	Aluminium Hammer - Ø 40 mm
N23-0750	Tyre Lever - (500 mm : 20")

N30-E10 10 Piece Bodywork Tool Set




CODE NO	PIECES
N30-E10	10
N33-01BMC2/MS	Bumping Hammer (Milled Round / Flat Square Head)
N33-01BPF	Bumping Hammer (Flat Round / Ball Pein)
L17-40	Aluminium Hammer - Ø 40 mm
L12-30-2	Soft Face Hammer - Ø 30 mm
L12-R30-2	Spare Plastic Head (for L12-30-2) - Single
L12DB-45	Dead Blow Hammer - Ø45 mm
L01-300	Machinist's Hammer - 300 gr
N33-02TO	Toe Dolly
N33-02UA	Anvil Dolly
N33-02CW	Wedge Dolly (Curved)



175x370 mm

B99-E20

20 Piece Combination and Double Open End Wrench Set



CFS



350x370 mm

CODE NO	PIECES
B99-E20	20
B01	12 PC: 6, 7, 8, 9, 10, 11, 12, 13, 14, 17, 19, 22 mm Combination Wrenches
B09	8 PC: 6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 18x19, 20x22 mm Double Open End Wrenches (Long)

B01-E12


12 Piece Combination Wrench Set



CODE NO	PIECES
B01-E12	12
B01	12 PC: 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 19, 22 mm Combination Wrenches

B01-E16

16 Piece Combination Wrench Set



CODE NO	PIECES
B01-E16	16
B01	16 PC: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 22, 24 mm Combination Wrenches

B01A-E14

14 Piece Combination Wrench Set - SAE




CODE NO	PIECES
B01A-E14	14
B01A	14 PC: (1/4, 5/16, 11/32, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1 inch) Combination Wrenches-SAE

B05-E10

10 Piece C-GEAR Ratcheting Combination Wrench Set (Straight)

new




CODE NO	PIECES
B05-E10	10
B05	10 PC: 8, 10, 11, 12, 13, 14, 15, 16, 17, 19 mm C-GEAR Ratcheting Combination Wrenches (Straight)

B06-E10

10 Piece C-GEAR Ratcheting Combination Wrench Set (Flex Head)

new



CODE NO	PIECES
B06-E10	10
B06	10 PC: 8, 10, 11, 12, 13, 14, 15, 16, 17, 19 mm C-GEAR Ratcheting Combination Wrenches (Flex Head)

B10-E08

8 Piece Double Open End Wrench Set (Short)



CODE NO	PIECES
B10-E08	8
B10	8 PC: 6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 18x19, 20x22 mm Double Open End Wrenches (Short)

B10-E12

12 Piece Double Open End Wrench Set (Short)



CODE NO	PIECES
B10-E12	12
B10	12 PC: 6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 18x19, 20x22, 21x23, 24x26, 25x28, 30x32 mm Double Open End Wrenches (Short)

B09-E08

8 Piece Double Open End Wrench Set (Long)



CODE NO	PIECES
B09-E08	8
B09	8 PC: 6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 18x19, 20x22 mm Double Open End Wrenches (Long)

B09-E12


12 Piece Double Open End Wrench Set (Long)



CODE NO	PIECES
B09-E12	12
B09	12 PC: 6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 18x19, 20x22, 21x23, 24x26, 25x28, 30x32 mm Double Open End Wrenches (Long)

B14-E08

8 Piece Double Ring End Wrench Set



CODE NO	PIECES
B14-E08	8
B14	8 PC: 6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 18x19, 20x22 mm Double Ring End Wrenches

B17-E18

18 Piece E-TORX Ring Wrench and Socket Set



CODE NO	PIECES
B17-E18	18
B17	4 PC: E06xE08, E10xE12, E14xE18, E20xE24 E-TORX Double End Wrenches
C06	6 PC: E4, E5, E6, E7, E8, E10 1/4" Drive E-TORX Sockets
C26	8 PC: E10, E12, E14, E16, E18, E20, E22, E24 1/2" Drive E-TORX Sockets

01 Tool Containers and Assortments

B19-E06

6 Piece Flare Nut Wrench Set

new



CODE NO	PIECES
B19-E06	6

B19 6 PC: 8x10, 10x11, 11x13, 12x14, 17x19, 19x22 mm Flare Nut Wrenches

B28-E08

8 Piece Double Ended Offset Socket Wrench Set



CODE NO	PIECES
B28-E08	8

B28 8 PC: 8, 10, 11, 12, 13, 14, 17, 19 mm Double Ended Offset Socket Wrenches

K99-10-E06

6 Piece T-Handle Hex Key Set



CODE NO	PIECES
K99-10-E06	6

K10 6 PC: 2, 2.5, 3, 4, 5, 6 mm T-Handle Hexagon Keys

K99-10-E15

15 Piece T-Handle and Ballpoint L Hex Key Set




CODE NO	PIECES
K99-10-E15	15

K10 6 PC: 2, 2.5, 3, 4, 5, 6 mm T-Handle Hexagon Keys
LT/900 9 PC: 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm Ball End Hexagon L Key Set (Long Arm)

K99-10A-E06

6 Piece T-Handle Hex Key Set - SAE



CODE NO	PIECES
K99-10A-E06	6

K10A 6 PC: 3/32, 1/8, 5/32, 3/16, 7/32, 1/4 inch T-Handle Hexagon Keys

K99-10A-E15

15 Piece T-Handle and Ballpoint L Hex Key Set - SAE




CODE NO	PIECES
K99-10A-E15	15

K10A 6 PC: 3/32, 1/8, 5/32, 3/16, 7/32, 1/4 inch T-Handle Hexagon Keys
LT/900AF 9 PC: 1/16, 5/64, 3/32, 1/8, 5/32, 3/16, 1/4, 5/16, 3/8 inch Ball End Hexagon L Key Set (Long Arm)

K99-12-E06

6 Piece T-Handle TORX Key Set



CODE NO	PIECES
K99-12-E06	6

K12 6 PC: T10, T15, T20, T25, T30, T40 T-Handle TORX Keys

K99-12-E14

14 Piece T-Handle and L TORX Key Set



CODE NO	PIECES
K99-12-E14	14

K12 6 PC: T10, T15, T20, T25, T30, T40 T-Handle TORX Keys
LT/700L 8 PC: T9, T10, T15, T20, T25, T27, T30, T40 TORX L Key Set (Long Arm)

C00-E26H2

26 Piece 1/4" Drive Socket and Hex Key Set



CODE NO	PIECES
C00-E26H2	26

C02-H 12 PC: 4, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 mm 1/4" Drive 6-Point Socket
C01-12 1/4" Drive Quick Release Reversible Ratchet
C01-40 1/4" Drive Sliding T-Handle (115 mm)
C01-70 2 PC: 50, 150 mm 1/4" Drive Extension Bar
C01-80 1/4" Drive Universal Joint
LT/9 9 PC: 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm Hexagon L Key Set (Short Arm)

C00-E52H2

52 Piece 1/4" Drive Socket and Hex Key Set




CODE NO	PIECES
C00-E52H2	52

C02-H 12 PC: 4, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 mm 1/4" Drive 6-Point Sockets
C04-H 10 PC: 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13 mm 1/4" Drive 6-Point Deep Socket
C08S-T 7 PC: T10, T15, T20, T25, T27, T30, T40 1/4" Drive TORX Socket Bits
C08S-H 5 PC: 3, 4, 5, 6, 8 mm 1/4" Drive Hexagon Socket Bits
C08S-S 5.5 mm 1/4" Drive Slotted Socket Bits
C08S-PH 2 PC: PH1, PH2 1/4" Drive Phillips Socket Bits
C01-12 1/4" Drive Quick Release Reversible Ratchet
C01-20 1/4" Drive Spinner Handle (150 mm)
C01-40 1/4" Drive Sliding T-Handle (115 mm)
C01-70 2 PC: 50, 150 mm 1/4" Drive Extension Bar
C01-80 1/4" Drive Universal Joint
LT/9 9 PC: 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm Hexagon L Key Set (Short Arm)



C00A-E15BT

15 Piece 1/4" Drive Socket Set - SAE




CODE NO	PIECES
C00A-E15BT	15

- C02A-B ○ **10 PC:** 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2, 9/16 inch 1/4" Drive 12-Point Sockets - SAE
- C01-T90 1/4" Sealed Reversible Ratchet (Metal Handle)
- C01-20 1/4" Drive Spinner Handle (150 mm)
- C01-70 **2 PC:** 50, 150 mm 1/4" Drive Extension Bar
- C01-80 1/4" Drive Universal Joint

C00A-E25BT

25 Piece 1/4" Drive Socket Set - SAE




CODE NO	PIECES
C00A-E25BT	25

- C02A-B ○ **10 PC:** 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2, 9/16 inch 1/4" Drive 12-Point Sockets - SAE
- C04A-B ○ **10 PC:** 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2, 9/16 inch 1/4" Drive 12-Point Deep Sockets - SAE
- C01-T90 1/4" Sealed Reversible Ratchet (Metal Handle)
- C01-20 1/4" Drive Spinner Handle (150 mm)
- C01-70 **2 PC:** 50, 150 mm 1/4" Drive Extension Bar
- C01-80 1/4" Drive Universal Joint

C00A-E39BT

39 Piece 1/4" Drive Socket Set - SAE




CODE NO	PIECES
C00A-E39BT	39

- C02A-B ○ **10 PC:** 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2, 9/16 inch 1/4" Drive 12-Point Sockets - SAE
- C04A-B ○ **10 PC:** 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2, 9/16 inch 1/4" Drive 12-Point Deep Sockets - SAE
- C08AS-H ○ **11 PC:** 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4, 5/16 inch 1/4" Drive Hexagon Socket Bits
- C01-T90 1/4" Sealed Reversible Ratchet (Metal Handle)
- C01-20 1/4" Drive Spinner Handle (150 mm)
- C01-70 **3 PC:** 50, 100, 150 mm 1/4" Drive Extension Bar
- C01-75F 1/4" Drive Flexible Extension Bar
- C01-35MR 1/4" Drive Swivel Handle (Metal Handle)
- C01-80 1/4" Drive Universal Joint

C00C-E45BHT

45 Piece 1/4" Drive Socket Set - Metric / SAE



CODE NO	PIECES
C00C-E45BHT	45

- C02-H ○ **10 PC:** 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 mm 1/4" Drive 6-Point Socket
- C04-H ○ **10 PC:** 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 mm 1/4" Drive 6-Point Deep Socket
- C02A-B ○ **10 PC:** 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2, 9/16 inch 1/4" Drive 12-Point Sockets - SAE
- C04A-B ○ **10 PC:** 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2, 9/16 inch 1/4" Drive 12-Point Deep Sockets - SAE
- C01-T90 1/4" Drive 12-Point Deep Sockets - SAE
- C01-20 1/4" Drive Spinner Handle (150 mm)
- C01-70 **2 PC:** 50, 150 mm 1/4" Drive Extension Bar
- C01-80 1/4" Drive Universal Joint

C10-E18H2

18 Piece 3/8" Drive Socket Set



CODE NO	PIECES
C10-E18H2	18

- C12-H ○ **13 PC:** 8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22 mm 3/8" Drive 6-Point Sockets
- C11-12 3/8" Drive Quick Release Reversible Ratchet
- C11-40 3/8" Drive Sliding T-Handle (200 mm)
- C11-70 **2 PC:** 75, 150 mm 3/8" Extension Bar
- C11-80 3/8" Drive Universal Joint

C10A-E17BT

17 Piece 3/8" Drive Socket Set - SAE



CODE NO	PIECES
C10A-E17BT	17

- C12A-B ○ **13 PC:** 1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1 inch 3/8" Drive 12-Point Sockets - SAE
- C11-T90 3/8" Sealed Reversible Ratchet (Metal Handle)
- C11-70 **2 PC:** 75, 150 mm 3/8" Drive Extension Bar
- C11-80 3/8" Drive Universal Joint

C10A-E30BT

30 Piece 3/8" Drive Socket Set - SAE



CODE NO	PIECES
C10A-E30BT	30

- C12A-B ○ **13 PC:** 1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1 inch 3/8" Drive 12-Point Sockets - SAE
- C14A-B ○ **13 PC:** 1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1 inch 3/8" Drive 12-Point Deep Sockets - SAE
- C11-T90 3/8" Sealed Reversible Ratchet (Metal Handle)
- C11-70 **2 PC:** 75, 150 mm 3/8" Drive Extension Bar
- C11-80 3/8" Drive Universal Joint

C24-E13H

13 Piece 1/2" Drive Deep Socket Set




CODE NO	PIECES
C24-E13H	13

- C24-H ○ **13 PC:** 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24 mm 1/2" Drive 6-Point Deep Sockets

C28S-E14H

14 Piece 1/2" Hexagon Socket Bits Set



CODE NO	PIECES
C28S-E14H	14

- C28S-H ○ **9 PC:** (5, 6, 7, 8, 10, 12, 14, 17, 19) x 55 mm 1/2" Drive Hexagon Socket Bits - Short
- C28S-HL ○ **5 PC:** (5, 6, 8, 10, 12) x 100 mm 1/2" Drive Hexagon Socket Bits - Long

01 Tool Containers and Assortments

C99-E21

21 Piece 1/2" Drive E-TORX Socket and Socket Bits Set

new



CODE NO	PIECES
C99-E21	21

- B19-1011 Flare Nut Wrench - 10x11 mm
- BT/8003 3/8" Drive Bit Holder Socket (for 1/4" Bits)
- C16 3 PC: (E10, E12, E14) x 23 mm 3/8" Drive E-TORX Sockets
- C17-R14C 3/8" Drive 12 Point Spark Plug Socket (Retaining Clip) - 14 mm
- C18S-T40 3/8" Drive TORX Socket Bits - T40 x 48 mm
- C26-11 1/2" Drive E-TORX Sockets - E11 x 28 mm
- C28S-H 5 PC: (8, 10, 12, 14, 17) x 55 mm 1/2" Drive Hexagon Socket Bits - Short
- C28S-T 4 PC: (T45, T50, T55, T60) x 55 mm 1/2" Drive TORX Socket Bits - Short
- C28S-TR 4 PC: (T30, T40, T45, T50) x 55 mm 1/2" Drive TORX Tamper Proof Socket Bits - Short

C28S-E29

29 Piece 1/2" Drive TORX/Hex/XZN Socket Bits Set



CODE NO	PIECES
C28S-E29	29

- C28S-T 9 PC: (T20, T25, T27, T30, T40, T45, T50, T55, T60) x 55 mm 1/2" Drive TORX Socket Bits - Short
- C28S-TL 4 PC: (T30, T40, T45, T50) x 100 mm 1/2" Drive TORX Socket Bits - Long
- C28S-H 7 PC: (5, 6, 7, 8, 10, 12, 14) x 55 mm 1/2" Drive Hexagon Socket Bits - Short
- C28S-HL 4 PC: (6, 8, 10, 12 mm) x 100 mm 1/2" Drive Hexagon Socket Bits - Long
- C28S-XL 5 PC: (M6, M8, M10, M12, M14) x 100 mm 1/2" Drive XZN Socket Bits - Long

C28S-E32M

32 Piece 1/2" Drive TORX/Hex/XZN Socket Bits Set

new




CODE NO	PIECES
C28S-E32M	32

- C28S-H 7 PC: (5, 6, 7, 8, 10, 12, 14) x 55 mm 1/2" Drive Hexagon Socket Bits - Short
- C28S-T 9 PC: (T25, T27, T30, T40, T45, T50, T55, T60, T70) x 55 mm 1/2" Drive TORX Socket Bits - Short
- C68-X18 M18 1/2" Drive Impact XZN Socket Bits
- C68-H 8 PC: (6, 7, 8, 10, 12, 14, 17, 19) x 78 mm 1/2" Drive Impact Hexagon Socket Bits
- C68-T 7 PC: (T30, T40, T45, T50, T55, T60, T70) x 78 mm 1/2" Drive Impact TORX Socket Bits

C28-SSE40

40 Piece H10 TORX/Hex/XZN Bit Set



CODE NO	PIECES
C28-SSE40	40

- BT/8005 3/8" Drive Bit Holder Socket (10 mm)
- BT/8008 1/2" Drive Bit Holder Socket (10 mm)
- CB/1000 7 PC: (T20, T25, T30, T40, T45, T50, T55) x 30 mm H10 Drive Torx Bits - Short
- CB/1100G 7 PC: (T20, T25, T30, T40, T45, T50, T55) x 75 mm H10 Drive Torx Bits - Long
- CB/2000G 7 PC: (4, 5, 6, 7, 8, 10, 12) x 30 mm H10 Drive Hexagon Bits - Short
- CB/2100G 7 PC: (4, 5, 6, 7, 8, 10, 12) x 75 mm H10 Drive Hexagon Bits - Long
- CB/3000G 5 PC: (M5, M6, M8, M10, M12) x 30 mm H10 Drive XZN (Spline) Bits - Short
- CB/3100G 5 PC: (M5, M6, M8, M10, M12) x 75 mm H10 Drive XZN (Spline) Bits - Long

C20-E23H2

23 Piece 1/2" Drive Socket Set



CODE NO	PIECES
C20-E23H2	23

- C22-H 18 PC: 8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32 mm 1/2" Drive 6-Point Sockets
- C21-12 1/2" Drive Quick Release Reversible Ratchet
- C21-40 1/2" Drive Sliding T-Handle (250 mm)
- C21-70 2 PC: 125, 250 mm 1/2" Drive Extension Bar
- C21-80 1/2" Drive Universal Joint

C20A-E20BT

20 Piece 1/2" Drive Socket Set - SAE




CODE NO	PIECES
C20A-E20BT	20

- C22A-B 15 PC: 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-3/16, 1-1/4 inch 1/2" Drive 12-Point Sockets - SAE
- C21-T90 1/2" Sealed Reversible Ratchet (Metal Handle)
- C21-40 1/2" Drive Sliding T-Handle (250 mm)
- C21-70 2 PC: 125, 250 mm 1/2" Drive Extension Bar
- C21-80 1/2" Drive Universal Joint

C62-E10

10 Piece 1/2" Drive Impact Socket Set



CODE NO	PIECES
C62-E10	10

- C62-H 9 PC: 13, 15, 16, 17, 18, 19, 21, 22, 24 mm 1/2" Drive 6-Point Impact Sockets
- C61-80 1/2" Drive Impact Universal Joint

C64-E10/2

10 Piece 1/2" Impact Deep Socket Set



CODE NO	PIECES
C64-E10/2	10


- C64-H 9 PC: 13, 15, 16, 17, 18, 19, 21, 22, 24 mm 1/2" Drive 6-Point Impact Deep Sockets
- C61-80 1/2" Drive Impact Universal Joint





F99-E701

7 Piece C-PLUS Slotted/PH Screwdriver Set



CODE NO	PIECES
F99-E701	7
F10	<ul style="list-style-type: none"> 5 PC: 3x75, 4x100, 5.5x125, 6.5x 150, 8x150 mm C-PLUS Slotted Screwdrivers
F14	<ul style="list-style-type: none"> 2 PC: PH1x80, PH2x100 mm C-PLUS Phillips Screwdrivers

F99C-E601

6 Piece C-PLUS Slotted/PH Screwdriver Set (Impact)

new



CODE NO	PIECES
F99C-E601	6
F10C	<ul style="list-style-type: none"> 4 PC: 5.5x100, 6.5x125, 8.0x150, 10x175, mm C-PLUS Slotted Screwdrivers (Impact Capped)
F14C	<ul style="list-style-type: none"> 2 PC: PH2x100, PH3x150 mm C-PLUS Phillips Screwdrivers (Impact Capped)

4000M-E701

7 Piece TOREX Slotted/PH Screwdriver Set



CODE NO	PIECES
4000M-E701	7
4100M	<ul style="list-style-type: none"> 5 PC: 3x75, 4x100, 5.5x125, 6.5x 150, 8x150 mm TOREX Slotted Screwdrivers
4200M	<ul style="list-style-type: none"> 2 PC: PH1x80, PH2x100 mm TOREX Phillips Screwdrivers

F99-E3901

39 Piece C-PLUS Slotted/PH Screwdriver and Bit Set



CODE NO	PIECES
F99-E3901	39
F10	<ul style="list-style-type: none"> 4 PC: 3x75, 4x100, 5.5x125, 6.5x 150 mm C-PLUS Slotted Screwdrivers
F14	<ul style="list-style-type: none"> 2 PC: PH1x80, PH2x100 mm C-PLUS Phillips Screwdrivers
F26/BT	<ul style="list-style-type: none"> 1 C-PLUS Bit Driver - 1/4"x100 mm
CB/ST31	<ul style="list-style-type: none"> 31 PC: Slotted/PH/PZ/TORX/Hex. Bits, BT/02 Bit Holder
G09-VT30	<ul style="list-style-type: none"> 1 Voltage Tester (for 110 to 250V-VDE Approved)

F99-E3902

39 Piece C-PLUS Slotted/PZ Screwdriver and Bit Set



CODE NO	PIECES
F99-E3902	39
F10	<ul style="list-style-type: none"> 4 PC: 3x75, 4x100, 5.5x125, 6.5x 150 mm C-PLUS Slotted Screwdrivers
F17	<ul style="list-style-type: none"> 2 PC: PZ1x80, PZ2x100 mm C-PLUS Pozidriv Screwdrivers
F26/BT	<ul style="list-style-type: none"> 1 C-PLUS Bit Driver - 1/4"x100 mm
CB/ST31	<ul style="list-style-type: none"> 31 PC: Slotted/PH/PZ/TORX/Hex. Bits, BT/02 Bit Holder
G09-VT30	<ul style="list-style-type: none"> 1 Voltage Tester (for 110 to 250V-VDE Approved)

F99-E0705


7 Piece C-PLUS TORX Screwdriver Set



CODE NO	PIECES
F99-E0705	7
F18	<ul style="list-style-type: none"> 7 PC: T10x80, T15x80, T20x100, T25x100, T27x115, T30x115, T40x130 mm C-PLUS TORX Screwdrivers

F99-E0706

7 Piece C-PLUS TORX Tamper Proof Screwdriver Set



CODE NO	PIECES
F99-E0706	7
F19	<ul style="list-style-type: none"> 7 PC: T10x80, T15x80, T20x100, T25x100, T27x115, T30x115, T40x130 mm C-PLUS TORX Tamper Proof Screwdrivers

4400M-E701

7 Piece TOREX TORX Screwdriver Set



CODE NO	PIECES
4400M-E701	7
4400M	<ul style="list-style-type: none"> 7 PC: T10x80, T15x80, T20x100, T25x100, T27x115, T30x115, T40x130 mm TOREX TORX Screwdrivers

F99-E0507

5 Piece C-PLUS Nut Driver Set



CODE NO	PIECES
F99-E0507	5
F20	<ul style="list-style-type: none"> 5 PC: (6, 7, 8, 10, 13)x125 mm C-PLUS Nut Drivers

1300M-E501

5 Piece TOREX Nut Driver Set



CODE NO	PIECES
1300M-E501	5
1300M	<ul style="list-style-type: none"> 5 PC: (6, 7, 8, 10, 13)x125 mm TOREX Nut Drivers

01 Tool Containers and Assortments

CFS
175x370 mm

E99-41-E0103

3 Piece DuoTech Pliers Set (Polished Finish)



CODE NO	PIECES
E99-41-E0103	3
E01-41	180 mm Combination Pliers
E06-41	160 mm Diagonal Cutter
E15-41	160 mm Long Nose Pliers

E99-E0502

2 Piece Water Pump and Grip Pliers Set



CODE NO	PIECES
E99-E0502	2
E30-54	250 mm Water Pump Pliers (Box Joint)
E50-2	240 mm Grip Pliers (Curved Jaws)

E99-44-E0404


4 Piece Circlip Pliers Set



CODE NO	PIECES
E99-44-E0404	4
E65-44	180 mm External Circlip Pliers (Straight-with Spring)
E66-44	180 mm External Circlip Pliers (Bent-with Spiraling)
E67-44	180 mm Internal Circlip Pliers (Straight-without Spring)
E68-44	180 mm Internal Circlip Pliers (Bent-without Spring)

G99-E701

7 Piece C-PLUS 1000V Insulated Slotted/PH Screwdriver Set (VDE Approved)



CODE NO	PIECES
G99-E701	7
G01	4 PC: 3x100, 4x100, 5.5x125, 6.5x150 mm -PLUS VDE 1000V Insulated Slotted Screwdrivers
G02	2 PC: PH1x80, PH2x100 mm C-PLUS VDE 1000V Insulated Phillips Screwdrivers
G09-VT30	1 Voltage Tester (for 110 to 250V-VDE Approved)

G99-18-E0103


3 Piece DuoTech 1000V Insulated Pliers Set (VDE Approved)



CODE NO	PIECES
G99-18-E0103	3
G10-18	180 mm VDE 1000V Insulated Combination Pliers
G12-18	160 mm VDE 1000V Insulated Diagonal Cutter
G15-18	160 mm VDE 1000V Insulated Long Nose Pliers

H99-E06

6 Piece C-TRONIC Precision Pliers and Tweezer Set



CODE NO	PIECES
H99-E06	6
H30S-110SB	Electronics Diagonal Cutter (Small Bevel) - 110 mm
H31S-120SB	Electronics End Cutter - 120 mm
H33S-120	Electronics Short Needle Nose Pliers (Toothed Gripping Surface) - 120 mm
H37-120	Electronics Flat Nose Pliers - 120 mm
H43-120-SA	Blunt Shape Tweezers - Serrated (Straight) - 120 mm
H43-125B-SA	Blunt Shape Tweezers - Serrated (Bent) - 125 mm

H99-31-E0310

10 Piece C-TRONIC Precision Pliers and Screwdriver Set



CODE NO	PIECES
H99-31-E0310	10
H30S-110SB	Electronics Diagonal Cutters (Small Bevel) - 110 mm
H33S-120	Electronics Short Needle Nose Pliers (Toothed Gripping Surface) - 120 mm
H35S-140	Electronics Long Needle Nose Pliers - 140 mm
H01	4 PC: 1.5x40, 2.0x60, 2.5x80, 3.0x80 mm Electronics Slotted Screwdrivers
H02	2 PC: PH00x60, PH0x60 mm Electronics Phillips Screwdrivers
H43-120-SA	Blunt Shape Tweezers - Serrated (Straight) - 120 mm

J72-E0811

11 Piece Standard and Needle File Set



CODE NO	PIECES
J72-E0811	11
J55-108H	Hand File (Bastard) - 20 x 200 mm
J56-108H	Half-Round File (Bastard) - 20 x 200 mm
J57-108H	Round File (Bastard) - Ø7.5 x 200 mm
J58-108H	Square File (Bastard) - 8 x 200 mm
J59-108H	Three Square File (Bastard) - 15 x 200 mm
J75-R06	6 PC: Needle File Set

JP99-E06

6 Piece Measuring and Cutting Tool Set



CODE NO	PIECES
JP99-E06	6
J04-250S	Aviation Tin Snips (Straight Cut) - 250 mm
R35CT	Carbide Tipped Scriber - 145 mm
J45C	Compact Utility Knife - 18 mm
P05-0519	Compact Tape Measure (5 M x 19 mm)
P15-030	Stainless Steel Rule - 30 cm
P54-20S	Feeler Gauge (Metric) - 20 Leaf (0,05 - 1,0 mm)

L99-E02

2 Piece Hammer Set



CODE NO	PIECES
L99-E02	2
L01-500	Machinist's Hammer - 500 gr
L12-40-2	Soft Face Hammer - Ø 40 mm



175x370 mm

L99-E08

8 Piece Hammer and Chisel Set



CODE NO	PIECES
L99-E08	8

L01-500	Machinist's Hammer - 500 gr
L12-40-2	Soft Face Hammer - Ø 40 mm
L25-200-2	Flat Chisel - 24 x 200 mm
L29-4	Centre Punch - Ø4 x 120 mm
L31	4 PC: Ø(3, 4, 5, 6) x 150 mm Parallel Pin Punch

R01-E05

5 Piece Hand Riveter Set



CODE NO	PIECES
R01-E05	5

R01-STD	Hand Riveter (New generation)
BR	4x20 PC: 2.4x6, 3.2x8, 4x12, 4.8x20 mm Blind Riveters

R99-E24

24 Piece General Maintenance Set



CODE NO	PIECES
R99-E24	24

A205210	19 PC: 1, 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7, 7.5, 8, 8.5, 9, 9.5, 10 mm HSS Drill Bit Set
R11-MINI	LED Flashlight (Compact) - 70 Lumen
J45C	Compact Utility Knife - 18 mm
P05-0519	Compact Tape Measure (5 M x 19 mm)
P15-030	Stainless Steel Rule - 30 cm
P54-205	Feeler Gauge (Metric) - 20 Leaf (0,05 - 1,0 mm)

R99-E32

32 Piece Drill Bit and Impact Screwdriver Set



CODE NO	PIECES
R99-E32	32

A205210	19 PC: 1, 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7, 7.5, 8, 8.5, 9, 9.5, 10 mm Drill Bit Set
R15-1000	Magnetic Pick-Up Tool (Cap: 1000 gr) - 400 mm
F28/BT	5/16" Impact Bit Driver
CB/516SL	10 mm 5/16" Drive Slotted Bit (Impact Grade)
CB/516PH	3 PC: PH2, PH3, PH4 5/16" Drive Phillips Bits (Impact Grade)
CB/516TX	4 PC: T30, T40, T45, T50 5/16" Drive TORX Bits (Impact Grade)
CB/516HX	3 PC: 5, 6, 8 mm 5/16" Drive Hexagon Bits (Impact Grade)

N14-E11

11 Piece Oil Service Tool Set




CODE NO	PIECES
N14-E11	11

N14-0615	Oil Filter Band Wrench (65-100 mm)
N14-10	Oil Drain Plug Wrench - 285 mm (8 x 10 mm)
N14-12S	3 PC: 8, 10, 12 mm 3/8" Drive Square Oil Drain Plug Socket
N14-12H	5 PC: 8, 10, 12, 14, 17 mm 3/8" Drive Hexagon Oil Drain Plug Socket
C11-40	3/8" Drive Sliding T-Handle - 200 mm

N23-E06

6 Piece Wheel Service Tool Set



CODE NO	PIECES
N23-E06	6

C64W-H	3 PC: 17, 19, 21 mm 1/2" Drive Impact Wheel Nut Socket
N23-08TD	Digital Tyre Tread Depth Gauge - (0-25 mm)
N23-0831	Tyre Pressure Gauge (for Cars) 10 - 120 psi
N23-08VCT	Valve Core Tool - 70 mm

N43-E09

9 Piece Auto Electrician Set



CODE NO	PIECES
N43-E09	9

G09-11	Car Electric Circuit Tester - 6/24 DC (V)
G09-16	Car Electric Circuit Tester - Pro - 3/48 DC (V)
E69-YT1	Crimping Pliers for Insulated Terminals (0.5 - 6.0 mm ²)
KYK	6 SET: Cable Terminal Kit

N17-E09

9 Piece Special Automotive Socket Set



CODE NO	PIECES
N17-E09	9

N17-05	3 PC: 22x78, 22x110, 27x78 mm 1/2" Drive Diesel Injector Sockets
N18-1522S	3/8" Drive Oxygen (Lambda) Sensor Socket - 22x90 mm
N18-1522SL	1/2" Drive Offset Oxygen Sensor Socket - 22 mm
C17-R14C	3/8" Drive 14 mm 12 Point Spark Plug Socket (Retaining Clip)
C27-R	2 PC: 16, 21 mm 1/2" Drive Spark Plug Sockets (Retaining Rubber)
C21-915	1/2" Socket Adaptor - F:1/2" M:3/8"

N36-E04

4 Piece Windscreen Removal Tool Kit



CODE NO	PIECES
N36-E04	4

N36-WRT	Bonded Windscreen Removal Tool
N36-WH2	Pair of Handles for Windscreen Bond Cutting Wire
N36-CS0722	Windscreen Bond Cutting Wire - 22 meters

AE00

5 Division Idle EVA Module (for Storage of Parts)




CODE NO	PIECES
AE00	-

This module is especially useful to complete 2 drawer modules to 3 modules, can be used for storage of fasteners such as screws, nuts, washers etc.

1 Tool Containers and Assortments

JUNIOR General Purpose Tool Kit

121 Piece



121 Piece JUNIOR Tool Kit

Contents Only



121 Piece Tool Kits (in Roller Cabinets)

(A50TK-121+A01-06)

(A50TK-121+A02-06)




CODE NO **A50TK-121**

A50TK-121A01

A50TK-121A02

JUNIOR General Purpose Tool Kit

123 Piece



123 Piece JUNIOR Tool Kit

Contents Only



123 Piece JUNIOR Tool Kits (in Roller Cabinets)

(A50TK-123+A01-06)

(A50TK-123+A02-06)




CODE NO **A50TK-123**

A50TK-123A01

A50TK-123A02

JUNIOR General Purpose Tool Kit

164 Piece



164 Piece JUNIOR Tool Kit

Contents Only



164 Piece Tool Kits (in Roller Cabinets)

(A50TK-164+A01-06)

(A50TK-164+A02-06)



GT PLUS
6 DRAWER



GT
6 DRAWER


CODE NO **A50TK-164**

A50TK-164A01

A50TK-164A02

MIDI-1 General Purpose Tool Kit

232 Piece



232 Piece MIDI-1 Tool Kit

Contents Only



232 Piece MIDI-1 Tool Kits (in Roller Cabinets)

(A50TK-232/1+A01M-06)

(A50TK-232/1+A01-06)

(A50TK-232/1+A02-06)



GT MAX
6 DRAWER



GT PLUS
6 DRAWER



GT
6 DRAWER

CODE NO **A50TK-232/1**

A50TK-232/1A01M

A50TK-232/1A01

A50TK-232/1A02

1 Tool Containers and Assortments

MIDI-2 General Purpose Tool Kit

232 Piece



232 Piece MIDI-2 Tool Kit

Contents Only



CODE NO | A50TK-232/2

232 Piece MIDI-2 Tool Kits (in Roller Cabinets)

(A50TK-232/2+A01M-06)



A50TK-232/2A01M

(A50TK-232/2+A01-06)



A50TK-232/2A01

(A50TK-232/2+A02-06)



A50TK-232/2A02

MIDI-SAE General Purpose Tool Kit

230 Piece



230 Piece MIDI-SAE Tool Kit

Contents Only



CODE NO | A50TK-230

230 Piece MIDI-SAE Tool Kits (in Roller Cabinets)

(A50TK-230+A01M-06)



A50TK-230A01M

(A50TK-230+A01-06)



A50TK-230A01


(A50TK-230+A02-06)



A50TK-230A02

MAXI General Purpose Tool Kit

275 Piece

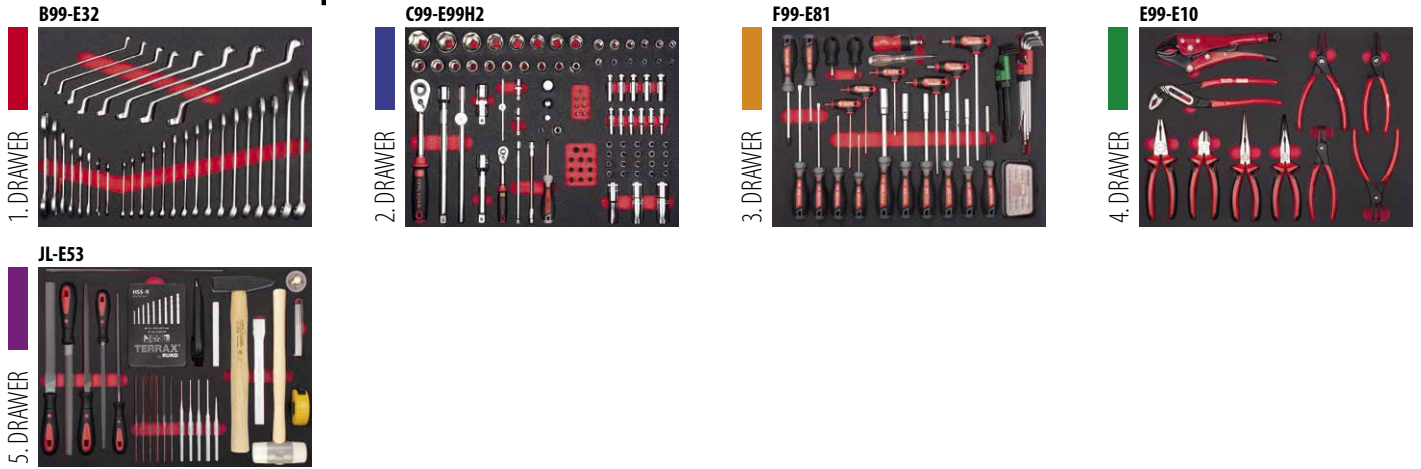

275 Piece MAXI Tool Kit

Contents Only



CODE NO **A50TK-275**

275 Piece MAXI Tool Kits (in Roller Cabinets)

(A50TK-275+A01M-07)



A50TK-275A01M


(A50TK-275+A01-07)



A50TK-275A01

SUPER MAXI General Purpose Tool Kit

343 Piece

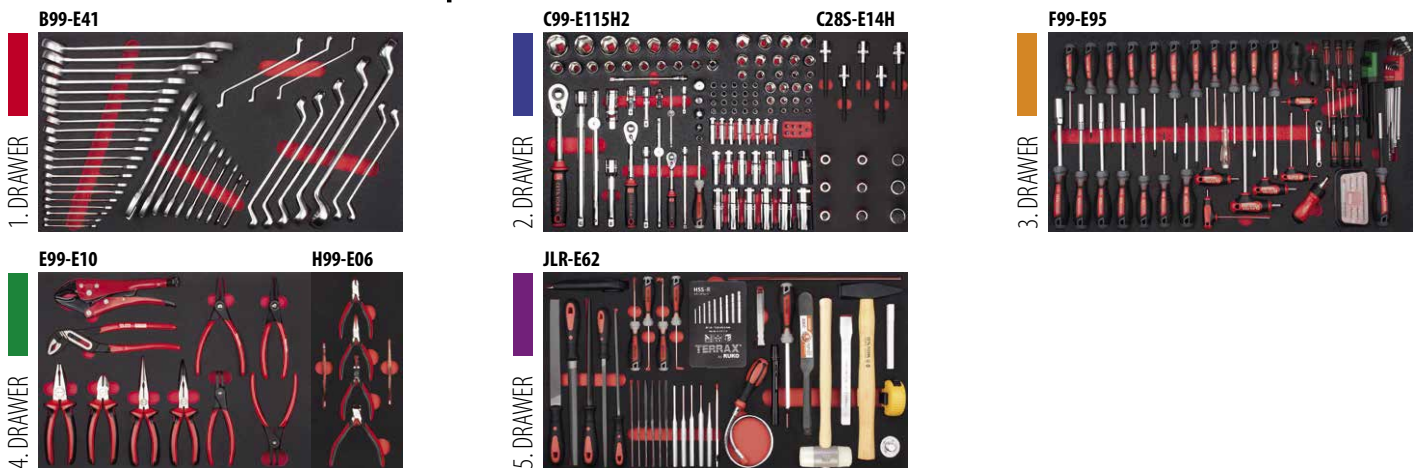

343 Piece SUPER MAXI Tool Kit

Contents Only



CODE NO **A50TK-343**

343 Piece SUPER MAXI Tool Kits (in Roller Cabinets)

(A50TK-343+A01M-07J)



A50TK-343A01M

(A50TK-343+A01-07J)



A50TK-343A01

1 Tool Containers and Assortments

AERO MIDI Aerospace Tool Kit

197 Piece



197 Piece AERO MIDI Tool Kit

Contents Only



CODE NO | A50AS-197

197 Piece AERO MIDI Tool Kits (in Roller Cabinets)

(A50AS-197+A01M-06)



A50AS-197A01M


(A50AS-197+A01-06)



A50AS-197A01

AUTO MAXI Automotive Tool Kit

293 Piece



293 Piece AUTO MAXI Tool Kit

Contents Only



CODE NO | A50CR-293

293 Piece AUTO MAXI Tool Kits (in Roller Cabinets)

(A50CR-293+A01M-07)



A50CR-293A01M




(A50CR-293+A01-07)



A50CR-293A01

AUTO SUPER MAXI Automotive Tool Kit

350 Piece

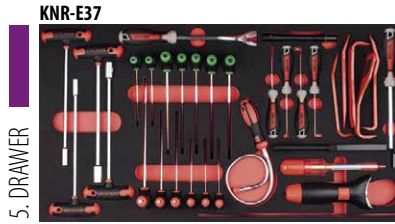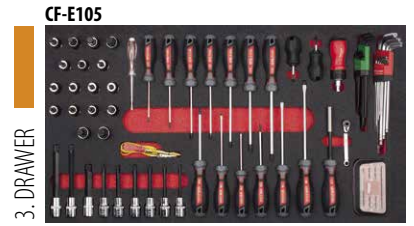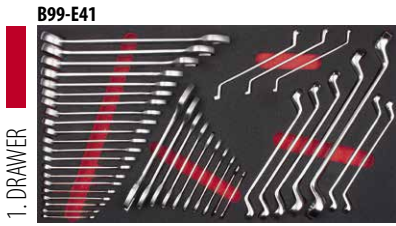

350 Piece AUTO SUPER MAXI Tool Kit

350 Piece AUTO SUPER MAXI Tool Kit (in Roller Cabinets)

Contents Only



(A50CR-350+A01M-07J)

(A50CR-350+A01-07J)




CODE NO | A50CR-350

A50CR-350A01M

A50CR-350A01

VW Automotive Tool Kit

292 Piece



292 Piece VW Tool Kit

292 Piece VW Tool Kits (in Roller Cabinets)

Contents Only



(A50VW-292+A01M-08)

(A50VW-292+A01-08)



CODE NO | A50VW-292


A50VW-292A01M

A50VW-292A01

1 Tool Containers and Assortments

MERCEDES BENZ Automotive Tool Kit

319 Piece

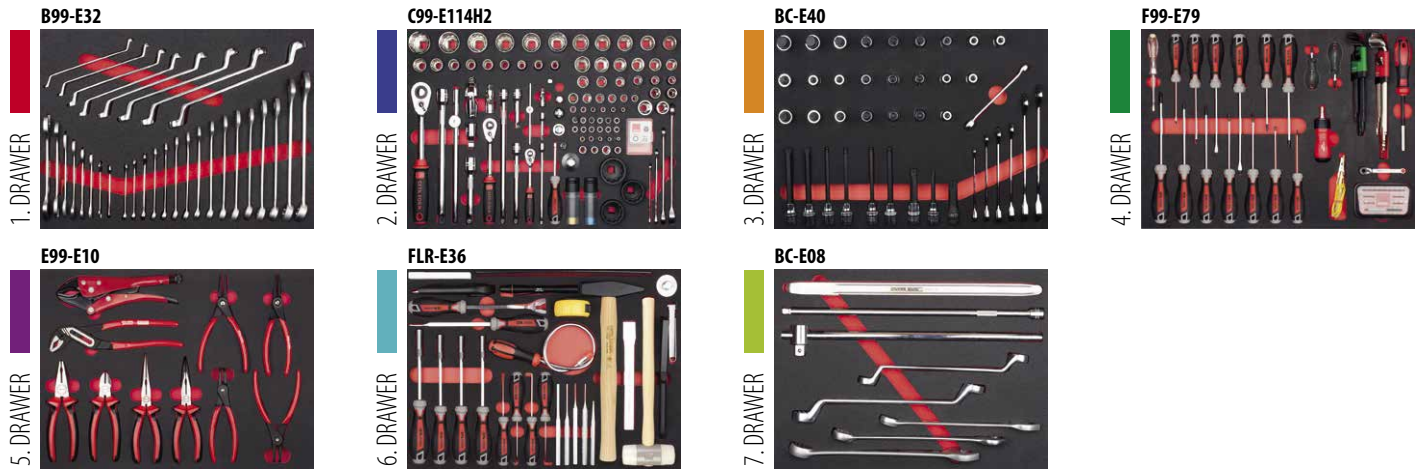

319 Piece MERCEDES BENZ Tool Kit

Contents Only



CODE NO **A50MB-319**

319 Piece MERCEDES BENZ Tool Kits (in Roller Cabinets)

(A50MB-319+A01M-08)

(A50MB-319+A01-08)




A50MB-319A01M

A50MB-319A01

BMW Automotive Tool Kit

321 Piece

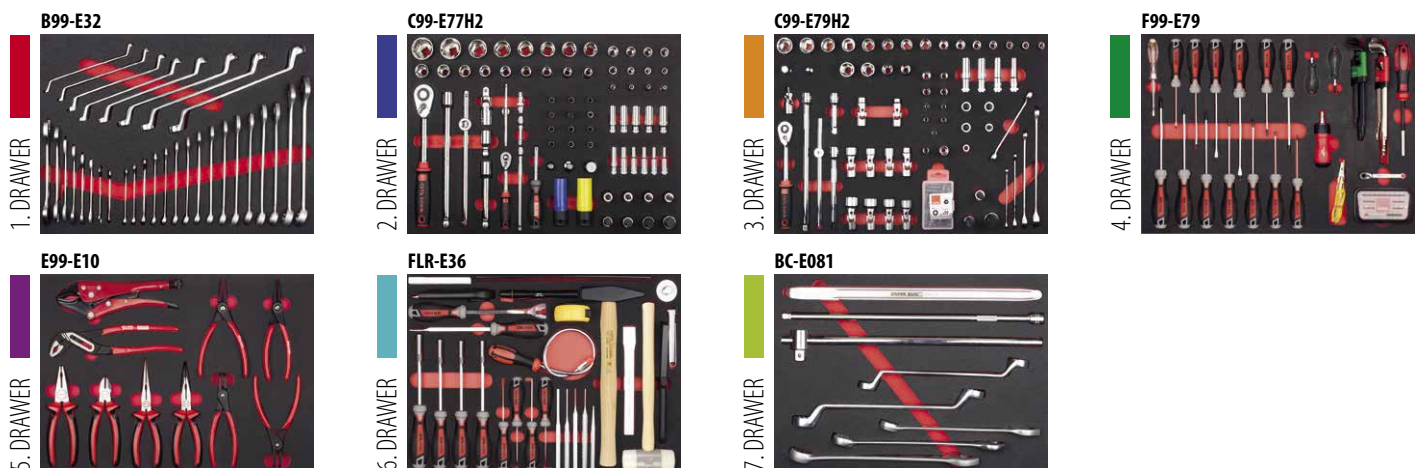

321 Piece BMW Tool Kit

Contents Only



CODE NO **A50BMW-321**

321 Piece BMW Tool Kits (in Roller Cabinets)

(A50BMW-321+A01M-08)

(A50BMW-321+A01-08)




A50BMW-321A01M

A50BMW-321A01

PSA Automotive Tool Kit

new



328 Piece

328 Piece PSA Automotive Tool Kit

Contents Only



328 Piece PSA Automotive Tool Kits (in Roller Cabinets)

(A50PSA-328+A01M-08)



(A50PSA-328+A01-08)




CODE NO | A50PSA-328

A50PSA-328A01M

A50PSA-328A01

FORD Automotive Tool Kit

new



344 Piece

344 Piece FORD Automotive Tool Kit

Contents Only



344 Piece FORD Automotive Tool Kits (in Roller Cabinets)

(A50FRD-344+A01M-08)



(A50FRD-344+A01-08FRD)



CODE NO | A50FRD-344

A50FRD-344A01M

A50FRD-344A01

1 Tool Containers and Assortments


Electric / Hybrid Cars Tool Kit

132 Piece



132 Piece Electric / Hybrid Cars Tool Kit

Contents Only



CODE NO | A50EV-132

132 Piece Electric / Hybrid Cars Tool Kits (in Roller Cabinets)

(A50EV-132+A01M-06EV)

(A50EV-132+A01-06EV)



A50EV-132A01M





A50EV-132A01

Heavy Duty Mechanical Tool Kit

new

358 Piece

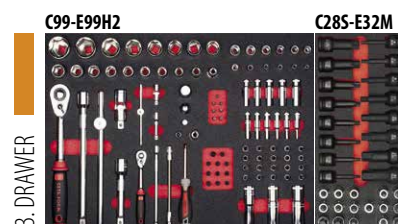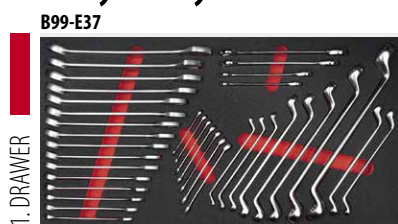

358 Piece Heavy Duty Mechanical Tool Kit

Contents Only



CODE NO | A50HCV-358

358 Piece Heavy Duty Mechanical Tool Kit (in Roller Cabinets)

(A50HCV-358+A01M-08J)

(A50HCV-358+A01-08J)



A50HCV-358A01M



A50HCV-358A01

BODY REPAIR - ALUMINUM Automotive Tool Kit

83 Piece



83 Piece Aluminum Automotive Tool Kit

83 Piece Aluminum Automotive Tool Kits (in Roller Cabinets)

Contents Only



(A50BR-83+A01M-08)

(A50BR-83+A01-08)




CODE NO **A50BR-83**

A50BR-83A01M

A50BR-83A01

BODY REPAIR Automotive Tool Kit

153 Piece

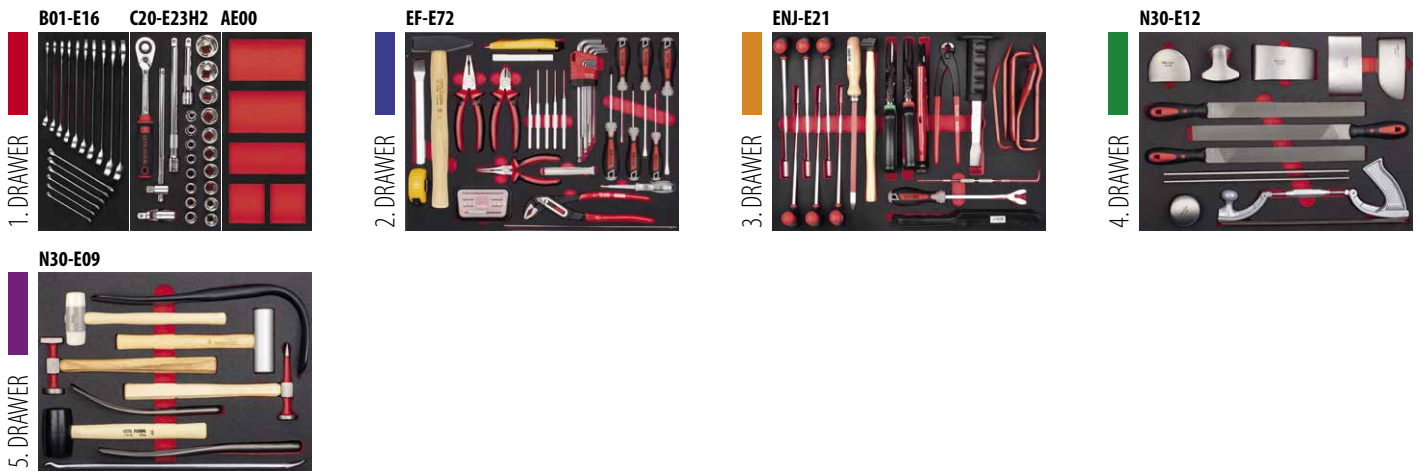

153 Piece Automotive Tool Kit

153 Piece Automotive Tool Kits (in Roller Cabinets)

Contents Only



(A50BR-153+A01M-07)

(A50BR-153+A01-07)



CODE NO **A50BR-153**

A50BR-153A01M


A50BR-153A01

1 Tool Containers and Assortments

Motorcycle Mechanical Tool Kit

new

291 Piece



291 Piece Motorcycle Mechanical Tool Kit

Contents Only



CODE NO | **A50MC-291**

291 Piece Motorcycle Mechanical Tool Kits (in Roller Cabinets)

(A50MC-291+A01M-08)



GT MAX
8 DRAWER

A50MC-291A01M

(A50MC-291+A01-08)



GT PLUS
8 DRAWER

A50MC-291A01



2 Wrenches and Hex Keys

50 | 62



B01 Series

Combination Wrenches

DIN 3113, TS ISO 7738



CODE NO	mm	mm	
B01-05/2	5.5	100	12
B01-06	6	100	12
B01-07	7	110	12
B01-08	8	120	12
B01-09	9	130	12
B01-10	10	140	12
B01-11	11	150	12
B01-12	12	160	12
B01-13	13	170	12
B01-14	14	180	12
B01-15	15	190	12
B01-16	16	200	12
B01-17	17	210	12
B01-18	18	220	12
B01-19	19	230	12
B01-20	20	240	12
B01-21	21	250	12
B01-22	22	260	12
B01-23	23	270	6
B01-24	24	280	6
B01-25	25	290	6
B01-26	26	300	6
B01-27	27	310	6
B01-28	28	320	6
B01-30	30	330	6
B01-32	32	360	6
B01-34	34	385	6
B01-36	36	400	3
B01-38	38	400	3
B01-41	41	440	3
B01-46	46	490	1
B01-50	50	530	1



For display carded delivery = Item code + X
Not available for sizes bigger than 32 mm

B01-R Series

Combination Wrench Sets (in Roll Pouch)



CODE NO	
B01-R12	1
12 PC: 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 19, 22 mm	
B01-R13	1
13 PC: 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 19, 21, 24 mm	
B01-R21	1
21 PC: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32 mm	

B01-B Series

Combination Wrench Sets (in Carton Box)



CODE NO	
B01-B08	1
8 PC: 8, 10, 11, 12, 13, 14, 17, 19 mm	
B01-B12	1
12 PC: 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 19, 22 mm	
B01-B12/2	1
12 PC: 6, 7, 8, 9, 10, 11, 12, 13, 14, 17, 19, 22 mm	
B01-B17	1
17 PC: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22 mm	
B01-B21	1
21 PC: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32 mm	
B01-B25	1
25 PC: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 30, 32 mm	

B01-P12

12 Piece Combination Wrench Set (in Plastic Holder)



CODE NO	
B01-P12	1
12 PC: 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 19, 22 mm	

B01AS Series

Combination Wrenches (Short) - SAE



CODE NO	mm	mm	
B01AS-00108	1/8	77	6
B01AS-00532	5/32	77	6
B01AS-00316	3/16	82	6
B01AS-00732	7/32	82	6

B01A Series

Combination Wrenches - SAE



CODE NO	Hex"	mm	Icon
B01A-00732	7/32	100	6
B01A-00104	1/4	100	6
B01A-00932	9/32	110	6
B01A-00516	5/16	120	6
B01A-01132	11/32	130	6
B01A-00308	3/8	140	6
B01A-00716	7/16	150	6
B01A-00102	1/2	170	6
B01A-00916	9/16	180	6
B01A-00508	5/8	200	6
B01A-01116	11/16	210	6
B01A-00304	3/4	230	6
B01A-01316	13/16	250	6
B01A-00708	7/8	260	6
B01A-01516	15/16	280	6
B01A-10000	1	290	6
B01A-10116	1 - 1/16	310	6
B01A-10108	1 - 1/8	320	6
B01A-10316	1 - 3/16	330	6
B01A-10104	1 - 1/4	360	6
B01A-10308	1 - 3/8	385	6
B01A-10102	1 - 1/2	400	6

For display carded delivery = Item code + X
Not available for sizes bigger than 1-1/2

B05 Series

C-GEAR Ratcheting Combination Wrenches (Straight)



CODE NO	Hex mm	mm	Icon
B05-08	8	140	6
B05-09	9	150	6
B05-10	10	160	6
B05-11	11	165	6
B05-12	12	170	6
B05-13	13	180	6
B05-14	14	190	6
B05-15	15	200	6
B05-16	16	210	6
B05-17	17	225	6
B05-18	18	235	6
B05-19	19	245	6
B05-21	21	290	6
B05-22	22	290	6
B05-24	24	320	6
B05-27	27	360	3
B05-30	30	410	3
B05-32	32	410	3
B05-36	36	480	2

For display carded delivery = Item code + X
Not available for sizes bigger than 24 mm

B05-R Series

C-GEAR Ratcheting Combination Wrench Sets (Straight)



CODE NO	Icon
B05-R05	1
5 PC: 8, 10, 13, 17, 19 mm	
B05-R10	1
10 PC: 8, 10, 11, 12, 13, 14, 15, 16, 17, 19 mm	
B05-R12	1
12 PC: 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm	

B01A-R Series

Combination Wrench Sets (in Roll Pouch)



CODE NO	Icon
B01A-R09	1
9 PC: 1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4 inch	
B01A-R14	1
14 PC: 1/4, 5/16, 11/32, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1 inch	
B01A-R16	1
16 PC: 1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-1/4 inch	

B05-P12

12 Piece C-GEAR Ratcheting Combination Wrench Set



CODE NO	Icon
B05-P12	1
B05 8, 10, 11, 12, 13, 14, 17, 19 mm	
B05-14B 1/4"-10 mm	
B05-38S 3/8"-13 mm	
B05-12S 1/2"-19 mm	

B05R Series

C-GEAR Ratcheting Combination Wrenches (Quick Jaw/Reversible)



CODE NO	Hex mm	mm	Icon
B05R-09	9	160	6
B05R-11	11	165	6
B05R-12	12	175	6
B05R-14	14	190	6
B05R-15	15	200	6
B05R-16	16	205	6
B05R-18	18	235	6

B07-B01

4-in-1 C-GEAR Ratcheting Combination Wrench (Reversible)



CODE NO	Hex mm	Icon
B07-B01	10x13 - 19x17	6

B06 Series

C-GEAR Ratcheting Combination Wrenches (Flex Head)



CODE NO	Hex mm	mm	Icon
B06-08	8	145	6
B06-09	9	150	6
B06-10	10	160	6
B06-11	11	165	6
B06-12	12	170	6
B06-13	13	185	6
B06-14	14	195	6
B06-15	15	200	6
B06-16	16	215	6
B06-17	17	225	6
B06-18	18	235	6
B06-19	19	250	6

For display carded delivery = Item code + X

B06-R Series

Ratcheting Combination Wrench Sets (Flex Head)



CODE NO	Icon
B06-R05	1
5 PC: 8, 10, 13, 17, 19 mm	
B06-R10	1
10 PC: 8, 10, 11, 12, 13, 14, 15, 16, 17, 19 mm	
B06-R12	1
12 PC: 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm	

2 Wrenches and Hex Keys

B05-S Series

C-GEAR Socket Adaptors



CODE NO	"	mm	mm	mm
B05-14S	1/4	10	12	12
B05-38S	3/8	13	6	6
B05-12S	1/2	19	6	6

B05-14B

C-GEAR Bit Adaptor



CODE NO	"	mm	mm	mm
B05-14B	1/4	10	6	6

B05-S04

4 Piece C-GEAR Adaptor Set



CODE NO	mm	mm	mm
B05-S04	10	6	6

4 PC: B05-14S, B05-38S, B05-12S, B05-14B

B05AR Series

C-GEAR Ratcheting Combination Wrenches (Reversible)- SAE



CODE NO	"	mm	mm	mm
B05AR-0732	7/32	140	6	6
B05AR-0104	1/4	140	6	6
B05AR-0932	9/32	140	6	6
B05AR-0516	5/16	140	6	6
B05AR-1132	11/32	150	6	6
B05AR-0308	3/8	160	6	6
B05AR-0716	7/16	165	6	6
B05AR-0102	1/2	180	6	6
B05AR-0916	9/16	190	6	6
B05AR-0508	5/8	210	6	6
B05AR-1116	11/16	225	6	6
B05AR-0304	3/4	245	6	6

B07A Series

Ratcheting Ring Wrenches (Straight) - SAE



CODE NO	"	mm	mm	mm
B07A-0102	1/4x5/16	116	6	6
B07A-0203	5/16x11/32	136	6	6
B07A-0304	3/8x7/16	144	6	6
B07A-0506	1/2x9/16	177	6	6

B07A-B04

4 Piece Ratcheting Ring Wrench Set (Straight) - SAE



CODE NO	mm	mm	mm
B07A-B04	1	6	6

4 PC: 1/4x5/16, 5/16x11/32, 3/8x7/16, 1/2x9/16 inch

B07AO Series

Ratcheting Ring Wrenches (Offset) - SAE



CODE NO	"	mm	mm	mm
B07AO-0102	1/4 x5/16	112	6	6
B07AO-0203	5/16 x 11/32	130	6	6
B07AO-0304	3/8 x 7/16	138	6	6
B07AO-0506	1/2 x 9/16	172	6	6

B07AO-B04

4 Piece Ratcheting Ring Wrench Set (Offset) - SAE



CODE NO	mm	mm	mm
B07AO-B04	1	6	6

4 PC: 1/4x5/16, 5/16x11/32, 3/8x7/16, 1/2x9/16 inch

B09 Series

Double Open End Wrenches - Long

DIN 3110, ISO 10102



CODE NO	mm	mm	mm
B09-0555	5x5.5	120	12
B09-0607	6x7	120	12
B09-0809	8x9	140	12
B09-0810	8x10	145	12
B09-1011	10x11	150	12
B09-1013	10x13	170	12
B09-1213	12x13	170	12
B09-1317	13x17	200	12
B09-1415	14x15	185	12
B09-1617	16x17	200	12
B09-1719	17x19	210	12
B09-1819	18x19	220	12
B09-1922	19x22	230	12
B09-2022	20x22	235	12
B09-2123	21x23	245	6
B09-2224	22x24	250	6
B09-2426	24x26	265	6
B09-2427	24x27	265	6
B09-2528	25x28	275	6
B09-2732	27x32	300	6
B09-3032	30x32	300	6
B09-3236	32x36	325	6
B09-3336	33x36	300	6
B09-3641	36x41	360	3
B09-4146	41x46	400	1
B09-4650	46x50	450	1



For display carded delivery = Item code + X
Not available for sizes bigger than 30x32 mm

B09-R Series

Double Open End Wrench Sets- Long - (in Roll Pouch)



CODE NO	mm	mm	mm
B09-R08	1	6	6

8 PC: 6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 18x19, 20x22 mm

CODE NO	mm	mm	mm
B09-R12	1	6	6

12 PC: 6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 18x19, 20x22, 21x23, 24x26, 25x28, 30x32 mm

B09-B Series

Double Open End Wrench Sets - Long (in Carton Box)



CODE NO		
B09-B06	1	
6 PC: 6x7, 8x9, 10x11, 12x13, 14x15, 16x17 mm		
B09-B08	1	
8 PC: 6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 18x19, 20x22 mm		
B09-B10	1	
10 PC: 6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 18x19, 20x22, 21x23, 24x26 mm		
B09-B10/2	1	
10 PC: 6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 18x19, 20x22, 24x27, 30x32 mm		
B09-B12	1	
12 PC: 6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 18x19, 20x22, 21x23, 24x26, 25x28, 30x32 mm		

B09-P12

12 Piece Double Open End Wrench Set - Long (in Plastic Holder)



CODE NO		
B09-P12	1	
12 PC: 6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 18x19, 20x22, 21x23, 24x26, 25x28, 30x32 mm		

B10 Series

Double Open End Wrenches - Short

DIN 895, TS 81



CODE NO			
B10-0607	6x 7	97	12
B10-0809	8x 9	108	12
B10-1011	10x11	120	12
B10-1013	10x13	120	12
B10-1213	12x13	133	12
B10-1415	14x15	147	12
B10-1317	13x17	162	12
B10-1617	16x17	162	12
B10-1719	17x19	178	12
B10-1819	18x19	178	12
B10-1922	19x22	195	12
B10-2022	20x22	195	12
B10-2123	21x23	213	6
B10-2224	22x24	213	6
B10-2426	24x26	232	6
B10-2427	24x27	232	6
B10-2528	25x28	250	6
B10-2732	27x32	260	6
B10-3032	30x32	260	6



For display carded delivery = Item code + X

6

B10-R Series

Double Open End Wrench Sets - Short (in Roll Pouch)



CODE NO		
B10-R08	1	
8 PC: 6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 18x19, 20x22 mm		
B10-R12	1	
12 PC: 6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 18x19, 20x22, 21x23, 24x26, 25x28, 30x32 mm		

B10-B Series

Double Open End Wrench Sets - Short (in Carton Box)



CODE NO		
B10-B06	1	
6 PC: 6x7, 8x9, 10x11, 12x13, 14x15, 16x17 mm		
B10-B08	1	
8 PC: 6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 18x19, 20x22 mm		
B10-B10	1	
10 PC: 6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 18x19, 20x22, 21x23, 24x26 mm		
B10-B10/2	1	
10 PC: 6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 18x19, 20x22, 24x27, 30x32 mm		
B10-B12	1	
12 PC: 6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 18x19, 20x22, 21x23, 24x26, 25x28, 30x32 mm		

B10-P12

12 Piece Double Open End Wrench Set - Short (in Plastic Holder)



CODE NO		
B10-P12	1	
12 PC: 6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 18x19, 20x22, 21x23, 24x26, 25x28, 30x32 mm		

B09A Series

Double Open End Wrenches - SAE



CODE NO			
B09A-0102	1/4x5/16	123	6
B09A-0203	5/16x3/8	142	6
B09A-0304	3/8x7/16	158	6
B09A-0405	7/16x1/2	171	6
B09A-0506	1/2x9/16	175	6
B09A-0607	9/16x5/8	187	6
B09A-0708	5/8x11/16	201	6
B09A-0709	5/8x3/4	201	6
B09A-0809	11/16x3/4	220	6
B09A-0911	3/4x7/8	237	6
B09A-1011	13/16x7/8	238	6
B09A-1213	15/16x1	265	6
B09A-1315	1x1-1/8	279	6
B09A-1415	1-1/16x1-1/8	300	6
B09A-1417	1-1/16x1-1/4	300	6

B09A-R10

10 Piece Double Open End Wrench Set - SAE



CODE NO		
B09A-R10	1	
10 PC: 1/4x5/16, 5/16x3/8, 7/16x1/2, 1/2x9/16, 9/16x5/8, 5/8x3/4, 11/16x3/4, 13/16x7/8, 15/16x1, 1-1/16x1-1/8 inch		

B09SA Series

Short Angle Open End Wrenches - SAE



CODE NO			
B09SA-0732	7/32	75	6
B09SA-1564	15/64	80	6
B09SA-0104	1/4	80	6
B09SA-0932	9/32	80	6
B09SA-0516	5/16	90	6
B09SA-1132	11/32	90	6
B09SA-0308	3/8	100	6
B09SA-0716	7/16	100	6
B09SA-0102	1/2	120	6
B09SA-0916	9/16	120	6

B09SA-R09

9 Piece Short Angle Open End Wrench Set - SAE



CODE NO		
B09SA-R09	1	
9 PC: 7/32, 15/64, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2 inch		

2 Wrenches and Hex Keys

B14 Series

Double Ring End Wrenches

DIN 838, TS ISO 10104



CODE NO	mm	mm	
B14-0607	6x7	175	12
B14-0809	8x9	190	12
B14-1011	10x11	210	12
B14-1213	12x13	230	12
B14-1415	14x15	250	12
B14-1617	16x17	275	12
B14-1819	18x19	300	12
B14-2022	20x22	335	12
B14-2123	21x23	340	6
B14-2426	24x26	345	6
B14-2427	24x27	345	6
B14-2528	25x28	360	6
B14-3032	30x32	370	6

B14-R Series

Double Ring End Wrench Sets (in Roll Pouch)



CODE NO	
B14-R08	1
8 PC: 6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 18x19, 20x22 mm	
B14-R12	1
12 PC: 6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 18x19, 20x22, 21x23, 24x26, 25x28, 30x32 mm	

B14-B Series

Double Ring End Wrench Sets (in Carton Box)




CODE NO	
B14-B06	1
6 PC: 6x7, 8x9, 10x11, 12x13, 14x15, 16x17 mm	
B14-B08	1
8 PC: 6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 18x19, 20x22 mm	
B14-B10/2	1
10 PC: 6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 18x19, 20x22, 24x27, 30x32 mm	
B14-B12	1
12 PC: 6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 18x19, 20x22, 21x23, 24x26, 25x28, 30x32 mm	

B17 Series

E-TORX Ring Wrenches



CODE NO	mm	mm	
B17-0608	E06xE08	110	6
B17-1012	E10xE12	140	6
B17-1418	E14xE18	180	6
B17-2024	E20xE24	225	6
 For display carded delivery = Item code + X			6

B17-B04

4 Piece E-TORX Ring Wrench Set




CODE NO	
B17-B04	1
4 PC: E6xE8, E10xE12, E14xE18, E20xE24	

B19 Series

Flare Nut Wrenches

DIN 3118, TS 3794-6



CODE NO	mm	mm	
B19-0810	8x10	141	6
B19-0911	9x11	151	6
B19-1011	10x11	161	6
B19-1113	11x13	175	6
B19-1214	12x14	175	6
B19-1719	17x19	210	6
B19-1922	19x22	230	6
B19-2427	24x27	295	6
 For display carded delivery = Item code + X			6

B19-B06

6 Piece Flare Nut Wrench Set



CODE NO	
B19-B06	1
6 PC: 8x10, 10x11, 11x13, 12x14, 17x19, 19x22 mm	

B20 Series

Half Moon Ring Wrenches

ISO 3118



CODE NO	mm	mm	
B20-1012	10x12	143	6
B20-1113	11x13	143	6
B20-1315	13x15	166	6
B20-1317	13x17	183	6
B20-1417	14x17	183	6
B20-1922	19x22	235	6



B21-B Series

Adjustable Wrenches (Phosphated-PVC Grip)

DIN 3117, TS ISO 6787



CODE NO	mm "	mm	
B21-150B	150 - 6"	20	6
B21-200B	200 - 8"	25	6
B21-250B	250 - 10"	30	6
B21-300B	300 - 12"	35	6
B21-375B	375 - 15"	45	2

B23 Series

Open End Slogging Wrenches

DIN 133, TS 81



CODE NO	mm	mm	
B23-24	24	170	1
B23-27	27	180	1
B23-30	30	190	1
B23-32	32	190	1
B23-36	36	210	1
B23-41	41	230	1
B23-46	46	250	1
B23-50	50	275	1
B23-55	55	305	1
B23-60	60	315	1
B23-65	65	335	1
B23-70	70	370	1
B23-75	75	395	1
B23-80	80	400	1

B24 Series

Ring End Slogging Wrenches

DIN 7444, TS 3794



CODE NO	mm	mm	
B24-24	24	165	1
B24-27	27	185	1
B24-30	30	185	1
B24-32	32	185	1
B24-36	36	205	1
B24-41	41	225	1
B24-46	46	235	1
B24-50	50	250	1
B24-55	55	265	1
B24-60	60	275	1
B24-65	65	305	1
B24-70	70	335	1
B24-75	75	335	1
B24-80	80	360	1

B21-C Series

Adjustable Wrenches (Chromed-PVC Grip)

DIN 3117, TS ISO 6787



CODE NO	mm "	mm	
B21-150C	150 - 6"	20	6
B21-200C	200 - 8"	25	6
B21-250C	250 - 10"	30	6
B21-300C	300 - 12"	35	6
B21-375C	375 - 15"	45	2

B27T Series

Double Ended Box Wrenches (Tubular)

DIN 896-B TS 3793-3



CODE NO	mm	mm	
B27T-0607	6x 7	100	20
B27T-0809	8x 9	100	20
B27T-1011	10x11	115	20
B27T-1213	12x13	135	10
B27T-1415	14x15	135	10
B27T-1617	16x17	145	10
B27T-1819	18x19	150	5
B27T-2022	20x22	160	5
B27T-2123	21x23	160	5
B27T-2426	24x26	175	5
B27T-2528	25x28	190	5
B27T-3032	30x32	190	5

B27T-B Series

Double Ended Box Wrench Sets (Tubular)



CODE NO	
B27T-B08	1
8 PC: 6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 18x19, 20x22 mm	
B27T-B12	1
12 PC: 6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 18x19, 20x22, 21x23, 24x26, 25x28, 30x32 mm	

B21W Series

Adjustable Wrenches (Wide Opening Jaws)

DIN 3117, ISO 6787



CODE NO	mm "	mm	
B21W-150B	150 - 6"	33	6
B21W-200B	200 - 8"	37	6
B21W-250B	250 - 10"	50	6
B21W-300B	300 - 12"	58	4

B27T-B Series

Tommy Bars (for B27T Series)



B27T-B Series



B27T-B

CODE NO	mm	mm	
B27T-12B	16 - 22	250	6
B27-1B	6 - 32	250	6
B27T-2B	18 - 32	210	6

B27 Series

Double Ended Box Wrenches (Forged)



CODE NO	mm	mm	
B27-2022	20x22	175	6
B27-2123	21x23	185	6
B27-2224	22x24	185	6
B27-2426	24x26	190	6
B27-2427	24x27	190	6
B27-2528	25x28	205	6
B27-3032	30x32	210	6

2 Wrenches and Hex Keys

B28 Series

Double Ended Offset Socket Wrenches

TS ISO 2236



CODE NO	mm	mm	mm	
B28-06	6	6	110	6
B28-07	7	7	110	6
B28-08	8	8	115	6
B28-09	9	9	115	6
B28-10	10	10	130	6
B28-11	11	11	140	6
B28-12	12	12	150	6
B28-13	13	13	155	6
B28-14	14	14	165	6
B28-15	15	15	170	6
B28-16	16	16	180	6
B28-17	17	17	190	6
B28-18	18	18	200	6
B28-19	19	19	210	6
B28-22	22	22	230	6

B28-B08

8 Piece Double Ended Offset Socket Wrench Set




CODE NO	
B28-B08	1

8 PC: 8, 10, 11, 12, 13, 14, 17, 19 mm

B32 Series

T-Handle Swivel Socket Wrenches

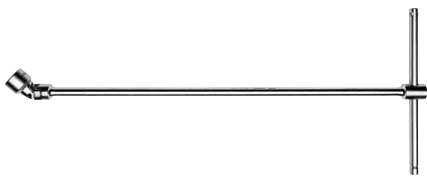

CODE NO	mm	mm	
B32-06	6	396	6
B32-07	7	396	6
B32-08	8	396	6
B32-09	9	395	6
B32-10	10	395	6
B32-11	11	395	6
B32-12	12	395	6
B32-13	13	500	6
B32-14	14	500	6
B32-15	15	500	6
B32-16	16	500	6
B32-17	17	500	6
B32-18	18	500	6
B32-19	19	500	6

K20 Series

T-Handle Nut Drivers

new design



CODE NO	mm	mm	mm	
K20-06	6	25	230	6
K20-07	7	25	230	6
K20-08	8	25	230	6
K20-09	9	25	230	6
K20-10	10	25	230	6
K20-11	11	25	230	6
K20-12	12	25	230	6
K20-13	13	25	230	6

K20-B06

6 Piece T-Handle Nut Driver Set

new design



CODE NO	
K20-B06	1

6 PC: 6, 7, 8, 10, 12, 13 mm

K20-L Series

T-Handle Nut Drivers (Long Shaft)

new design



CODE NO	mm	mm	mm	
K20-08L	8	25	350	6
K20-10L	10	25	350	6
K20-13L	13	25	350	6

B30 Series

Double Swivel End Socket Wrenches



CODE NO	mm	mm	
B30-0810	8x10	185	6
B30-1011	10x11	200	6
B30-1213	12x13	220	6
B30-1415	14x15	242	6
B30-1617	16x17	255	6
B30-1819	18x19	275	6

L Series / mm

Hexagon L Keys (Short Arm)

DIN / TS ISO 2936



1.3-12 mm: Matt chrome finish

0.7, 0.9, 13-32 mm: Phosphate finish

CODE NO	mm	mm	mm	
L/0028	0.7	0.028	35	12•
L/0035	0.9	0.035	35	12•
L/1.3	1.3	-	41	12•
L/1.5	1.5	-	45	12•
L/2	2	-	51	12•
L/2.5	2.5	-	58	12•
L/3	3	-	65	12•
L/3.5	3.5	-	69	12•
L/4	4	-	73	12•
L/4.5	4.5	-	77	12•
L/5	5	-	83	12•
L/6	6	-	95	12•
L/7	7	-	99	12•
L/8	8	-	106	12•
L/9	9	-	111	12•
L/10	10	-	121	12•
L/11	11	-	125	12•
L/12	12	-	134	12•
L/13	13	-	145	12
L/14	14	-	154	12
L/16	16	-	166	12
L/17	17	-	175	6
L/19	19	-	198	3
L/22	22	-	220	3
L/24	24	-	248	3
L/27	27	-	277	1
L/32	32	-	345	1
				6



For display carded delivery = Item code + X
Available for sizes between 1.3 - 10 mm

LT/9

9 Piece Hexagon L Key Set (Short Arm)



CODE NO	
LT/9	6

9 PC: 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm

LT/9D

LT/9 Hexagon L Key Set Display Pack




CODE NO	
LT/9D	1

12x LT/9

LT/7

7 Piece Hexagon L Key Set (Short Arm)

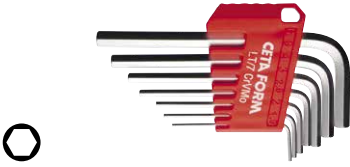



CODE NO		
LT/7		6
7 PC: 1.5, 2, 2.5, 3, 4, 5, 6 mm		

LT12/800

12 Piece Hexagon L Key Set (Long Arm)





CODE NO		
LT12/800		6
12 PC: 1.5, 2, 2.5, 3, 3.5, 4, 5, 6, 7, 8, 10, 12 mm		

LT/12

12 Piece Hexagon L Key Set (Short Arm)





CODE NO		
LT/12		6
12 PC: 1.5, 2, 2.5, 3, 3.5, 4, 5, 6, 7, 8, 10, 12 mm		

LT/12D

LT/12 Hexagon L Key Set Display Pack



CODE NO		
LT/12D		1
12x LT/12		





800 Series

Hexagon L Keys (Long Arm)

DIN / TS ISO 2936





14, 17, 19 mm: Phosphate finish

CODE NO			
815	1.5	90	12•
802	2	100	12•
825	2.5	112	12•
803	3	127	12•
835	3.5	138	12•
804	4	142	12•
805	5	163	12•
806	6	183	12•
807	7	193	12•
808	8	204	12•
810	10	230	12•
812	12	260	12•
814	14	294	12•
817	17	337	6•
819	19	362	6•
	For display carded delivery = Item code + X		6
Available for sizes between 1.5 - 10 mm			

LT7/800

7 Piece Hexagon L Key Set (Long Arm)





CODE NO		
LT7/800		6
7 PC: 1.5, 2, 2.5, 3, 4, 5, 6 mm		

LT/800

9 Piece Hexagon L Key Set (Long Arm)



CODE NO		
LT/800		6
9 PC: 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm		

LT/800D

LT/800 Hexagon L Key Set Display Pack







CODE NO		
LT/800D		1
12x LT/800		

900 Series

Ball End Hexagon L Keys (Long Arm)




Ball end allows up to 25° entry

CODE NO			
915	1.5	90	12•
902	2	100	12•
925	2.5	112	12•
903	3	127	12•
935	3.5	138	12•
904	4	142	12•
905	5	163	12•
906	6	183	12•
907	7	193	12•
908	8	204	12•
910	10	230	12•
912	12	260	12•
	For display carded delivery = Item code + X		6
Available for sizes between 1.5 - 10 mm			

LT7/900

7 Piece Ball End Hexagon L Key Set (Long Arm)

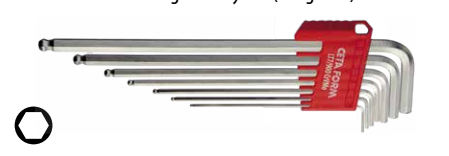



CODE NO		
LT7/900		6
7 PC: 1.5, 2, 2.5, 3, 4, 5, 6 mm		

LT/900

9 Piece Ball End Hexagon L Key Set (Long Arm)



CODE NO		
LT/900		6
9 PC: 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm		

LT/900D

LT/900 Ball End Hexagon L Key Set Display Pack



CODE NO		
LT/900D		1
12x LT/900		

2 Wrenches and Hex Keys

LT/900C

9 Piece Ball End Hexagon L Key Set (Long Arm-Color Coded)



CODE NO		
LT/900C	6	
9 PC: 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm		

LT/900M

9 Piece Ball End Hexagon L Key Set (Long Arm-Magnetic Holding Function)

new



The integrated magnet at the ball point tip prevents screws from falling, providing high comfort in vertical and overhead tasks.

CODE NO		
LT/900M	6	
9 PC: 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm		

LT12/900

12 Piece Ball End Hexagon L Key Set (Long Arm)



CODE NO		
LT12/900	6	
12 PC: 1.5, 2, 2.5, 3, 3.5, 4, 5, 6, 7, 8, 10, 12 mm		

L Series / SAE

Hexagon L Keys (Short Arm) - SAE



CODE NO				
L/0028	0.028	0.7	35	12 •
L/0035	0.035	0.9	35	12 •
L/0364	3/64	-	38	12 •
L/0050	0.05	-	41	12 •
L/0116	1/16	-	47	12 •
L/0564	5/64	-	52	12 •
L/0332	3/32	-	58	12 •
L/0764	7/64	-	58	12 •
L/0108	1/8	-	66	12 •
L/0964	9/64	-	66	12 •
L/0532	5/32	-	71	12 •
L/0316	3/16	-	83	12 •
L/0732	7/32	-	88	12 •
L/0104	1/4	-	94	12 •
L/0516	5/16	-	105	12 •
L/0308	3/8	-	118	12 •
L/0716	7/16	-	130	12 •
L/0102	1/2	-	141	12
L/0916	9/16	-	150	6
L/0508	5/8	-	172	6
L/0304	3/4	-	179	6

LT/9AF

9 Piece Hexagon L Key Set (Short Arm) - SAE



CODE NO		
LT/9AF	6	
9 PC: 1/16, 5/64, 3/32, 1/8, 5/32, 3/16, 1/4, 5/16, 3/8 inch		

LT/13AF

13 Piece Hexagon L Key Set (Short Arm) - SAE



CODE NO		
LT/13AF	6	
13 PC: 0.05, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4, 5/16, 3/8 inch		

800 Series / SAE

Hexagon L Keys (Long Arm) - SAE



CODE NO			
80050	0.05	80	12 •
80116	1/16	92	12 •
80564	5/64	102	12 •
80332	3/32	114	12 •
80764	7/64	126	12 •
80108	1/8	129	12 •
80964	9/64	137	12 •
80532	5/32	144	12 •
80316	3/16	165	12 •
80732	7/32	183	12 •
80104	1/4	186	12 •
80516	5/16	205	12 •
80308	3/8	230	12 •

LT/800AF

9 Piece Hexagon L Key Set (Long Arm) - SAE



CODE NO		
LT/800AF	6	
9 PC: 1/16, 5/64, 3/32, 1/8, 5/32, 3/16, 1/4, 5/16, 3/8 inch		

LT13/800AF

13 Piece Hexagon L Key Set (Long Arm) - SAE



CODE NO		
LT13/800AF	6	
13 PC: 0.05, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4, 5/16, 3/8 inch		

900 Series / SAE

Ball End Hexagon L Keys (Long Arm) - SAE



Ball end allows up to 25° entry

CODE NO			
90050	0.05	80	12•
90116	1/16	92	12•
90564	5/64	102	12•
90332	3/32	114	12•
90764	7/64	126	12•
90108	1/8	129	12•
90964	9/64	137	12•
90532	5/32	144	12•
90316	3/16	165	12•
90732	7/32	183	12•
90104	1/4	186	12•
90516	5/16	205	12•
90308	3/8	230	12•

700 Series

TORX L Keys (Short Arm)



CODE NO			
705	T5	44	12•
706	T6	44	12•
707	T7	47	12•
708	T8	49	12•
709	T9	51	12•
710	T10	54	12•
715	T15	56	12•
720	T20	61	12•
725	T25	65	12•
727	T27	69	12•
730	T30	75	12•
740	T40	82	12•
745	T45	86	12•
750	T50	109	12•

700L Series

TORX L Keys (Long Arm)



CODE NO			
705L	T5	73	12•
706L	T6	73	12•
707L	T7	77	12•
708L	T8	84	12•
709L	T9	99	12•
710L	T10	103	12•
715L	T15	115	12•
720L	T20	129	12•
725L	T25	145	12•
727L	T27	165	12•
730L	T30	176	12•
740L	T40	187	12•
745L	T45	208	12•

LT/900AF

9 Piece Ball End Hexagon L Key Set (Long Arm) - SAE



CODE NO	
LT/900AF	6
9 PC: 1/16, 5/64, 3/32, 1/8, 5/32, 3/16, 1/4, 5/16, 3/8 inch	

LT/700

8 Piece TORX L Key Set (Short Arm)



CODE NO	
LT/700	6
8 PC: T9, T10, T15, T20, T25, T27, T30, T40	

LT/700L

8 Piece TORX L Key Set (Long Arm)



CODE NO	
LT/700L	6
8 PC: T9, T10, T15, T20, T25, T27, T30, T40	

LT13/900AF

13 Piece Ball End Hexagon L Key Set (Long Arm) - SAE



CODE NO	
LT13/900AF	6
13 PC: 0.05, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4, 5/16, 3/8 inch	

LT13/700

13 Piece TORX L Key Set (Short Arm)



CODE NO	
LT13/700	6
13 PC: T5, T6, T7, T8, T9, T10, T15, T20, T25, T27, T30, T40, T45	

LT13/700L

13 Piece TORX L Key Set (Long Arm)



CODE NO	
LT13/700L	6
13 PC: T5, T6, T7, T8, T9, T10, T15, T20, T25, T27, T30, T40, T45	

2 Wrenches and Hex Keys

700TL Series

TORX Tamper Proof L Keys (Long Arm)



CODE NO		mm	
709TL	T9	99	12•
710TL	T10	103	12•
715TL	T15	115	12•
720TL	T20	129	12•
725TL	T25	145	12•
727TL	T27	166	12•
730TL	T30	176	12•
740TL	T40	187	12•

LT/700TL

8 Piece TORX Tamper Proof L Key Set (Long Arm)



CODE NO	
LT/700TL	6

8 PC: T9, T10, T15, T20, T25, T27, T30, T40

700B Series

Ball End TORX L Keys (Long Arm)



Ball end allows up to 25° entry

CODE NO		mm	
709B	T9	99	12•
710B	T10	103	12•
715B	T15	115	12•
720B	T20	130	12•
725B	T25	145	12•
727B	T27	166	12•
730B	T30	176	12•
740B	T40	187	12•

LT/700B

8 Piece Ball End TORX L Key Set (Long Arm)



CODE NO	
LT/700B	6

8 PC: T9, T10, T15, T20, T25, T27, T30, T40

700IPR Series

TORX IPR L Keys (Long Arm)



CODE NO		mm	
709IPR	IPR09	99	12•
710IPR	IPR10	103	12•
715IPR	IPR15	115	12•
720IPR	IPR20	130	12•
725IPR	IPR25	145	12•
727IPR	IPR27	166	12•
730IPR	IPR30	176	12•
740IPR	IPR40	187	12•

LT/700IPR

8 Piece TORX IPR L Key Set (Long Arm)



CODE NO	
LT/700IPR	6

8 PC: IPR9, IPR10, IPR15, IPR20, IPR25, IPR27, IPR30, IPR40

740 Series

Spline (XZN) L Keys



CODE NO		mm	
740/M05	M05	81	12•
740/M06	M06	90	12•
740/M08	M08	100	12•
740/M10	M10	112	12•
740/M12	M12	129	12•
740/M14	M14	152	12•

LT/740

5 Piece Spline (XZN) L Key Set



CODE NO	
LT/740	6

5 PC: M05, M06, M08, M10, M12

LT/9CP

18 Piece Combo Hexagon L Key Set (Short Arm)
- Metric/SAE



CODE NO	
LT/9CP	6

2 PC: LT/9, LT/9AF

LT/800CP

18 Piece Combo Hexagon L Key Set (Long Arm)
- Metric/SAE



CODE NO	
LT/800CP	6

2 PC: LT/800, LT/800AF

LT/900CP

18 Piece Combo Ball End Hexagon L Key Set (Long Arm)
- Metric/SAE



CODE NO	
LT/900CP	6

2 PC: LT/900, LT/900AF

LT30/900CP

30 Piece Combo Ball End Hexagon L Key Set (Long Arm) - Metric/SAE

new



CODE NO	1
LT30/900CP	1
900/Metric 15 PC: 0.7, 0.9, 1.3, 1.5, 2, 2.5, 3, 4, 4.5, 5, 5.5, 6, 7, 8, 10 mm	
900/SAE 15 PC: 0.028, 0.035, 0.05, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4, 5/16, 3/8 inch	

K10 Series

T-Handle Hexagon Keys



CODE NO	mm	mm	12
K10-020-100	2	100	12
K10-025-100	2.5	100	12
K10-030-100	3	100	12
K10-040-150	4	150	12
K10-050-150	5	150	12
K10-060-200	6	200	12
K10-070-200	7	200	12
K10-080-200	8	200	12
K10-100-200	10	200	12

K99-10-M08

8 Piece T-Handle Hexagon Key Set (on Metal Stand)



CODE NO	1
K99-10-M08	1
8 PC: 2, 2.5, 3, 4, 5, 6, 8, 10 mm	
K99-10-ME	Empty Metal Stand (for K10 and K11 series)
	1

K99-10-06

6 Piece T-Handle Hexagon Key Set (in Color Box)



CODE NO	1
K99-10-06	1
6 PC: 2.5, 3, 4, 5, 6, 8 mm	

K11 Series

T-Handle Ball End Hexagon Keys



CODE NO	mm	mm	12
K11-020-100	2	100	12
K11-025-100	2.5	100	12
K11-030-100	3	100	12
K11-040-150	4	150	12
K11-050-150	5	150	12
K11-060-200	6	200	12
K11-080-200	8	200	12
K11-100-200	10	200	12

K99-11-M08

8 Piece T-Handle Ball End Hexagon Key Set (on Metal Stand)



CODE NO	1
K99-11-M08	1
8 PC: 2, 2.5, 3, 4, 5, 6, 8, 10 mm	
K99-10-ME	Empty Metal Stand (for K10 and K11 series)
	1

K10T Series

T Hexagon Keys (3 Ways)



CODE NO	mm	mm	12
K10T-030	3	150	12
K10T-040	4	175	12
K10T-050	5	195	12
K10T-060	6	215	12

K10A Series

T-Handle Hexagon Keys - SAE



CODE NO	inch	mm	12
K10A-0564	5/64	100	12
K10A-0332	3/32	100	12
K10A-0764	7/64	100	12
K10A-0108	1/8	100	12
K10A-0964	9/64	100	12
K10A-0532	5/32	150	12
K10A-0316	3/16	150	12
K10A-0732	7/32	150	12
K10A-0104	1/4	200	12
K10A-0516	5/16	200	12
K10A-0308	3/8	200	12

K99-10A-M10

10 Piece T-Handle Hexagon Key Set (on Metal Stand) - SAE



CODE NO	1
K99-10A-M10	1
10 PC: 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4, 5/16, 3/8 inch	
K99-10A-ME	Empty Metal Stand (for K10A series)
	1

2 Wrenches and Hex Keys

K12 Series

T-Handle TORX Keys



CODE NO		mm	
K12-009-100	T9	100	12
K12-010-100	T10	105	12
K12-015-100	T15	105	12
K12-020-150	T20	155	12
K12-025-150	T25	155	12
K12-027-150	T27	155	12
K12-030-150	T30	160	12
K12-040-150	T40	160	12

K99-12-06

6 Piece C-PLUS T-Handle TORX Key Set (in Color Box)



CODE NO	
K99-12-06	1

6 PC: T10, T15, T20, T25, T30, T40

K99-12-M07

7 Piece T-Handle TORX Key Set (on Metal Stand)



CODE NO	
K99-12-M07	1

7 PC: T10, T15, T20, T25, T27, T30, T40

K99-12-ME	Empty Metal Stand (for K12 series)	1
-----------	------------------------------------	---

K99-F1

8 Piece Foldup Hexagon Key Set



CODE NO	
K99-F1	10

8 PC: 1.5, 2, 2.5, 3, 4, 5, 6, 8 mm

K99-F2

8 Piece Foldup Hexagon Key Set - SAE



CODE NO	
K99-F2	10

8 PC: 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4 inch

K99-F3

8 Piece Foldup TORX Key Set



CODE NO	
K99-F3	10

8 PC: T9, T10, T15, T20, T25, T27, T30, T40

K99-F2M

9 Piece Foldup Hexagon Key Set #1 (Metal Handle) - SAE



CODE NO	
K99-F2M	10

9 PC: 0.05, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16 inch

K99-F2M/2

9 Piece Foldup Hexagon Key Set #2 (Metal Handle) - SAE



CODE NO		
K99-F2M/2	10	10

9 PC: 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4 inch

F37 Series

TORX Flag Drivers (P-Handle)



CODE NO		mm	
F37-06	T06	40	12 •
F37-07	T07	40	12 •
F37-08	T08	40	12 •
F37-09	T09	40	12 •
F37-10	T10	40	12 •
F37-15	T15	40	12 •
F37-20	T20	40	12 •

F37-P06

6 Piece P Handle TORX Flag Driver Set



CODE NO	
F37-P06	1

6 PC: T6, T7, T8, T9, T10, T15

F37-IP Series

TORX PLUS Flag Drivers (P-Handle)



CODE NO		mm	
F37-IP08	IP08	40	12 •
F37-IP09	IP09	40	12 •
F37-IP10	IP10	40	12 •
F37-IP15	IP15	40	12 •

3 Sockets and Accessories

63 | 88



C02-H Series 1/4" Drive 6-Point Sockets

DIN 3124, TS ISO 2725-1



6.3
1/4"

CODE NO	mm	mm	
C02-H040	4	25	12 •
C02-H045	4.5	25	12 •
C02-H050	5	25	12 •
C02-H055	5.5	25	12 •
C02-H060	6	25	12 •
C02-H070	7	25	12 •
C02-H080	8	25	12 •
C02-H090	9	25	12 •
C02-H100	10	25	12 •
C02-H110	11	25	12 •
C02-H120	12	25	12 •
C02-H130	13	25	12 •
C02-H140	14	25	12 •
C02-H150	15	25	6 •

For display carded delivery = Item code + X 6

C02-RH13 13 Piece 1/4" Drive 6-Point Socket Set



CODE NO	
C02-RH13	10

13 PC: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 mm

C02A-H Series 1/4" Drive 6-Point Sockets - SAE



6.3
1/4"

CODE NO	"	mm	
C02A-H0108	1/8	25	12 •
C02A-H0532	5/32	25	12 •
C02A-H0316	3/16	25	12 •

C02A-B Series 1/4" Drive 12-Point-Sockets - SAE



6.3
1/4"

CODE NO	"	mm	
C02A-B0316	3/16	25	6 •
C02A-B0732	7/32	25	6 •
C02A-B0104	1/4	25	6 •
C02A-B0932	9/32	25	6 •
C02A-B0516	5/16	25	6 •
C02A-B1132	11/32	25	6 •
C02A-B0308	3/8	25	6 •
C02A-B0716	7/16	25	6 •
C02A-B0102	1/2	25	6 •
C02A-B0916	9/16	25	6 •

C02A-RB10 10 Piece 1/4" Drive 12-Point Socket Set - SAE



CODE NO	
C02A-RB10	10

10 PC: 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2, 9/16 inch

C02A-S Series 1/4" Drive Spline Sockets - SAE



6.3
1/4"

CODE NO	"	mm	
C02A-S0316	3/16	25	12 •
C02A-S0732	7/32	25	12 •
C02A-S1132	11/32	25	12 •
C02A-S0308	3/8	25	12 •
C02A-S0716	7/16	25	12 •

C04-H Series 1/4" Drive 6-Point Deep Sockets

DIN 3124, TS ISO 2725-1



6.3
1/4"

CODE NO	mm	mm	
C04-H040	4	50	12 •
C04-H045	4.5	50	12 •
C04-H050	5	50	12 •
C04-H055	5.5	50	12 •
C04-H060	6	50	12 •
C04-H070	7	50	12 •
C04-H080	8	50	12 •
C04-H090	9	50	12 •
C04-H100	10	50	12 •
C04-H110	11	50	12 •
C04-H120	12	50	12 •
C04-H130	13	50	12 •
C04-H140	14	50	12 •

For display carded delivery = Item code + X 6

3 Sockets and Accessories

C04-RH08

8 Piece 1/4" Drive 6-Point Deep Socket Set



CODE NO	
C04-RH08	10
8 PC: 6, 7, 8, 9, 10, 11, 12, 13 mm	

C04-B Series

1/4" Drive 12-Point Deep Sockets

DIN 3124, TS ISO 2725-1



CODE NO			
C04-B08	8	50	12 •
C04-B10	10	50	12 •
C04-B13	13	50	12 •
	For display carded delivery = Item code + X		6

C04A-B Series

1/4" Drive 12-Point Deep Sockets - SAE



CODE NO			
C04A-B0316	3/16	50	6 •
C04A-B0732	7/32	50	6 •
C04A-B0104	1/4	50	6 •
C04A-B0932	9/32	50	6 •
C04A-B0516	5/16	50	6 •
C04A-B1132	11/32	50	6 •
C04A-B0308	3/8	50	6 •
C04A-B0716	7/16	50	6 •
C04A-B0102	1/2	50	6 •
C04A-B0916	9/16	50	6 •

C04A-RB10

10 Piece 1/4" Drive 12-Point Deep Socket Set - SAE



CODE NO	
C04A-RB10	10
10 PC: 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2, 9/16 inch	

C02UA Series

1/4" Drive 12-Point Jointed Sockets - SAE



Allows up to 80° entry

CODE NO			
C02UA-0732	7/32	36	6
C02UA-0104	1/4	36	6
C02UA-0932	9/32	38	6
C02UA-0516	5/16	38	6
C02UA-1132	11/32	38	6
C02UA-0308	3/8	40	6
C02UA-0716	7/16	40	6
C02UA-0102	1/2	40	6
C02UA-0916	9/16	42	6

C02UA-RB09

9 Piece 1/4" Drive 12-Point Jointed Socket Set - SAE



CODE NO	
C02UA-RB09	6
9 PC: 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2, 9/16 inch	

C06 Series

1/4" Drive E-TORX Sockets



CODE NO			
C06-04	E04	25	12 •
C06-05	E05	25	12 •
C06-06	E06	25	12 •
C06-07	E07	25	12 •
C06-08	E08	25	12 •
C06-10	E10	25	12 •
	For display carded delivery = Item code + X		6

C06-R06

6 Piece 1/4" Drive E-TORX Socket Set



CODE NO	
C06-R06	10
6 PC: E04, E05, E06, E07, E08, E10	

C08S-S Series

1/4" Drive Slotted Socket Bits



CODE NO			
C08S-S40	4.0	37	12 •
C08S-S55	5.5	37	12 •
C08S-S65	6.5	37	12 •
	For display carded delivery = Item code + X		6

C08S-PH Series

1/4" Drive Phillips Socket Bits



CODE NO			
C08S-PH1	PH1	37	12 •
C08S-PH2	PH2	37	12 •
C08S-PH3	PH3	37	12 •
	For display carded delivery = Item code + X		6

C08S-PZ Series

1/4" Drive Pozidriv Socket Bits



CODE NO			
C08S-PZ1	PZ1	37	12 •
C08S-PZ2	PZ2	37	12 •
C08S-PZ3	PZ3	37	12 •
	For display carded delivery = Item code + X		6

C08S-T Series

1/4" Drive TORX Socket Bits



6.3
1/4"

CODE NO		mm	
C08S-T06	T06	37	12•
C08S-T07	T07	37	12•
C08S-T08	T08	37	12•
C08S-T09	T09	37	12•
C08S-T10	T10	37	12•
C08S-T15	T15	37	12•
C08S-T20	T20	37	12•
C08S-T25	T25	37	12•
C08S-T27	T27	37	12•
C08S-T30	T30	37	12•
C08S-T40	T40	37	12•

For display carded delivery = Item code + X 6

C08S-RTX7

7 Piece 1/4" Drive TORX Socket Bit Set



CODE NO	
C08S-RTX7	10

7 PC: T10, T15, T20, T25, T27, T30, T40

C08S-TR Series

1/4" Drive TORX Tamper Proof Socket Bits



6.3
1/4"

CODE NO		mm	
C08S-TR08	T08	37	12•
C08S-TR09	T09	37	12•
C08S-TR10	T10	37	12•
C08S-TR15	T15	37	12•
C08S-TR20	T20	37	12•
C08S-TR25	T25	37	12•
C08S-TR27	T27	37	12•
C08S-TR30	T30	37	12•
C08S-TR40	T40	37	12•

For display carded delivery = Item code + X 6

C08S-RTR7

7 Piece 1/4" Drive TORX Tamper Proof Socket Set



CODE NO	
C08S-RTR7	10

7 PC: T10, T15, T20, T25, T27, T30, T40

C08S-IPR Series

1/4" Drive TORX IPR Socket Bits



6.3
1/4"

CODE NO		mm	
C08S-IPR10	IPR10	37	12•
C08S-IPR15	IPR15	37	12•
C08S-IPR20	IPR20	37	12•
C08S-IPR25	IPR25	37	12•
C08S-IPR27	IPR27	37	12•
C08S-IPR30	IPR30	37	12•
C08S-IPR40	IPR40	37	12•

For display carded delivery = Item code + X 6

C08S-RTP7

7 Piece 1/4" Drive TORX IPR Socket Bit Set



CODE NO	
C08S-RTP7	10

7 PC: IPR10, IPR15, IPR20, IPR25, IPR27, IPR30, IPR40

C08S-H Series

1/4" Drive Hexagon Socket Bits



6.3
1/4"

CODE NO	mm	mm	
C08S-H25	2.5	37	12•
C08S-H30	3.0	37	12•
C08S-H40	4.0	37	12•
C08S-H50	5.0	37	12•
C08S-H60	6.0	37	12•
C08S-H70	7.0	37	12•
C08S-H80	8.0	37	12•

For display carded delivery = Item code + X 6

C08S-RHX7

7 Piece 1/4" Drive Hexagon Socket Bit Set



CODE NO	
C08S-RHX7	10

7 PC: 2.5, 3, 4, 5, 6, 7, 8 mm

C08AS-H Series

1/4" Drive Hexagon Socket Bits - SAE



6.3
1/4"

CODE NO	inch	mm	
C08AS-H0116	1/16	55	6•
C08AS-H0564	5/64	55	6•
C08AS-H0332	3/32	55	6•
C08AS-H0764	7/64	55	6•
C08AS-H0108	1/8	55	6•
C08AS-H0964	9/64	55	6•
C08AS-H0532	5/32	55	6•
C08AS-H0316	3/16	55	6•
C08AS-H0732	7/32	55	6•
C08AS-H0104	1/4	55	6•
C08AS-H0516	5/16	55	6•

C08AS-RHX11

11 Piece 1/4" Drive Hexagon Socket Bit Set - SAE



CODE NO	
C08AS-RHX11	10

11 PC: 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4, 5/16 inch

3 Sockets and Accessories

C01-11

1/4" Drive Quick Release Reversible Ratchet (Compact Head)
DIN 3122, TS ISO 3315



CODE NO	mm	TEETH	mm	
C01-11	19	60	140	6

C01-14N

1/4" Drive Quick Release Curved Reversible Ratchet
DIN 3122, TS ISO 3315



CODE NO	mm	TEETH	mm	
C01-14N	28	45	150	6

C01-HLOK

1/4" Drive HI-Lok Reversible Ratchet (Flex)
DIN 3122, TS ISO 3315



CODE NO	mm	TEETH	mm	
C01-HLOK	23	48	160	6

C01-12

1/4" Drive Quick Release Reversible Ratchet
DIN 3122, TS ISO 3315



CODE NO	mm	TEETH	mm	
C01-12	22.5	48	140	6

C01-T90

1/4" Drive T90 Sealed Reversible Ratchet
DIN 3122, TS ISO 3315



CODE NO	mm	TEETH	mm	
C01-T90	23	90	112	6

For display carded delivery = Item code + X 6

HLD-0564

HI-LOK Hex Driver



CODE NO	inch	mm	
HLD-0564	5/64	100	6

C01-15

1/4" Drive Quick Release Reversible Ratchet (Stubby)



CODE NO	mm	TEETH	mm	
C01-15	22.5	48	95	6

C01-T90L

1/4" Drive T90 Sealed Reversible Ratchet (Long Handle)
DIN 3122, TS ISO 3315




CODE NO	mm	TEETH	mm	
C01-T90L	23	90	145	6

For display carded delivery = Item code + X 6



C01-R Series

Ratchet Renewal Kits

CODE NO	
C01-11R (for C01-11)	1



C01-12R (for C01-12 / 15)	1
---------------------------	---



C01-14NR (for C01-14N)	1
------------------------	---



C01-T90R (for C01-T90)	1
------------------------	---



C01-T90LR (for C01-T90L)	1
--------------------------	---




C01-35MR

1/4" Drive Swivel Handle

DIN 3122, TS ISO 3315





CODE NO	mm	
C01-35MR	145	6

C01-20 Series

1/4" Drive Spinner Handles

DIN 3122, TS ISO 3315



CODE NO	mm	COATING TYPE	
C01-20S	40	phosphated shaft	6
C01-20	70	chrome shaft	6
	For display carded delivery = Item code + X		6



C01-20F

1/4" Drive Spinner Handle (Flexible Shaft)

DIN 3122, TS ISO 3315



Flexible shaft design for working in restricted areas,
Max. 5 Nm



CODE NO	mm	mm	
C01-20F	150	240	6
	For display carded delivery = Item code + X		6

C01-40

1/4" Drive Sliding T-Handle

DIN 3122, TS ISO 3315




CODE NO	mm		
C01-40	115	12	
	For display carded delivery = Item code + X		6

C01-50MR

1/4" Drive Speeder Brace (Detachable Palm Grip)

DIN 3122, TS ISO 3315



CODE NO	mm	
C01-50MR	420	3


C01-60

1/4" Drive T-Handle Swivel Socket Driver

DIN 3122, TS ISO 3315



For deep places, allows for up to 70° use

CODE NO	mm	
C01-60	495	6

3 Sockets and Accessories

C01-70 Series

1/4" Drive Extension Bars

DIN 3123, ISO 3316



6.3
1/4"

CODE NO	mm	
C01-71	50 - 2"	12
C01-72	75 - 3"	12
C01-73	100 - 4"	12
C01-75	150 - 6"	12
C01-77	250 - 10"	12
C01-78	350 - 14"	12
For display carded delivery = Item code + X		6

C01-73W

1/4" Drive Wobble Extension Bar



6.3
1/4"

Ball ended male square drive design allows up to 15° entry

CODE NO	mm	
C01-73W	100 - 4"	6
For display carded delivery = Item code + X		6

C01-75F

1/4" Drive Flexible Extension Bar



6.3
1/4"

Flexible shaft design for working in restricted areas

Max. 5 Nm

CODE NO	mm	
C01-75F	150 - 6"	12
For display carded delivery = Item code + X		6

C012 Series

Metal Clip Rails



CODE NO	mm	
C012-16	160	6•
C012-19	190	6•
C012-26	265	6•
C012-34	340	6•

C01-80

1/4" Drive Universal Joint

DIN 3123, ISO 3316



6.3
1/4"

CODE NO	mm	
C01-80	38	12•
For display carded delivery = Item code + X		6

C01-92

1/4" Drive Socket Adaptor

10
3/8"



6.3
1/4"

CODE NO	"	mm	
C01-92	1/4 < 3/8	26	12•
For display carded delivery = Item code + X			6

BT/8001

1/4" Drive Bit Holder Socket

1/4"



6.3
1/4"

CODE NO	"	mm	
BT/8001	1/4 - 1/4	25	12•

C01-C

1/4" Socket Clips - 10 Pieces



6.3
1/4"

CODE NO	
C01-C	1 pk.

C00-15RH4

15 Piece 1/4" Drive 6-Point Socket Set (Practical Case)



6.3
1/4"

CODE NO	
C00-15RH4	1
	C01-14N
	C01-40
	C01-73 100 mm

C00-25RH4

25 Piece 1/4" Drive 6-Point Socket Set (Practical Case)



6.3
1/4"

CODE NO	
C00-25RH4	1
	C08S-H 3, 4, 5, 6 mm
	C08S-T T20, T25, T30
	C08S-S 5.5 mm
	C08S-PH PH1, PH2

C00-27PH5

27 Piece 1/4" Drive 6-Point Socket Set (Compact Box)



6.3
1/4"

CODE NO	
C00-27PH5	1
	CB/250 PH1, PH2
	CB/1800 3, 4, 5, 6 mm
	CB/800 T10, T15, T20, T25, T30, T40
	BT/8001 1/4" - 1/4"

C04-10PH0

10 Piece 1/4" Drive 6-Point Deep Socket Set



6.3
1/4"

CODE NO	
C04-10PH0	1



C04-H 5.5, 6, 7, 8, 9, 10, 11, 12, 13 mm



C01-20

C00-46PH2

46 Piece 1/4" Drive 6-Point Socket Set



6.3
1/4"

CODE NO	
C00-46PH2	1



C02-H 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 mm



C08S-S 4, 5.5, 6.5 mm




C01-12



C08S-PH PH1, PH2, PH3




C01-20



C08S-PZ PZ1, PZ2




C01-40



C08S-T T10, T15, T20, T25, T27, T30, T40




C01-70 50 mm, 100 mm



C08S-H 3, 4, 5, 6, 7, 8 mm




C01-75F 150 mm



BT/7010 1/4" - 1/4"



C01-80



L 1.3, 1.5, 2, 2.5 mm

C00-18PH2

18 Piece 1/4" Drive 6-Point Socket Set



6.3
1/4"

CODE NO	
C00-18PH2	1



C02-H 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13 mm



C01-40



C01-12



C01-73 100 mm



C01-20



C01-80

BT/8001 1/4" - 1/4"

C00-61PH2

61 Piece 1/4" Drive 6-Point Socket Set



6.3
1/4"

CODE NO	
C00-61PH2	1



C02-H 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 mm



CB/610 4.0, 5.5, 6.5 mm



C04-H 6, 7, 8, 9, 10, 11, 12, 13 mm



CB/250 PH1, PH2, PH3



C06-E 4, 5, 6, 7, 8, 9, 10 mm



CB/350 PZ1, PZ2, PZ3



C01-12



CB/800 T6, T8, T10, T15, T20, T25, T27, T30, T40



C01-20




CB/1800 3, 4, 5, 6 mm



C01-40



BT/8001 1/4" - 1/4"



C01-70 50 mm, 100 mm



L 1.3, 1.5, 2, 2.5 mm



C01-75F 150 mm

C00A-15PBT

15 Piece 1/4" Drive 12-Point Socket Set - SAE



6.3
1/4"

CODE NO	
C00A-15PBT	1



C02A-B 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2, 9/16 inch




C01-20



C01-T90



C01-70 50 mm, 150 mm



C01-80

C00A-60PM2

60 Piece 1/4" Drive Socket Set / Metric-SAE



6.3
1/4"

CODE NO	
C00A-60PM2	1



C02A-B 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2 inch



CB/610 4.0, 5.5, 6.5 mm



C02-H 4, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13 mm



CB/250 PH1, PH2



C04A-B 3/16, 1/4, 5/16, 3/8, 7/16, 1/2 inch



CB/350 PZ1, PZ2



C04-H 6, 7, 8, 10, 12, 13 mm



CB/800 T10, T15, T20, T25, T30, T40



C01-12



CB/1800 3, 4, 5, 6 mm



C01-40



BT/8001 1/4" - 1/4"



C01-70 50 mm, 150 mm



C01-80



C01-20




L 1.5, 2, 2.5, 3 mm

3 Sockets and Accessories

C12-H Series

3/8" Drive 6-Point Sockets

DIN 3124, TS ISO 2725-1



10
3/8"

CODE NO	mm	mm	
C12-H06	6	28	12•
C12-H07	7	28	12•
C12-H08	8	28	12•
C12-H09	9	28	12•
C12-H10	10	28	12•
C12-H11	11	28	12•
C12-H12	12	28	12•
C12-H13	13	28	12•
C12-H14	14	28	12•
C12-H15	15	28	12•
C12-H16	16	30	12•
C12-H17	17	30	12•
C12-H18	18	30	12•
C12-H19	19	30	12•
C12-H20	20	32	12•
C12-H21	21	32	12•
C12-H22	22	32	12•

For display carded delivery = Item code + X 6

C12-RH10

10 Piece 3/8" Drive 6-Point Socket Set



10
3/8"

CODE NO	
C12-RH10	10

10 PC: 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm

C12A-B Series

3/8" Drive 12-Point Sockets - SAE



10
3/8"

CODE NO	mm	mm	
C12A-B0104	1/4	28	6•
C12A-B0516	5/16	28	6•
C12A-B0308	3/8	28	6•
C12A-B0716	7/16	28	6•
C12A-B0102	1/2	28	6•
C12A-B0916	9/16	28	6•
C12A-B0508	5/8	28	6•
C12A-B1116	11/16	30	6•
C12A-B0304	3/4	30	6•
C12A-B1316	13/16	30	6•
C12A-B0708	7/8	30	6•
C12A-B1516	15/16	32	6•
C12A-B1000	1	32	6•

C12A-RB13

13 Piece 3/8" Drive 12-Point Socket Set - SAE



CODE NO	
C12A-RB13	10

13 PC: 1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1 inch

C12A-S Series

3/8" Drive Spline Sockets - SAE



10
3/8"

CODE NO	mm	mm	
C12A-S0308	3/8	28	12•
C12A-S0716	7/16	28	12•
C12A-S1532	15/32	28	12•
C12A-S0102	1/2	28	12•
C12A-S0916	9/16	28	12•
C12A-S1932	19/32	28	12•
C12A-S0508	5/8	28	12•

C14-H Series

3/8" Drive 6-Point Deep Sockets

DIN 3124, TS ISO 2725-1



10
3/8"

CODE NO	mm	mm	
C14-H08	8	63	12•
C14-H09	9	63	12•
C14-H10	10	63	12•
C14-H11	11	63	12•
C14-H12	12	63	12•
C14-H13	13	63	12•
C14-H14	14	63	12•
C14-H15	15	63	12•
C14-H16	16	63	12•
C14-H17	17	63	12•
C14-H18	18	63	12•
C14-H19	19	63	12•

For display carded delivery = Item code + X 6

C14-RH10

10 Piece 3/8" Drive 6-Point Deep Socket Set



CODE NO	
C14-RH10	10

10 PC: 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm

C14-RB10

10 Piece 3/8" Drive 12-Point Deep Socket Set



CODE NO	
C14-RB10	10

10 PC: 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm

C14A-B Series

3/8" Drive 12-Point Deep Sockets - SAE



10
3/8"

CODE NO	mm	mm	
C14A-B0104	1/4	63	6•
C14A-B0516	5/16	63	6•
C14A-B0308	3/8	63	6•
C14A-B0716	7/16	63	6•
C14A-B0102	1/2	63	6•
C14A-B0916	9/16	63	6•
C14A-B0508	5/8	63	6•
C14A-B1116	11/16	63	6•
C14A-B0304	3/4	63	6•
C14A-B1316	13/16	63	6•
C14A-B0708	7/8	63	6•
C14A-B1516	15/16	63	6•
C14A-B1000	1	63	6•

C14A-RB13

13 Piece 3/8" Drive 12-Point Deep Socket Set - SAE



CODE NO	
C14A-RB13	10

13 PC: 1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1 inch

C12U-RB10

10 Piece 3/8" Drive 12-Point Joint Socket Set



CODE NO	
C12U-RB10	6
10 PC: 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm	

C16 Series

3/8" Drive E-TORX Sockets



CODE NO		mm	
C16-04	E04	28	12•
C16-05	E05	28	12•
C16-06	E06	28	12•
C16-07	E07	28	12•
C16-08	E08	28	12•
C16-10	E10	28	12•
C16-11	E11	28	12•
C16-12	E12	28	12•
C16-14	E14	28	12•
C16-16	E16	28	12•
C16-18	E18	28	12•
C16-20	E20	28	12•
	For display carded delivery = Item code + X		6

C16-R10

10 Piece 1/4"+3/8" Drive E-TORX Socket Set



CODE NO	
C16-R10	10
5 PC: C06 E4, E5, E6, E7, E8 - 1/4 inch	
5 PC: C16 E10, E12, E14, E16, E18 - 3/8 inch	

C16D Series

3/8" Drive E-TORX Deep Sockets



CODE NO		mm	
C16D-08	E08	63	6•
C16D-10	E10	63	6•
C16D-12	E12	63	6•
C16D-14	E14	63	6•
	For display carded delivery = Item code + X		6

C18S-T Series

3/8" Drive TORX Socket Bits



CODE NO		mm	
C18S-T10	T10	48	12•
C18S-T15	T15	48	12•
C18S-T20	T20	48	12•
C18S-T25	T25	48	12•
C18S-T27	T27	48	12•
C18S-T30	T30	48	12•
C18S-T40	T40	48	12•
C18S-T45	T45	48	12•
C18S-T50	T50	48	12•
C18S-T55	T55	48	12•
	For display carded delivery = Item code + X		6

C18S-RT09

9 Piece 3/8" Drive TORX Socket Bit Set



CODE NO	
C18S-RT09	10
9 PC: T10, T15, T20, T25, T27, T30, T40, T45, T50	

C15-RH10

10 Piece 3/8" Drive Crowfoot Wrench Set



CODE NO	
C15-RH10	6
10 PC: 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm	

C18S-H Series

3/8" Drive Hexagon Socket Bits



CODE NO		mm	
C18S-H03	3	48	12•
C18S-H04	4	48	12•
C18S-H05	5	48	12•
C18S-H06	6	48	12•
C18S-H07	7	48	12•
C18S-H08	8	48	12•
C18S-H09	9	48	12•
C18S-H10	10	48	12•
	For display carded delivery = Item code + X		6

C18S-RH08

8 Piece 3/8" Drive Hexagon Socket Bit Set



CODE NO	
C18S-RH08	10
8 PC: 3, 4, 5, 6, 7, 8, 9, 10 mm	




3 Sockets and Accessories

C11-11

3/8" Drive Quick Release Reversible Ratchet (Compact Head)

DIN 3122, TS ISO 3315






CODE NO		TEETH		
C11-11	27	60	200	6

C11-12

3/8" Drive Quick Release Reversible Ratchet

DIN 3122, ISO 3315






CODE NO		TEETH		
C11-12	30.5	48	200	6

C11-14N

3/8" Drive Quick Release Curved Reversible Ratchet

DIN 3122, ISO 3315



CODE NO		TEETH		
C11-14N	33	45	210	6


C11-T90

3/8" Drive T90 Sealed Reversible Ratchet

DIN 3122, TS ISO 3315



CODE NO		TEETH		
C11-T90	33	90	200	6



 For display carded delivery = Item code + X 6

C11-36MR

3/8" Drive Swivel Handle (Metal Handle)

DIN 3122, TS ISO 3315



CODE NO		
C11-36MR	250	6

C11-R Series

Ratchet Renewal Kits

CODE NO	
C11-11R (for C11-11)	1



C11-12R (for C11-12)	1
----------------------	---



C11-14NR (for C11-14N)	1
------------------------	---



C11-T90R (for C11-T90)	1
------------------------	---






C11-20 Series

3/8" Drive Spinner Handles

DIN 3122, TS ISO 3315






CODE NO		
C11-20S	35	6
C11-20	60	6
 For display carded delivery = Item code + X		6

C11-40

3/8" Drive Sliding T-Handle

DIN 3122, TS ISO 3315





CODE NO		
C11-40	200	12
 For display carded delivery = Item code + X		6

C11-50MR

3/8" Drive Speeder Brace (Detachable Palm Grip)

DIN 3122, TS ISO 3315



CODE NO		
C11-50MR	420	3

C11-60

3/8" Drive T-Handle Swivel Socket Driver

DIN 3122, TS ISO 3315



For deep places, allows for up to 70° use

CODE NO		
C11-60	500	3

C11-70 Series

3/8" Drive Extension Bars

DIN 3123, ISO 3316



10
3/8"

CODE NO	mm "	
C11-72	75 - 3"	12
C11-75	150 - 6"	12
C11-77	250 - 10"	12
C11-78	350 - 14"	6
C11-79	450 - 18"	6
For display carded delivery = Item code + X		6

C11-70W Series

3/8" Drive Wobble Extension Bars



10
3/8"

Ball ended male square drive allows up to 15° entry

CODE NO	mm "	
C11-72W	75 - 3"	6
C11-75W	150 - 6"	6
For display carded delivery = Item code + X		6

C11-76F

3/8" Drive Flexible Extension Bar



10
3/8"

Flexible shaft design for working in restricted areas

Max. 10 Nm

CODE NO	mm "	
C11-76F	200 - 8"	6
For display carded delivery = Item code + X		6

C11-80

3/8" Drive Universal Joint

DIN 3123, ISO 3316



10
3/8"

CODE NO	mm	
C11-80	53	12 •
For display carded delivery = Item code + X		6

C11-91

3/8" Drive Socket Adaptor - F:3/8" M:1/4"

DIN 3123, ISO 3316

6.3
1/4"



10
3/8"

3-Way design suitable for use with extension bars

CODE NO	" "	mm	
C11-91	3/8 > 1/4	28	12 •
For display carded delivery = Item code + X			6

C11-92S

3/8" Drive Socket Adaptor - F:3/8" M:1/2"

DIN 3123, ISO 3316

12.5
1/2"



10
3/8"

CODE NO	" "	mm	
C11-92S	3/8 < 1/2	43	12 •
For display carded delivery = Item code + X			6

C11-92

3/8" Drive Socket Adaptor (3-Way) - F:3/8" M:1/2"

DIN 3123, ISO 3316

12.5
1/2"



10
3/8"

CODE NO	" "	mm	
C11-92	3/8 < 1/2	43	12 •
For display carded delivery = Item code + X			6

BT/8000 3/8" Series

3/8" Drive Bit Holder Sockets



10
3/8"

For use with 1/4", 5/16" or H10 bits, spring loaded for quick changes

CODE NO	" "	mm	
BT/8003	1/4"	28	6 •
BT/8004	5/16"	28	6 •
BT/8005	10 mm	28	6 •

C012 Series

Metal Clip Rails



CODE NO	mm	
C012-16	160	6 •
C012-19	190	6 •
C012-26	265	6 •
C012-34	340	6 •

C11-C

3/8" Socket Clips - 10 Pieces



10
3/8"

CODE NO	
C11-C	1 pk.



3 Sockets and Accessories

C10-18PH4

18 Piece 3/8" Drive 6-Point Socket Set



10
3/8"

CODE NO	
C10-18PH4	1



C12-H 6, 7, 8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 22 mm



C11-70 75 mm, 150 mm



C11-14N



C11-80

C10-20PH2

20 Piece 3/8" Drive 6-Point Socket Set



10
3/8"

CODE NO	
C10-20PH2	1



C12-H 6, 7, 8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 22 mm



C11-70 75 mm, 150 mm



C17-R16 16 mm



C11-80



C11-12



C21-91 D:1/2" > E:3/8"

C10A-17PBT

17 Piece 3/8" Drive 12-Point Socket Set - SAE



10
3/8"

CODE NO	
C10A-17PBT	1



C12A-B 1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1 inch



C11-70 75 mm, 150 mm



C11-T90



C11-80

C10-60PH2

60 Piece 3/8" Drive 6-Point Socket Set



10
3/8"

CODE NO	
C10-60PH2	1



C12-H 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22 mm



C185-T T15, T20, T25, T27, T30, T40, T45, T50, T55



C14-H 8, 10, 11, 12, 13, 14, 15, 17, 19 mm



C185-H 4, 5, 6, 7, 8, 9, 10 mm



C16 E5, E6, E7, E8, E10, E12, 14, E16



C11-12



C17-R 16, 21 mm



C11-70 75 mm, 150 mm



L 1.5, 2, 2.5, 3 mm



C11-80

C21-91 D:1/2" > E:3/8"

C10A-41PM2

41 Piece 3/8" Drive Socket Set / Metric - SAE



10
3/8"

CODE NO	
C10A-41PM2	1




C12-H 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22 mm



C11-12



C12A-B 1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8 inch




C11-20



C14-H 8, 10, 12, 13 mm



C11-70 75 mm, 150 mm



C11-80

C14A-B 5/16, 3/8, 1/2, 9/16 inch

C22-H Series

1/2" Drive 6-Point Sockets

DIN 3124, TS ISO 2725-1



12.5
1/2"

CODE NO			
C22-H08	8	38	12•
C22-H09	9	38	12•
C22-H10	10	38	12•
C22-H11	11	38	12•
C22-H12	12	38	12•
C22-H13	13	38	12•
C22-H14	14	38	12•
C22-H15	15	38	12•
C22-H16	16	38	12•
C22-H17	17	38	12•
C22-H18	18	38	12•
C22-H19	19	38	12•
C22-H20	20	38	12•
C22-H21	21	38	12•
C22-H22	22	40	12•
C22-H23	23	40	6•
C22-H24	24	42	6•
C22-H25	25	42	6•
C22-H26	26	42	6•
C22-H27	27	43	6•
C22-H28	28	43	6•
C22-H29	29	44	6•
C22-H30	30	46	6•
C22-H32	32	46	6•



For display carded delivery = Item code + X

6

C22-B Series

1/2" Drive 12-Point Sockets

DIN 3124, TS ISO 2725-1



12.5
1/2"

CODE NO			
C22-B08	8	38	12•
C22-B09	9	38	12•
C22-B10	10	38	12•
C22-B11	11	38	12•
C22-B12	12	38	12•
C22-B13	13	38	12•
C22-B14	14	38	12•
C22-B15	15	38	12•
C22-B16	16	38	12•
C22-B17	17	38	12•
C22-B18	18	38	12•
C22-B19	19	38	12•
C22-B20	20	38	12•
C22-B21	21	39	12•
C22-B22	22	40	12•
C22-B23	23	40	6•
C22-B24	24	42	6•
C22-B25	25	42	6•
C22-B26	26	42	6•
C22-B27	27	43	6•
C22-B28	28	43	6•
C22-B29	29	43	6•
C22-B30	30	46	6•
C22-B32	32	46	6•



For display carded delivery = Item code + X

6

C22A-B Series

1/2" Drive 12-Point Sockets - SAE



12.5
1/2"

CODE NO	⌀"	mm	Box
C22A-B03	3/8	38	6•
C22A-B04	7/16	38	6•
C22A-B05	1/2	38	6•
C22A-B06	9/16	38	6•
C22A-B07	5/8	38	6•
C22A-B08	11/16	38	6•
C22A-B09	3/4	38	6•
C22A-B10	13/16	38	6•
C22A-B11	7/8	38	6•
C22A-B12	15/16	38	6•
C22A-B13	1	40	6•
C22A-B14	1-1/16	42	6•
C22A-B15	1-1/8	44	6•
C22A-B16	1-3/16	44	6•
C22A-B17	1-1/4	44	6•
For display carded delivery = Item code + X			6

C22-RH11

11 Piece 1/2" Drive 6-Point Socket Set



CODE NO	Box
C22-RH11	10
11 PC: 10, 11, 12, 13, 14, 15, 16, 17, 19, 21, 22 mm	

C22-RB11

11 Piece 1/2" Drive 12-Point Socket Set



CODE NO	Box
C22-RB11	10
11 PC: 10, 11, 12, 13, 14, 15, 16, 17, 19, 21, 22 mm	

C22A-RB11

11 Piece 1/2" Drive 12-Point Socket Set - SAE



CODE NO	Box
C22A-RB11	10
11 PC: 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1 inch	

C24-H Series

1/2" Drive 6-Point Deep Sockets

DIN 3124, TS ISO 2725-1



12.5
1/2"

CODE NO	⌀mm	mm	Box
C24-H08	8	77	12•
C24-H10	10	77	12•
C24-H11	11	77	12•
C24-H12	12	77	12•
C24-H13	13	77	12•
C24-H14	14	77	12•
C24-H15	15	77	12•
C24-H16	16	77	12•
C24-H17	17	77	12•
C24-H18	18	77	12•
C24-H19	19	77	12•
C24-H20	20	77	12•
C24-H21	21	77	12•
C24-H22	22	77	12•
C24-H24	24	77	6•
C24-H27	27	77	6•
C24-H30	30	77	6•
C24-H32	32	77	6•
For display carded delivery = Item code + X			6

C24-RH09

9 Piece 1/2" Drive 6-Point Deep Socket Set



CODE NO	Box
C24-RH09	5
9 PC: 10, 11, 12, 13, 14, 17, 19, 21, 22 mm	

C26 Series

1/2" Drive E-TORX Sockets



12.5
1/2"

CODE NO	⌀	mm	Box
C26-10	E10	38	12•
C26-11	E11	38	12•
C26-12	E12	38	12•
C26-14	E14	38	12•
C26-16	E16	38	12•
C26-18	E18	38	12•
C26-20	E20	38	12•
C26-22	E22	38	12•
C26-24	E24	38	12•
For display carded delivery = Item code + X			6

C24-B Series

1/2" Drive 12-Point Deep Sockets

DIN 3124, TS ISO 2725-1



12.5
1/2"

CODE NO	⌀mm	mm	Box
C24-B08	8	77	12•
C24-B10	10	77	12•
C24-B11	11	77	12•
C24-B12	12	77	12•
C24-B13	13	77	12•
C24-B14	14	77	12•
C24-B15	15	77	12•
C24-B16	16	77	12•
C24-B17	17	77	12•
C24-B18	18	77	12•
C24-B19	19	77	12•
C24-B20	20	77	12•
C24-B21	21	77	12•
C24-B22	22	77	12•
C24-B24	24	77	6•
C24-B27	27	77	6•
C24-B30	30	77	6•
C24-B32	32	77	6•
For display carded delivery = Item code + X			6

C24-RB09

9 Piece 1/2" Drive 12-Point Deep Socket Set



CODE NO	Box
C24-RB09	5
9 PC: 10, 11, 12, 13, 14, 17, 19, 21, 22 mm	

C26-R08

8 Piece 1/2" Drive E-TORX Socket Set



CODE NO	Box
C26-R08	10
8 PC: E10, E12, E14, E16, E18, E20, E22, E24	

3 Sockets and Accessories

C28S-T Series

1/2" Drive TORX Socket Bits - Short



12.5
1/2"

CODE NO		mm	
C28S-T20	T20	55	12•
C28S-T25	T25	55	12•
C28S-T27	T27	55	12•
C28S-T30	T30	55	12•
C28S-T35	T35	55	12•
C28S-T40	T40	55	12•
C28S-T45	T45	55	12•
C28S-T50	T50	55	12•
C28S-T55	T55	55	6•
C28S-T60	T60	55	6•
C28S-T70	T70	55	6•
	For display carded delivery = Item code + X		6

C28S-RT9

9 Piece 1/2" Drive TORX Socket Bit Set- Short



CODE NO	
C28S-RT9	10
9 PC: T20, T25, T27, T30, T40, T45, T50, T55, T60	

C28S-TL Series

1/2" Drive TORX Socket Bits - Long



12.5
1/2"

CODE NO		mm	
C28S-T20L	T20	100	12•
C28S-T25L	T25	100	12•
C28S-T27L	T27	100	12•
C28S-T30L	T30	100	12•
C28S-T35L	T35	100	12•
C28S-T40L	T40	100	12•
C28S-T45L	T45	100	12•
C28S-T50L	T50	100	12•
C28S-T55L	T55	100	6•
C28S-T60L	T60	100	6•
C28S-T70L	T70	100	6•
	For display carded delivery = Item code + X		6

C28S-TR Series

1/2" Drive TORX Tamper Proof Socket Bits- Short



12.5
1/2"

CODE NO		mm	
C28S-TR30	T30	55	6•
C28S-TR40	T40	55	6•
C28S-TR45	T45	55	6•
C28S-TR50	T50	55	6•
C28S-TR55	T55	55	6•
	For display carded delivery = Item code + X		6

C28S-TR30XL

1/2" Drive TORX Tamper Proof Socket Bit- Extra Long



12.5
1/2"

CODE NO		mm	
C28S-TR30XL	T30	140	6•
	For display carded delivery = Item code + X		6

C28S-H Series

1/2" Drive Hexagon Socket Bits - Short



12.5
1/2"

CODE NO	mm	mm	
C28S-H04	4	55	12•
C28S-H05	5	55	12•
C28S-H06	6	55	12•
C28S-H07	7	55	12•
C28S-H08	8	55	12•
C28S-H09	9	55	12•
C28S-H10	10	55	12•
C28S-H12	12	55	12•
C28S-H14	14	55	6•
C28S-H17	17	60	6•
C28S-H19	19	60	6•
	For display carded delivery = Item code + X		6

C28S-RH9

9 Piece 1/2" Drive Hexagon Socket Bit Set - Short



CODE NO	
C28S-RH9	10
9 PC: 4, 5, 6, 7, 8, 10, 12, 14, 17 mm	

C28S-HL Series

1/2" Drive Hexagon Socket Bits - Long



12.5
1/2"

CODE NO	mm	mm	
C28S-H05L	5	100	12•
C28S-H06L	6	100	12•
C28S-H06XL	6	140	6•
C28S-H06XL2	6	220	6•
C28S-H07L	7	100	12•
C28S-H08L	8	100	12•
C28S-H09L	9	100	12•
C28S-H10L	10	100	12•
C28S-H10XL	10	140	6•
C28S-H11L	11	100	12•
C28S-H12L	12	100	12•
C28S-H12XL	12	140	6•
C28S-H13L	13	100	6•
C28S-H14L	14	100	6
	For display carded delivery = Item code + X		6



C28AS-H Series

1/2" Drive Hexagon Socket Bits - SAE



12.5
1/2"

CODE NO	mm	mm	
C28AS-H0532	5/32	55	6•
C28AS-H0316	3/16	55	6•
C28AS-H0732	7/32	55	6•
C28AS-H0104	1/4	55	6•
C28AS-H0516	5/16	55	6•
C28AS-H0308	3/8	55	6•
C28AS-H0102	1/2	55	6•
C28AS-H0916	9/16	55	6•
C28AS-H0508	5/8	55	6•

C28AS-RH9

9 Piece 1/2" Drive Hexagon Socket Bit Set - SAE



CODE NO	
C28AS-RH9	10
9 PC: 5/32, 3/16, 7/32, 1/4, 5/16, 3/8, 1/2, 9/16, 5/8 inch	

C28S-HBXL Series

1/2" Drive Ball End Hexagon Socket Bits - Extra Long



12.5
1/2"

Ball end allows up to 25° entry

CODE NO	mm	mm	
C28S-HB05XL	5	140	6•
C28S-HB06XL	6	140	6•
C28S-HB07XL	7	140	6•
C28S-HB08XL	8	140	6•
C28S-HB10XL	10	140	6•
For display carded delivery = Item code + X			6

C28S-X Series

1/2" Drive XZN Socket Bits - Short



12.5
1/2"

CODE NO		mm	
C28S-X05	M05	55	6•
C28S-X06	M06	55	6•
C28S-X08	M08	55	6•
C28S-X10	M10	55	6•
C28S-X12	M12	55	6•
C28S-X14	M14	55	6•
C28S-X16	M16	55	6•
For display carded delivery = Item code + X			6

C28S-RX6

6 Piece 1/2" Drive XZN Socket Bit Set - Short



CODE NO	
C28S-RX6	10
6 PC: M05, M06, M08, M10, M12, M14	

C28S-X.L Series

1/2" Drive XZN Socket Bits - Long



CODE NO		mm	
C28S-X06L	M06	100	6•
C28S-X08L	M08	100	6•
C28S-X10L	M10	100	6•
C28S-X10XL	M10	140	6•
C28S-X12L	M12	100	6•
C28S-X12XL	M12	140	6•
C28S-X14L	M14	100	6•
For display carded delivery = Item code + X			6

C28S-RX5L

5 Piece 1/2" Drive XZN Socket Bit Set - Long



CODE NO	
C28S-RX5L	10
5 PC: M06, M08, M10, M12, M14	

C28S-RL Series

1/2" Drive RIBE Socket Bits - Long



12.5
1/2"

CODE NO		mm	
C28S-R05L	M05	99	6•
C28S-R06L	M06	99	6•
C28S-R08L	M08	99	6•
C28S-R10L	M10	99	6•
C28S-R12L	M12	99	6•
C28S-R14L	M14	99	6•
For display carded delivery = Item code + X			6

C28S-RR6L

6 Piece 1/2" Drive RIBE Socket Bit Set - Long



CODE NO	
C28S-RR6L	10
6 PC: M05, M06, M08, M10, M12, M14	

3 Sockets and Accessories

C28-SS40

40 Piece H10 TORX/Hex/XZN Bit Set



CODE NO	mm	TEETH	mm	mm	mm
C28-SS40	10	32	60	255	6



BT/8005 3/8" - 10 mm
BT/8008 1/2" - 10 mm



CB/1000G T20, T25, T30, T40, T45, T50, T55



CB/1100G T20, T25, T30, T40, T45, T50, T55



CB/2000G 4, 5, 6, 7, 8, 10, 12 mm



CB/2100G 4, 5, 6, 7, 8, 10, 12 mm



CB/3000G M5, M6, M8, M10, M12



CB/3100G M5, M6, M8, M10, M12

C28S-17PTH

17 Piece 1/2" TORX and Hexagon Socket Bit Set



CODE NO	mm	TEETH	mm	mm	mm
C28S-17PTH	12.5	42	45	250	6



C28S-T T20, T25, T27, T30, T40, T45, T50, T55, T60



C28S-H 5, 6, 7, 8, 10, 12, 14 mm



C21-40

C20-18PTX

18 Piece 1/2" TORX Socket Set



CODE NO	mm	TEETH	mm	mm	mm
C20-18PTX	12.5	41	90	255	6



C26 E10, E11, E12, E14, E16, E18, E20, E22, E24



C28S-T T20, T25, T27, T30, T40, T45, T50, T55, T60

C21-11

1/2" Drive Quick Release Reversible Ratchet (Compact Head)

DIN 3122, TS ISO 3315



CODE NO	mm	TEETH	mm	mm	mm
C21-11	12.5	32	60	255	6

C21-12

1/2" Drive Quick Release Reversible Ratchet

DIN 3122, TS ISO 3315



CODE NO	mm	TEETH	mm	mm	mm
C21-12	12.5	41.5	48	260	6

C21-14N

1/2" Drive Quick Release Curved Reversible Ratchet

DIN 3122, TS ISO 3315



CODE NO	mm	TEETH	mm	mm	mm
C21-14N	12.5	42	45	250	6

C21-T90

1/2" Drive T90 Sealed Reversible Ratchet

DIN 3122, TS ISO 3315



CODE NO	mm	TEETH	mm	mm	mm
C21-T90	12.5	41	90	255	6



For display carded delivery = Item code + X

C21-12T

1/2" Drive Quick Release Reversible Ratchet (Extendable)

DIN 3122, TS ISO 3315



CODE NO	mm	TEETH	mm	mm	mm
C21-12T	12.5	42	45	300 - 430	6

Telescopic handle with 25 mm increments, chucked design.

C21-R Series

1/2" Ratchet Renewal Kits

CODE NO	mm	TEETH	mm	mm	mm
C21-11R (for C21-11)	12.5	32	60	255	6



CODE NO	mm	TEETH	mm	mm	mm
C21-12R (for C21-12)	12.5	41.5	48	260	6



CODE NO	mm	TEETH	mm	mm	mm
C21-14NR (for C21-14N and C21-12T)	12.5	42	45	250	6



CODE NO	mm	TEETH	mm	mm	mm
C21-T90R (for C21-T90)	12.5	41	90	255	6



C21-20

1/2" Drive Offset Handle

DIN 3122, TS ISO 3315



CODE NO	mm	TEETH	mm	mm	mm
C21-20	12.5	41	90	255	6

C21-30MR Series

1/2" Drive Swivel Handles (Metal Grip)



CODE NO	mm	TEETH	mm	mm	mm
C21-38MR	12.5	41	90	255	6
C21-39MR	12.5	41	90	255	6

C21-40 Series

1/2" Drive Sliding T-Handles

DIN 3122, TS ISO 3315



12.5
1/2"

CODE NO	mm	
C21-40	250	12
C21-40L	300	12
For display carded delivery = Item code + X		6

C21-50

1/2" Drive Speeder Brace

DIN 3122, TS ISO 3315



12.5
1/2"

CODE NO	mm	
C21-50	420	3

C21-60

1/2" Drive T-Handle Swivel Socket Driver

DIN 3122, TS ISO 3315



12.5
1/2"

CODE NO	mm	
C21-60	500	3

C012 Series

Metal Clip Rails (Empty)



CODE NO	mm	
C012-16	160	6•
C012-19	190	6•
C012-26	265	6•
C012-34	340	6•

C21-70 Series

1/2" Drive Extension Bars

DIN 3123, ISO 3316



12.5
1/2"

CODE NO	mm	
C21-72	75 - 3"	12
C21-74	125 - 5"	12
C21-77	250 - 10"	12
For display carded delivery = Item code + X		6

C21-70W Series

1/2" Drive Wobble Extension Bars



12.5
1/2"

Ball ended male square drive design allows up to 15° entry

CODE NO	mm	
C21-71W	50 - 2"	6
C21-74W	125 - 5"	6
C21-77W	250 - 10"	6
C21-79W	500 - 20"	6
For display carded delivery = Item code + X		6

C21-80

1/2" Universal Joint

DIN 3123, ISO 3316



12.5
1/2"

CODE NO	mm	
C21-80	73	12•
For display carded delivery = Item code + X		6

C21-C

1/2" Socket Clips - 10 Pieces



12.5
1/2"

CODE NO		
C21-C		1 pk.

C21-91S

1/2" Drive Socket Adaptor - F:1/2" M:3/8"

DIN 3123, ISO 3316

10
3/8"



12.5
1/2"

CODE NO	"	mm	
C21-91S	1/2 > 3/8	38	12•
For display carded delivery = Item code + X			6

C21-91

1/2" Drive Socket Adaptor (3 Ways) - F:1/2" M:3/8"

DIN 3123, ISO 3316

10
3/8"



12.5
1/2"

CODE NO	"	mm	
C21-91	1/2 > 3/8	38	12•
For display carded delivery = Item code + X			6

C21-92

1/2" Drive Socket Adaptor - F:1/2" M:3/4"

DIN 3123, ISO 3316

20
3/4"



12.5
1/2"

CODE NO	"	mm	
C21-92	1/2 < 3/4	50	12•
For display carded delivery = Item code + X			6

BT/8000 1/2" Series

1/2" Drive Bit Holder Sockets



12.5
1/2"

For use with 1/4", 5/16" or H10 bits, spring loaded for quick changes

CODE NO	"	mm	
BT/8006	1/4"	38	6•
BT/8007	5/16"	38	6•
BT/8008	10 mm	38	6•

3 Sockets and Accessories

C21-90KIT15

15 Piece Socket Adaptor Set



CODE NO	
C21-90KIT15	1
BT/8001 1/4" - 1/4"	
BT/8004 3/8" - 5/16"	
BT/8005 3/8" - 10 mm	
BT/8007 1/2" - 5/16"	
BT/8008 1/2" - 10 mm	
C01-92 D:1/4" < E:3/8"	
C11-91 D:3/8" > E:1/4"	
C11-92S D:3/8" < E:1/2"	
C21-91S D:1/2" > E:3/8"	
C21-92 D:1/2" < E:3/4"	
C31-91 D:3/4" > E:1/2"	
BT/7015 (1/4" - 1/4") x 50 mm	
BT/7020 (3/8" - 1/4") x 50 mm	
BT/7030 (1/2" - 1/4") x 50 mm	
BT/02 (1/4" x 60 mm)	

C21-90KIT6

6 Piece Socket Adaptor Set



CODE NO	
C21-90KIT6	1
C01-92 D:1/4" < E:3/8"	
C21-91S D:1/2" > E:3/8"	
C11-92S D:3/8" < E:1/2"	
C11-91 D:3/8" > E:1/4"	
C21-92 D:1/2" < E:3/4"	
C31-91 D:3/4" > E:1/2"	

C20-18PH2

18 Piece 1/2" Drive 6-Point Socket Set



12.5
1/2"

CODE NO	
C20-18PH2	1
C22-H 8, 10, 11, 12, 13, 14, 15, 16, 17, 19, 21, 22, 24 mm	
C11-92 D:3/8" < E:1/2"	
C21-12	
C21-70 125 mm, 250 mm	
C21-80	

C20-23PH4

23 Piece 1/2" Drive 6-Point Socket Set



12.5
1/2"

CODE NO	
C20-23PH4	1
C22-H 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32 mm	
C21-14N	
C21-70 125 mm, 250 mm	
C11-92 D:3/8" < E:1/2"	
C21-80	

C20-25PH2

25 Piece 1/2" Drive 6-Point Socket Set



12.5
1/2"

CODE NO	
C20-25PH2	1
C22-H 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32 mm	
C21-12	
C21-70 125 mm, 250 mm	
C21-80	
C11-92 D:3/8" < E:1/2"	
C27-R 16, 21 mm	

C20-25PB2

25 Piece 1/2" Drive 12-Point Socket Set



12.5
1/2"

CODE NO	
C20-25PB2	1
C22-B 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32 mm	
C21-12	
C21-70 125 mm, 250 mm	
C21-80	
C11-92 D:3/8" < E:1/2"	
C27-R 16, 21 mm	

C20-56PH2

56 Piece 1/2" Drive 6-Point Socket Set



12.5
1/2"

CODE NO	
C20-56PH2	1



C22-H 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32 mm



C24-H 10, 12, 13, 14, 15, 16, 17, 19, 22 mm




C27-R 16, 21 mm



C21-12



C21-40



C21-70 125 mm, 250 mm



C21-80



BT/8007 1/2" - 5/16"




CB/516SL 8, 10, 12 mm




CB/516PH PH2, PH3, PH4



CB/516PZ PZ2, PZ3, PZ4



CB/516TX T20, T25, T30, T40, T45, T50, T55



CB/516HX 5, 6, 7, 8, 10, 12, 14

C20-49PH2

49 Piece 1/2" Drive 6-Point Socket And Wrench Set



12.5
1/2"

CODE NO	
C20-49PH2	1



B01 8, 10, 11, 12, 13, 14, 17, 19 mm



C22-H 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32 mm




C24-H 10, 13, 17, 19 mm



C27-R 16, 21 mm



C21-12



C21-70 125 mm, 250 mm



C21-80



C11-92 D:3/8" < E:1/2"




BT/8007 1/2" - 5/16"




CB/516SL 10 mm



CB/516PH PH2, PH3, PH4



CB/516TX T30, T40, T45, T50



CB/516HX 5, 6, 8 mm

C20-35PH4

35 Piece 1/4"+1/2" Drive 6-Point Socket Set



6.3
1/4"

12.5
1/2"

CODE NO	
C20-35PH4	1



C02-H 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13 mm



C01-14N



C01-80




C01-73 100 mm

C22-H 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32 mm



C21-14N




C21-74 125 mm



C21-80



L 1.3, 1.5, 2, 2.5, 3 mm



C01-73 100 mm

C20A-20PBT

20 Piece 1/2" Drive 12-Point Socket Set - SAE



12.5
1/2"


CODE NO	
C20A-20PBT	1



C22A-B 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-3/16, 1-1/4 inch



C21-T90



C21-70 125 mm, 250 mm



C11-92 D:3/8" < E:1/2"



C21-80

C20A-34PM2

34 Piece 1/2" Drive Socket Set / Metric - SAE



12.5
1/2"

CODE NO	
C20A-34PM2	1



C22-H 8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32 mm




C22A-B 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1 inch



C21-12



C21-40



C21-70 125 mm, 250 mm




C21-80



3 Sockets and Accessories

C20-96PH2

96 Piece 1/4"+1/2" Drive 6-Point Socket Set

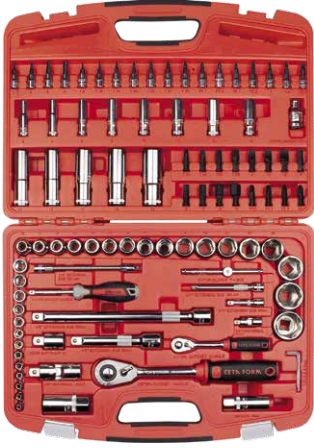

6.3
1/4" 12.5
1/2"

CODE NO	
C20-96PH2	1



C02-H 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 mm



C04-H 6, 7, 8, 9, 10, 11, 12, 13 mm



C08S-S 4, 5.5, 6.5 mm



C08S-PH PH1, PH2



C08S-PZ PZ1, PZ2



C08S-T T8, T10, T15, T20, T25, T27, T30



C08S-H 3, 4, 5, 6 mm




C01-12



C01-20



C01-40



C01-70 50 mm, 100 mm



C01-75F 150 mm



C01-80



C11-92 D:3/8" > E:1/2"



C22-H 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32 mm



C24-H 14, 15, 17, 19, 22 mm



C27-R 16, 21 mm



C21-12



C21-70 125 mm, 250 mm



C21-80



BT/8007 1/2" - 5/16"



CB/516SL 8, 10, 12 mm



CB/516PH PH3, PH4



CB/516PZ PZ3, PZ4



CB/516TX T40, T45, T50, T55




CB/516HX 7, 8, 10, 12, 14 mm



L 1.3, 1.5, 2, 2.5 mm

C20-180PH2

180 Piece 1/4" + 3/8" + 1/2" Drive 6-Point Socket Set

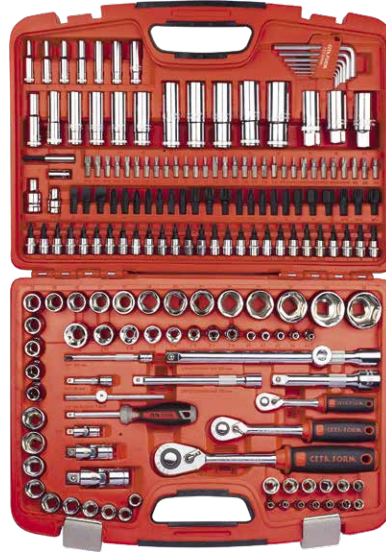

6.3
1/4" 10
3/8" 12.5
1/2"

CODE NO	
C20-180PH2	1



C02-H 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 mm



C04-H 4, 5, 6, 7, 8, 9, 10 mm



C06 E4, E5, E6, E7, E8



C08S-S 4, 5.5, 6.5 mm



C08S-PH PH1, PH2



C08S-PZ PZ1, PZ2



C08S-T T8, T9, T10, T15, T20, T25, T27, T30



C08S-H 3, 4, 5, 6 mm



C08S-TR T8, T9, T10, T15, T20, T25, T27, T30



C08S-H 3, 4, 5, 6 mm




C01-12



C01-20



C01-40



C01-70 50 mm, 100 mm



C01-80



C12-H 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm



C14-H 10, 11, 12, 13, 14, 15 mm



C16 E10, E11, E12, E14, E16, E18



C17-R18 18 mm



C11-12



C11-75 150 mm



C11-80



C11-92 D:3/8" > E:1/2"



C22-H 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32 mm



C24-H 16, 17, 18, 19, 22 mm



C26 E20, E24



C27-R 16, 21 mm



C21-12



C21-70 125 mm, 250 mm



C21-80



LT/7 1.5, 2, 2.5, 3, 4, 5, 6 mm



BT/8001 1/4" - 1/4"



CB/250 PH0, PH1, PH2, PH3



CB/350 PZ0, PZ1, PZ2, PZ3



CB/800 T5, T6, T7, T8, T9, T10, T15, T20, T25, T27, T30, T40



CB/800IPR IPR10, IPR15, IPR20, IPR25, IPR27, IPR30, IPR40



CB/850 M5, M6, M8



BT/02 1/4" x 60 mm



BT/8004 3/8" - 5/16"



BT/8007 1/2" - 5/16"



CB/516SL 8, 10, 12 mm



CB/516PH PH3, PH4



CB/516PZ PZ3, PZ4



CB/516TX T40, T45, T50, T55, T60, T70



CB/516TR T40, T45, T50



CB/516HX 7, 8, 10, 12, 14 mm



CB/516XZ M10, M12, M14

C32-H Series

3/4" Drive 6-Point Sockets

DIN 3124, TS ISO 2725-1



20
3/4"

CODE NO	mm	mm	
C32-H19	19	50	6
C32-H21	21	50	6
C32-H22	22	50	6
C32-H24	24	52	6
C32-H27	27	52	6
C32-H30	30	54	6
C32-H32	32	55	3
C32-H33	33	56	3
C32-H34	34	56	3
C32-H36	36	57	3
C32-H38	38	60	3
C32-H41	41	64	3
C32-H46	46	68	3
C32-H50	50	72	3
C32-H55	55	75	3
C32-H60	60	78	3

C32-B Series

3/4" Drive 12-Point Sockets

DIN 3124, TS ISO 2725-1



20
3/4"

CODE NO	mm	mm	
C32-B22	22	50	6
C32-B24	24	50	6
C32-B27	27	52	6
C32-B30	30	54	6
C32-B32	32	56	3
C32-B36	36	58	3
C32-B38	38	60	3
C32-B41	41	64	3
C32-B46	46	68	3
C32-B50	50	73	3

C32A-B Series

3/4" Drive 12-Point Sockets - SAE



20
3/4"

CODE NO	"	mm	
C32A-B11	7/8	50	6
C32A-B12	15/16	50	6
C32A-B13	1	51	6
C32A-B14	1-1/16	52	6
C32A-B15	1-1/8	52	6
C32A-B17	1/1/4	54	3

C38S-H Series

3/4" Drive Hexagon Socket Bits



20
3/4"

CODE NO	mm	mm	
C38S-H14	14	80	6
C38S-H17	17	80	6
C38S-H19	19	80	6
C38S-H22	22	80	6

C31-12-2

3/4" Drive Quick Release Reversible Ratchet

DIN 3122, TS ISO 3315



20
3/4"

CODE NO	mm	TEETH	mm	
C31-12-2	63	24	505	1

C31-12-2R

Ratchet Renewal Kit

CODE NO		
C31-12-2R	(for C31-12-2)	1



C31-40

3/4" Drive Sliding T-Handle

DIN 3122, TS ISO 3315



20
3/4"

CODE NO	mm	
C31-40	500	3

C31-70 Series

3/4" Drive Extension Bars

DIN 3123, ISO 3316



20
3/4"

CODE NO	mm	
C31-73	100 - 4"	6
C31-76	200 - 8"	6
C31-78	400 - 16"	6

C31-91

3/4" Drive Socket Adaptor - F:3/4" M:1/2"

DIN 3123, ISO 3316



12.5
1/2"

20
3/4"

CODE NO	"	mm	
C31-91	3/4 > 1/2	54	6

C31-92

3/4" Drive Socket Adaptor - F:3/4" M:1"

DIN 3123, ISO 3316



25
1"

20
3/4"

CODE NO	"	mm	
C31-92	3/4 < 1	63	6

3 Sockets and Accessories

C30-14MH2

14 Piece 3/4" 6-Point Socket Set



CODE NO	
C30-14MH2	1



C32-H 22, 24, 27, 30, 32, 36, 38, 41, 46, 50 mm



C31-40 500 mm



C31-12-2 505 mm



C31-70 100, 200 mm

C30-14MB2

14 Piece 3/4" Drive 12-Point Socket Set



CODE NO	
C30-14MB2	1



C32-B 22, 24, 27, 30, 32, 36, 38, 41, 46, 50 mm



C31-40 500 mm



C31-12-2 505 mm



C31-70 100, 200 mm




C42-B Series

1" Drive 12-Point Sockets

DIN 3124, TS ISO 2725-1



25
1"




CODE NO			
C42-B32	32	63	3
C42-B36	36	65	3
C42-B41	41	70	3
C42-B46	46	70	3
C42-B50	50	75	3
C42-B55	55	80	1
C42-B60	60	82	1
C42-B65	65	87	1
C42-B70	70	94	1
C42-B75	75	100	1
C42-B80	80	103	1

C41-12

1" Drive Reversible Ratchet



25
1"

CODE NO		TEETH		
C41-12	70	24	675	1

C41-12/H

1" Drive Reversible Ratchet (Head Only)



25
1"

CODE NO		TEETH		
C41-12/H	70	24	200	1

C41-12R

Ratchet Renewal Kit (for C41-12)





CODE NO	
C41-12R	1

C41-12/T

Tommy Bar (for C41-12/H and C41-40R)



CODE NO		
C41-12/T	550	1



C41-40

1" Drive Sliding T-Handle

DIN 3122, TS ISO 3315



25
1"

CODE NO		
C41-40	550	1

C41-40R

1" Square Drive (for C41-40)



25
1"

CODE NO	
C41-40R	1



C41-70 Series

1" Drive Extension Bars

DIN 3123, ISO 3316



25
1"

CODE NO		
C41-76	200 - 8"	1
C41-78	400 - 16"	1

C41-91

1" Drive Socket Adaptor - F:1" M:3/4"

DIN 3123, ISO 3316



20
3/4"

25
1"

CODE NO			
C41-91	1 > 3/4	64	3

C40-15MB2

15 Piece 1" 12-Point Socket Set



CODE NO	
C40-15MB2	1



C42-B 36, 41, 46, 50, 55, 60, 65, 70, 75, 80 mm



C41-12/T 545 mm



C41-40R



C41-12/H 200 mm



C41-70 200 mm, 400 mm

C52-H06
1/4" Drive 6-Point Impact Socket

DIN 3129, TS ISO 2725-2



CODE NO	mm	mm	
C52-H06	6	25	6•
For display carded delivery = Item code + X			6

C52R-H Series
3/8" Drive 6-Point Impact Sockets

DIN 3129, TS ISO 2725-2



CODE NO	mm	mm	
C52R-H08	8	30	6•
C52R-H09	9	30	6•
C52R-H10	10	30	6•
C52R-H11	11	30	6•
C52R-H12	12	30	6•
C52R-H13	13	30	6•
C52R-H14	14	30	6•
C52R-H15	15	30	6•
C52R-H16	16	30	6•
C52R-H17	17	30	6•
C52R-H18	18	30	6•
C52R-H19	19	30	6•
For display carded delivery = Item code + X			6

C52R-RH10
10 Piece 3/8" Drive 6-Point Impact Socket Set



CODE NO	
C52R-RH10	6
10 PC: 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm	

C51R-72
3/8" Drive Impact Extension Bar



CODE NO	mm	
C51R-72	75 - 3"	6
For display carded delivery = Item code + X		6

C51R-80
3/8" Drive Impact Universal Joint



CODE NO	mm	
C51R-80	50	6
For display carded delivery = Item code + X		6

C51R-91
3/8" Drive Impact Socket Adaptor - F:3/8" M:1/4"



CODE NO	"	"	mm	
C51R-91	3/8	> 1/4	32	6•
For display carded delivery = Item code + X				6

C51R-92
3/8" Drive Impact Socket Adaptor - F:3/8" M:1/2"



CODE NO	"	"	mm	
C51R-92	3/8	< 1/2	36	6•
For display carded delivery = Item code + X				6

C62-H Series
1/2" Drive 6-Point Impact Sockets

DIN 3129, TS ISO 2725-2



CODE NO	mm	mm	
C62-H08	8	38	6•
C62-H09	9	38	6•
C62-H10	10	38	6•
C62-H11	11	38	6•
C62-H12	12	38	6•
C62-H13	13	38	6•
C62-H14	14	38	6•
C62-H15	15	38	6•
C62-H16	16	38	6•
C62-H17	17	38	6•
C62-H18	18	38	6•
C62-H19	19	38	6•
C62-H20	20	38	6•
C62-H21	21	38	6•
C62-H22	22	38	6•
C62-H23	23	38	6•
C62-H24	24	42	6•
C62-H25	25	42	6•
C62-H26	26	42	6•
C62-H27	27	42	6•
C62-H28	28	42	6•
C62-H30	30	42	6•
C62-H32	32	45	6•
C62-H36	36	50	6•
For display carded delivery = Item code + X			6
Not available for sizes bigger than 32 mm			

C62-RH09
9 Piece 1/2" Drive 6-Point Impact Socket Set



CODE NO	
C62-RH09	6
9 PC: 10, 11, 12, 13, 14, 17, 19, 21, 22 mm	

3 Sockets and Accessories

C64-H Series

1/2" Drive 6-Point Impact Deep Sockets

DIN 3129, TS ISO 2725-2



12.5
1/2"

CODE NO	Ømm	mm	Box
C64-H08	8	78	6
C64-H09	9	78	6
C64-H10	10	78	6
C64-H11	11	78	6
C64-H12	12	78	6
C64-H13	13	78	6
C64-H14	14	78	6
C64-H15	15	78	6
C64-H16	16	78	6
C64-H17	17	78	6
C64-H18	18	78	6
C64-H19	19	78	6
C64-H20	20	78	6
C64-H21	21	78	6
C64-H22	22	78	6
C64-H23	23	78	6
C64-H24	24	78	6
C64-H25	25	78	6
C64-H26	26	78	6
C64-H27	27	78	6
C64-H28	28	78	6
C64-H30	30	78	6
C64-H32	32	78	6
C64-H36	36	78	6

For display carded delivery = Item code + X 6

C64-RH09

9 Piece 1/2" Drive 6-Point Impact Deep Socket Set



CODE NO	Box
C64-RH09	6

9 PC: 10, 11, 12, 13, 14, 17, 19, 21, 22 mm

C64-B Series

1/2" Drive 12-Point Impact Deep Sockets

DIN 3129, TS ISO 2725-2



12.5
1/2"

CODE NO	Ømm	mm	Box
C64-B32	32	78	6
C64-B34	34	78	6
C64-B36	36	78	6

For display carded delivery = Item code + X 6

C66-E Series

1/2" Drive E-TORX Impact Sockets



12.5
1/2"

CODE NO	Star	mm	Box
C66-E10	E10	38	6
C66-E12	E12	38	6
C66-E14	E14	38	6
C66-E16	E16	38	6
C66-E18	E18	38	6
C66-E20	E20	38	6
C66-E22	E22	38	6
C66-E24	E24	38	6

For display carded delivery = Item code + X 6

C66-R08

8 Piece 1/2" Drive E-TORX Impact Socket Set



CODE NO	Box
C66-R08	6

8 PC: E10, E12, E14, E16, E18, E20, E22, E24

C68-T Series

1/2" Drive Impact TORX Socket Bits



12.5
1/2"

CODE NO	Star	mm	Box
C68-T30	T30	78	6
C68-T40	T40	78	6
C68-T45	T45	78	6
C68-T50	T50	78	6
C68-T55	T55	78	6
C68-T60	T60	78	6
C68-T70	T70	78	6
C68-T80	T80	78	6

For display carded delivery = Item code + X 6

C68-RT07

7 Piece 1/2" Drive Impact TORX Socket Bit Set



CODE NO	Box
C68-RT07	1

7 PC: T30, T40, T45, T50, T55, T60, T70

C68-H Series

1/2" Drive Impact Hexagon Socket Bits



12.5
1/2"

CODE NO	Ømm	mm	Box
C68-H05	5	78	6
C68-H06	6	78	6
C68-H07	7	78	6
C68-H08	8	78	6
C68-H10	10	78	6
C68-H12	12	78	6
C68-H14	14	78	6
C68-H17	17	78	6
C68-H19	19	78	6

For display carded delivery = Item code + X 6


C68-RH07

7 Piece 1/2" Drive Impact Hexagon Socket Bit Set



CODE NO	Box
C68-RH07	1

7 PC: 5, 6, 8, 10, 12, 14, 17 mm

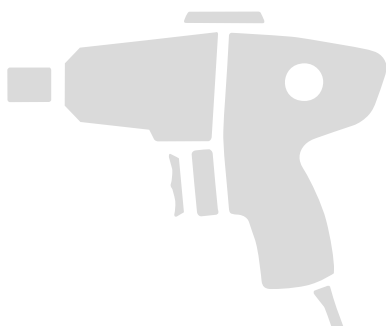

C68-X Series
1/2" Drive Impact XZN Socket Bits



12.5
1/2"

CODE NO	mm	mm	mm
C68-X06	M06	78	6
C68-X08	M08	78	6
C68-X10	M10	78	6
C68-X12	M12	78	6
C68-X14	M14	78	6
C68-X16	M16	78	6
C68-X18	M18	78	6
For display carded delivery = Item code + X			6

C68-RX07
7 Piece 1/2" Drive Impact XZN Socket Bit Set



CODE NO	mm	mm
C68-RX07		1

7 PC: M6, M8, M10, M12, M14, M16, M18

C61-70 Series
1/2" Drive Impact Extension Bars



12.5
1/2"

CODE NO	mm	mm
C61-72	75 - 3"	6
C61-74	125 - 5"	6
For display carded delivery = Item code + X		6

C61-80
1/2" Drive Impact Universal Joint



12.5
1/2"

CODE NO	mm	mm
C61-80	63	6
For display carded delivery = Item code + X		6

C61-91
1/2" Drive Impact Socket Adaptor - F:1/2" M:3/8"



10
3/8"

12.5
1/2"

CODE NO	mm	mm	mm
C61-91	1/2 > 3/8	38	6
For display carded delivery = Item code + X			6

C61-92
1/2" Drive Impact Socket Adaptor - F:1/2" M:3/4"



20
3/4"

12.5
1/2"

CODE NO	mm	mm	mm
C61-92	1/2 < 3/4	48	6
For display carded delivery = Item code + X			6

C61-90KIT7
7 Piece Impact Socket Adaptor Set



CODE NO	mm	mm
C61-90KIT7		1



C51R-91 D:3/8" > E:1/4"



C71-91 D:3/4" > E:1/2"



C51R-92 D:3/8" < E:1/2"



C71-92 D:3/4" < E:1"



C61-91 D:1/2" > E:3/8"



C81-91 D:1" > E:3/4"



C61-92 D:1/2" < E:3/4"

C72-H Series
3/4" Drive 6-Point Impact Sockets



DIN 3129, TS ISO 2725-2



20
3/4"

CODE NO	mm	mm	mm
C72-H17	17	51	3
C72-H18	18	51	3
C72-H19	19	51	3
C72-H20	20	51	3
C72-H21	21	51	3
C72-H22	22	51	3
C72-H23	23	51	3
C72-H24	24	51	3
C72-H25	25	51	3
C72-H26	26	51	3
C72-H27	27	56	3
C72-H28	28	56	3
C72-H30	30	56	3
C72-H32	32	56	3
C72-H33	33	56	3
C72-H34	34	56	3
C72-H35	35	56	3
C72-H36	36	56	3
C72-H38	38	56	3
C72-H41	41	56	3
C72-H46	46	70	3
C72-H50	50	70	3
C72-H55	55	80	1
C72-H60	60	80	1

C74-H Series
3/4" Drive 6-Point Impact Deep Sockets



20
3/4"

CODE NO	mm	mm	mm
C74-H17	17	90	1
C74-H18	18	90	1
C74-H19	19	90	1
C74-H20	20	90	1
C74-H21	21	90	1
C74-H22	22	90	1
C74-H23	23	90	1
C74-H24	24	90	1
C74-H25	25	90	1
C74-H26	26	90	1
C74-H27	27	90	1
C74-H28	28	90	1
C74-H30	30	90	1
C74-H32	32	90	1
C74-H33	33	90	1
C74-H34	34	90	1
C74-H35	35	90	1
C74-H36	36	90	1
C74-H38	38	90	1
C74-H41	41	90	1
C74-H46	46	90	1
C74-H50	50	90	1

3 Sockets and Accessories

C71-70 Series

3/4" Drive Impact Extension Bars



20
3/4"

CODE NO	mm "	
C71-75	175 - 7"	3
C71-77	250 - 10"	3

C71-80

3/4" Drive Impact Universal Joint



20
3/4"

CODE NO	mm	
C71-80	90	3

C71-91

3/4" Drive Impact Socket Adaptor - F:3/4" M:1/2"



12.5
1/2"



Warranty Void

20
3/4"

CODE NO	" "	mm	
C71-91	3/4 > 1/2	58	3



12.5
1/2"

C71-91R	for C71-91	1
---------	------------	---

C71-92

3/4" Drive Impact Socket Adaptor - F:1" M:3/4"



25
1"



20
3/4"

CODE NO	" "	mm	
C71-92	3/4 < 1	63	3

C82-H Series

1" Drive 6-Point Impact Sockets



DIN 3129, TS ISO 2725-2



25
1"

CODE NO	mm	mm	
C82-H24	24	60	1
C82-H25	25	60	1
C82-H26	26	60	1
C82-H27	27	60	1
C82-H28	28	60	1
C82-H30	30	60	1
C82-H32	32	62	1
C82-H33	33	62	1
C82-H34	34	62	1
C82-H35	35	62	1
C82-H36	36	65	1
C82-H38	38	70	1
C82-H41	41	70	1
C82-H46	46	70	1
C82-H50	50	80	1
C82-H55	55	80	1
C82-H60	60	80	1
C82-H65	65	100	1
C82-H70	70	100	1
C82-H75	75	100	1
C82-H80	80	100	1

C84-H Series

1" Drive 6-Point Impact Deep Sockets



25
1"

CODE NO	mm	mm	
C84-H24	24	90	1
C84-H25	25	90	1
C84-H26	26	90	1
C84-H27	27	90	1
C84-H28	28	90	1
C84-H30	30	90	1
C84-H32	32	90	1
C84-H33	33	90	1
C84-H34	34	90	1
C84-H35	35	90	1
C84-H36	36	90	1
C84-H38	38	90	1
C84-H41	41	90	1
C84-H46	46	95	1
C84-H50	50	100	1
C84-H55	55	105	1
C84-H60	60	110	1
C84-H65	65	115	1
C84-H70	70	120	1
C84-H75	75	135	1
C84-H80	80	135	1

C81-70 Series

1" Drive Impact Extension Bars



25
1"

CODE NO	mm "	
C81-75	175 - 7"	1
C81-77	250 - 10"	1

C81-91

1" Drive Impact Socket Adaptor - F:1" M:3/4"



20
3/4"

Warranty Void

25
1"

CODE NO	" "	mm	
C81-91	1 > 3/4	70	1



4 Torque Wrenches

89 | 90



D02F2 Series

Exact Torque Wrenches (Window Scaled)

DIN/EN ISO 6789



± 4 %

Click type with reversible ratchet (45-tooth), Nm / lbf.ft window scale, push-lock scale setting, supplied in plastic case

Individual calibration certificate to DIN ISO 6789

CODE NO	N-m	"	mm	
D02F2-0125	5 - 25	1/4	275	1
D02F2-1105	10 - 50	3/8	418	1
D02F2-1110	20 - 100	3/8	418	1
D02F2-2110	20 - 100	1/2	418	1
D02F2-2120	40 - 200	1/2	502	1
D02F2-2130	60 - 340	1/2	594	1

D02F2-R Series

Ratchet Renewal Kits (for D02F2 Series)



CODE NO		
D02F2-01R	for D02F2-0125	1
D02F2-11R	for D02F2-1105 and 1110	1
D02F2-21R/1	for D02F2-2110	1
D02F2-21R/2	for D02F2-2120 and 2130	1

D03F-31 Series

3/4" Drive Duo Torque Wrenches (Etch Scaled)

DIN/EN ISO 6789



± 4 %

20 3/4"

Click type with reversible ratchet (48-tooth), Nm / lbf.ft etch scale, CW/CCW direction, pull down chuck scale setting/locking, supplied in plastic case

Individual calibration certificate to DIN ISO 6789

CODE NO	N-m	mm	
D03F-3155	110-550	918	1
D03F-3175	150-750	1125	1
D03F-3110	200-1000	1200	1

D03F-31R

Ratchet Renewal Kit (for D03F-31 Series)



CODE NO		
D03F-31R	3/4"	1

D03-21 Series

1/2" Drive CLASSIC Torque Wrenches

DIN/EN ISO 6789



± 4 %

12.5 1/2"

Click type with fixed square drive, Nm / kgf.m / lbf.ft / lbf.in etch scale, supplied in plastic case

Individual calibration certificate to DIN ISO 6789

CODE NO	N-m	mm	
D03-2114	25 - 135	556	1
D03-2123	50 - 225	585	1
D03-2133	70 - 330	805	1

D03-21R

1/2" Spare Square Drive (for D03-21 Series)



12.5 1/2"

CODE NO		
D03-21R		6

D32 Series

1/4" Hex. Drive Torque Screwdrivers

DIN ISO 6789 & ASME B107.300-2010



1/4"

± 6 %



- Tolerance of torque ±6%.
- 6.3mm (1/4") Hex drive for bit
- Slipping clutch mechanism.
- Automatic adjustment knob design.
- Easy-to-read laser scale.
- Applied to both clockwise & counterclockwise directions.
- Ergonomic comfort rubber grip.

CODE NO	Nm	Graduation	mm	
D32-14B012	0.1 ~ 1.2	0.01	180	1
D32-14B060	1 ~ 6	0.1	195	1

4 Torque Wrenches

D02E Series

Exacto Insert Torque Wrenches



±4 %
Includit

Rectangular drive for insert tools, Nm / lbf.ft window scale, push-lock scale setting, supplied in plastic case
Individual calibration certificate to DIN ISO 6789

CODE NO	N-m	mm	mm	
D02E-0910	20 - 100	9x12	385	1
D02E-1420	40 - 200	14x18	475	1
D02E-1430	60 - 340	14x18	570	1

D02E-RH09 Series

Insert Reversible Ratchets (9x12)



9x12

CODE NO	"	mm	TEETH	
D02E-RH0938	3/8	56	24	1
D02E-RH0912	1/2	69	24	1

D02E-OE09 Series

Insert Open End Wrenches (9x12)



9x12

CODE NO	mm	mm	
D02E-OE0908	8	17.5	1
D02E-OE0910	10	17.5	1
D02E-OE0911	11	17.5	1
D02E-OE0912	12	17.5	1
D02E-OE0913	13	17.5	1
D02E-OE0914	14	20	1
D02E-OE0915	15	20	1
D02E-OE0916	16	20	1
D02E-OE0917	17	20	1
D02E-OE0918	18	20	1
D02E-OE0919	19	20	1

D02E-RE09 Series

Insert Ring End Wrenches (9x12)



9x12

CODE NO	mm	mm	
D02E-RE0908	8	17.5	1
D02E-RE0910	10	17.5	1
D02E-RE0911	11	17.5	1
D02E-RE0912	12	17.5	1
D02E-RE0913	13	17.5	1
D02E-RE0914	14	17.5	1
D02E-RE0915	15	17.5	1
D02E-RE0916	16	17.5	1
D02E-RE0917	17	17.5	1
D02E-RE0918	18	17.5	1
D02E-RE0919	19	17.5	1
D02E-RE0922	22	17.5	1

D02E-RH1412

1/2" Drive Insert Reversible Ratchet (14x18)



14x18

CODE NO	"	mm	TEETH	
D02E-RH1412	1/2	78	24	1

D02E-OE14 Series

Insert Open End Wrenches (14x18)



14x18

CODE NO	mm	mm	
D02E-OE1413	13	25	1
D02E-OE1414	14	25	1
D02E-OE1415	15	25	1
D02E-OE1416	16	25	1
D02E-OE1417	17	25	1
D02E-OE1418	18	25	1
D02E-OE1419	19	25	1
D02E-OE1421	21	25	1
D02E-OE1422	22	25	1
D02E-OE1424	24	25	1
D02E-OE1427	27	31.5	1
D02E-OE1430	30	31.5	1
D02E-OE1432	32	31.5	1

D02E-RE14 Series

Insert Ring End Wrenches (14x18)



14x18

CODE NO	mm	mm	
D02E-RE1413	13	25	1
D02E-RE1414	14	25	1
D02E-RE1415	15	25	1
D02E-RE1416	16	25	1
D02E-RE1417	17	25	1
D02E-RE1418	18	25	1
D02E-RE1419	19	25	1
D02E-RE1421	21	25	1
D02E-RE1422	22	25	1
D02E-RE1424	24	25	1
D02E-RE1427	27	31	1
D02E-RE1430	30	31	1
D02E-RE1432	32	31	1

D20-P Series

Torque Multiplier Sets



P2131 max input: 500 Nm max output: 1.500 Nm
P3141 max input: 1.000 Nm max output: 3.000 Nm

CODE NO	"	"	
D20-P2131	1/2 - 3/4		1
D20-P3141	3/4 - 1		1

D20HR Series

Torque Multipliers (High Ratio)



CODE NO	MAX RATED OUTPUT (Nm)	"	"	
D20HR-300	3000	1/2 - 1		1
D20HR-450	4500	1/2 - 1		1



Max Rated Input:
D20HR-300: 200 Nm (Ratio: 15.5:1)
D20HR-450: 180 Nm (Ratio: 26:1)

Max Rated Output:

D20HR-300: 3000 Nm (Ratio: 15.5:1)
D20HR-450: 4500 Nm (Ratio: 26:1)

D06-21

1/2" Drive Torque Angle Gauge



12.5
1/2"

CODE NO	mm	
D06-21	52	1

5 Screwdrivers and Bits

91 | 112



3K
TECHNOLOGY

F10 Series/ C

C-PLUS Slotted Screwdrivers (Cabinet Tip)

DIN TS ISO 2380-1



CODE NO	Ø mm	mm	
F10-025-075	2.5	75	12
F10-030-075	3.0	75	12
F10-030-100	3.0	100	12
F10-035-100	3.5	100	12
F10-040-075	4.0	75	12
F10-040-100	4.0	100	12
F10-040-125	4.0	125	12
F10-040-150	4.0	150	12
F10-045-100	4.5	100	12
F10-060-150	6.0	150	12

Stubby Series



F10-040-025	4.0	25	12
F10-055-025	5.5	25	12
F10-065-025	6.5	25	12

F10 Series / W

C-PLUS Slotted Screwdrivers (Flared Tip)

DIN TS ISO 2380-1



CODE NO	Ø mm	mm	
F10-055-100	5.5	100	12
F10-055-125	5.5	125	12
F10-055-150	5.5	150	12
F10-055-200	5.5	200	12
F10-065-100	6.5	100	12
F10-065-125	6.5	125	12
F10-065-150	6.5	150	12
F10-065-200	6.5	200	12
F10-080-150	8.0	150	12
F10-080-175	8.0	175	12
F10-100-200	10.0	200	12
F10-100-250	10.0	250	12
F10-120-250	12.0	250	12

F10-300 Series

C-PLUS Slotted Screwdrivers (Extra Long Shaft)

DIN TS ISO 2380-1



CODE NO	Ø mm	mm	
F10-040-300	4.0	300	12
F10-055-300	5.5	300	12
F10-065-300	6.5	300	12

F10M Series

C-PLUS Slotted Screwdrivers (Screw Holder Magnet)



CODE NO	Ø mm	mm	
F10M-045-100	4.5	100	12
F10M-060-150	6.0	150	12

F14 Series

C-PLUS Phillips Screwdrivers

DIN ISO 8764-1, TS 59-5



CODE NO		mm	
F14-000-060	PH0	60	12
F14-000-080	PH0	80	12
F14-001-080	PH1	80	12
F14-001-100	PH1	100	12
F14-001-125	PH1	125	12
F14-001-200	PH1	200	12
F14-002-100	PH2	100	12
F14-002-125	PH2	125	12
F14-002-150	PH2	150	12
F14-002-200	PH2	200	12
F14-003-150	PH3	150	12
F14-004-200	PH4	200	12

Stubby Series



F14-001-025	PH1	25	12
F14-002-025	PH2	25	12

F14-XL Series

C-PLUS Phillips Screwdrivers (Extra Long Shaft)

DIN ISO 8764-1, TS 59-5



CODE NO		mm	
F14-001-300	PH1	300	12
F14-001-500	PH1	500	6
F14-002-300	PH2	300	12
F14-002-500	PH2	500	6



Screwdriver hangers



Add suffix "X" to the standard item code to order screwdrivers on display hangers.

5 Screwdrivers and Bits

F17 Series

C-PLUS Pozidriv Screwdrivers

DIN ISO 8764-1, TS 59-5



CODE NO	+	mm	mm	mm
F17-000-060	PZ0	60	12	
F17-001-080	PZ1	80	12	
F17-002-100	PZ2	100	12	
F17-003-150	PZ3	150	12	
F17-004-200	PZ4	200	12	

Stubby Series



F17-001-025	PZ1	25	12
F17-002-025	PZ2	25	12

F17-300 Series

C-PLUS Pozidriv Screwdrivers (Extra Long Shaft)

DIN ISO 8764-1, TS 59-5



CODE NO	+	mm	mm	mm
F17-001-300	PZ1	300	12	
F17-002-300	PZ2	300	12	

F18 Series

C-PLUS TORX Screwdrivers



CODE NO	T	mm	mm	mm
F18-005-060	T05	60	12	
F18-006-060	T06	60	12	
F18-007-060	T07	60	12	
F18-008-060	T08	60	12	
F18-009-060	T09	60	12	
F18-010-080	T10	80	12	
F18-015-080	T15	80	12	
F18-020-100	T20	100	12	
F18-025-100	T25	100	12	
F18-027-115	T27	115	12	
F18-030-115	T30	115	12	
F18-040-130	T40	130	12	
F18-045-130	T45	130	12	

F18-300 Series

C-PLUS TORX Screwdrivers (Extra Long Shaft)



CODE NO	T	mm	mm	mm
F18-015-300	T15	300	12	
F18-020-300	T20	300	12	
F18-025-300	T25	300	12	
F18-030-300	T30	300	12	

F19 Series

C-PLUS TORX Tamper Proof Screwdrivers



CODE NO	T	mm	mm	mm
F19-010-080	T10	80	12	
F19-015-080	T15	80	12	
F19-020-100	T20	100	12	
F19-025-100	T25	100	12	
F19-027-115	T27	115	12	
F19-030-115	T30	115	12	
F19-040-130	T40	130	12	

F20 Series

C-PLUS Nut Drivers

DIN 3125, ISO 2236, TS 3793



CODE NO	mm	mm	mm	mm
F20-040-125	4	125	12	
F20-050-125	5	125	12	
F20-055-125	5.5	125	12	
F20-060-125	6	125	12	
F20-070-125	7	125	12	
F20-080-125	8	125	12	
F20-090-125	9	125	12	
F20-100-125	10	125	12	
F20-110-125	11	125	12	
F20-120-125	12	125	12	
F20-130-125	13	125	12	
F20-140-125	14	125	12	

F20A Series

C-PLUS Nut Drivers - SAE



CODE NO	inch	mm	mm	mm
F20A-0104	1/4	125	12	
F20A-0516	5/16	125	12	
F20A-0308	3/8	125	12	
F20A-0102	1/2	125	12	

F21 Series

C-PLUS Nut Drivers (Flexible Shaft)



CODE NO	mm	mm	mm	mm
F21-050-150	5	150	12	
F21-060-150	6	150	12	
F21-070-150	7	150	12	
F21-080-150	8	150	12	
F21-100-150	10	150	12	

F22 Series

C-PLUS Hexagon Screwdrivers



CODE NO	mm	mm	mm	mm
F22-020-060	2	60	12	
F22-025-080	2.5	80	12	
F22-030-080	3	80	12	
F22-040-100	4	100	12	
F22-050-100	5	100	12	
F22-060-125	6	125	12	
F22-080-150	8	150	12	

F22A Series

C-PLUS Hexagon Screwdrivers - SAE



CODE NO	inch	mm	mm	mm
F22A-0116	1/16	60	12	
F22A-0564	5/64	60	12	
F22A-0332	3/32	80	12	
F22A-0764	7/64	80	12	
F22A-0108	1/8	80	12	
F22A-0964	9/64	80	12	
F22A-0532	5/32	100	12	
F22A-0316	3/16	100	12	

F23 Series

C-PLUS Ball End Hexagon Screwdrivers



Ball end allows up to 25° entry

CODE NO	mm	mm	mm	mm
F23-020-100	2	100	12	
F23-025-100	2.5	100	12	
F23-030-100	3	100	12	
F23-040-100	4	100	12	
F23-050-100	5	100	12	
F23-060-125	6	125	12	
F23-080-150	8	150	12	

F23A Series

C-PLUS Ball End Hexagon Screwdrivers - SAE



Ball end allows up to 25° entry

CODE NO	inch	mm	mm	mm
F23A-0532	5/32	100	12	
F23A-0316	3/16	100	12	
F23A-0732	7/32	100	12	
F23A-0104	1/4	125	12	
F23A-0516	5/16	150	12	
F23A-0308	3/8	150	12	

F24 Series

C-PLUS Square Screwdriver (Robertson)



CODE NO	Icon	mm	Icon
F24-001-080	No.1	80	12
F24-002-100	No.2	100	12
F24-003-150	No.3	150	12

F25 Series

C-PLUS TRI-WING Screwdrivers



CODE NO	Icon	mm	Icon
F25-002-080	TW2	80	12
F25-003-080	TW3	80	12
F25-004-100	TW4	100	12
F25-005-100	TW5	100	12

F99-200 Series

2 Piece C-PLUS Screwdriver Sets



CODE NO	Icon	Icon
F99-201	1	1
<ul style="list-style-type: none"> F10 6.5x100 mm F14 PH2x100 mm 		
F99-201P	1	1
<ul style="list-style-type: none"> F10 6.5x100 mm F17 PZ2x100 mm 		

F99-200 Series / TP

2 Piece C-PLUS Stubby Screwdriver Sets



CODE NO	Icon	Icon
F99-202	1	1
<ul style="list-style-type: none"> F10/TP 6.5x25 mm F14/TP PH2x25 mm 		
F99-202P	1	1
<ul style="list-style-type: none"> F10/TP 6.5x25 mm F17/TP PZ2x25 mm 		

F99-400 Series


4 Piece C-PLUS Screwdriver Sets



CODE NO	Icon	Icon
F99-403	1	1
<ul style="list-style-type: none"> F14 PH0x60, PH1x80, PH2x100, PH3x150 mm 		
F99-403P	1	1
<ul style="list-style-type: none"> F17 PZ0x60, PZ1x80, PZ2x100, PZ3x150 mm 		

F99-405

4 Piece C-PLUS Screwdriver Set (Extra Long Shaft) - TORX



CODE NO	Icon	Icon
F99-405	1	1
<ul style="list-style-type: none"> F18 T15x300, T20x300, T25x300, T30x300 mm 		

F99-500 Series

5 Piece C-PLUS Screwdriver Sets



CODE NO	Icon	Icon
F99-501	1	1
<ul style="list-style-type: none"> F10 2.5x75, 4.0x100, 5.5x125 mm F14 PH1x80, PH2x100 mm 		
F99-501P	1	1
<ul style="list-style-type: none"> F10 2.5x75, 4.0x100, 5.5x125 mm F17 PZ1x80, PZ2x100 mm 		

F99-500L Series

5 Piece C-PLUS Screwdriver Sets (Extra Long Shaft) **new**



CODE NO	Icon	Icon
F99-501L	1	1
<ul style="list-style-type: none"> F10 4.0x300, 5.5x300, 6.5x300 mm F14 PH1x300, PH2x300 mm 		
F99-501PL	1	1
<ul style="list-style-type: none"> F10 4.0x300, 5.5x300, 6.5x300 mm F17 PZ1x300, PZ2x300 mm 		

F99-502

5 Piece C-PLUS Screwdriver Set - Slotted



CODE NO	Icon	Icon
F99-502	1	1
<ul style="list-style-type: none"> F10 3.0x75, 4.0x100, 5.5x125, 6.5x150, 8.0x150 mm 		

F99-605

6 Piece C-PLUS Screwdriver Set - TORX



CODE NO	Icon	Icon
F99-605	1	1
<ul style="list-style-type: none"> F18 T10x80, T15x80, T20x100, T25x100, T30x115, T40x130 mm 		



5 Screwdrivers and Bits

F99-606

6 Piece C-PLUS Screwdriver Set - TORX Tamper Proof

 x6





CODE NO		
F99-606		1
 F19	T10x80, T15x80, T20x100, T25x100, T30x115, T40x130 mm	

F20-B05

5 Piece C-PLUS Nut Driver Set

 x5








CODE NO		
F20-B05		1
 F20	6x125, 7x125, 8x125, 10x125, 13x125 mm	

F99-600 Series

6 Piece C-PLUS Screwdriver Sets










CODE NO		
F99-601		1
 F10	3.0x75, 4.0x100, 5.5x125, 6.5x150 mm	
 F14	PH1x80, PH2x100 mm	
F99-602		1
 F10	3.0x75, 4.0x100, 5.5x125, 6.5x150 mm	
 F17	PZ1x80, PZ2x100 mm	

F99-600V Series

7 Piece C-PLUS Screwdriver Sets (with VDE Tester)








CODE NO		
F99-601V		1
 F10	3.0x75, 4.0x100, 5.5x125, 6.5x150 mm	
 F14	PH1x80, PH2x100 mm	
 G09-VT30	Voltage Tester - Short	
F99-602V		1
 F10	3.0x75, 4.0x100, 5.5x125, 6.5x150 mm	
 F17	PZ1x80, PZ2x100 mm	
 G09-VT30	Voltage Tester - Short	

F99-700 Series

7 Piece C-PLUS Screwdriver Sets



CODE NO		
F99-701		1
 F10	3.0x75, 4.0x100, 5.5x125, 6.5x150 mm	
 F14	PH0x60, PH1x80, PH2x100 mm	
F99-702		1
 F10	3.0x75, 4.0x100, 5.5x125, 6.5x150 mm	
 F17	PZ0x60, PZ1x80, PZ2x100 mm	

F99-901






9 Piece C-PLUS Screwdriver Set (in Vinyl Wallet)

 x5

 x2

 x2



















CODE NO		
F99-901		1
 F10	3.0x75, 4.0x100, 5.5x125, 6.5x150 mm	
 F14	PH1x80, PH2x100 mm	
 F17	PZ1x80, PZ2x100 mm	
 G09-VT30	Voltage Tester - Short	

F99-P41

41 Piece C-PLUS Screwdriver Set




CODE NO		
F99-P41		1

 F10	3.0x75, 4.0x100, 5.5x125, 6.5x150, 8.0x150 mm		F26/BT C-PLUS Bit Driver
 F10/TP	6.5x25 mm		BT/02
 F14	PH0x60, PH1x80, PH2x100, PH3x150 mm		CB/610 4.0, 5.5, 6.5 mm
 F14/TP	PH2x25 mm		CB/250 PH1, PH2, PH3
 G09-VT30	Voltage Tester (Short)		CB/350 PZ1 PZ2, PZ3
 H01	1.5x40, 2.0x60, 2.5x80 mm		CB/800 T10, T15, T20, T25, T27, T30, T40
 H02	PH00x60, PH0x60 mm		CB/1800 3, 4, 5, 6 mm
 H04	T6x40, T8x40 mm		

SF99 Series

C-PLUS Screwdriver Set Display Packs



CODE NO		
SF99-601		1
12x F99-601		
SF99-602		1
12x F99-602		
SF99-701		1
12x F99-701		
SF99-702		1
12x F99-702		
SF99-601V		1
12x F99-601V		
SF99-602V		1
12x F99-602V		

F99C-600 Series

6 Piece C-PLUS Screwdriver Sets - (Impact Capped)



● x4

⊕ x2



C-PLUS Impact Screwdrivers

The power screwdrivers suitable for impact use

CODE NO		
F99C-601		1
● F10C	5.5x100, 6.5x125, 8.0x150, 10x175 mm	
⊕ F14C	PH2x100, PH3x150 mm	
F99C-602		1
● F10C	5.5x100, 6.5x125, 8.0x150, 10x175 mm	
⊕ F17C	PZ2x100, PZ3x150 mm	



Metal striking cap which can be hammered



Fully extending hexagonal blade

F10C Series

C-PLUS Slotted Screwdrivers (Impact Capped)

TS ISO 2380-1, DIN ISO 2380-1



* Without Hex bolster

CODE NO	⌀ mm	mm		
F10C-045-100*	4.5	100	-	12
F10C-055-100	5.5	100	10	12
F10C-065-125	6.5	125	11	12
F10C-080-150	8.0	150	13	12
F10C-100-175	10.0	175	13	12
F10C-120-200*	12.0	200	-	12

F14C Series

C-PLUS Phillips Screwdrivers (Impact Capped)

TS 59-5 ISO 8764-1, DIN ISO 8764-1



CODE NO	⊕	mm		
F14C-001-080	PH1	80	10	12
F14C-002-100	PH2	100	11	12
F14C-003-150	PH3	150	13	12

F17C Series

C-PLUS Pozidriv Screwdrivers (Impact Capped)

TS 59-5 ISO 8764-1, DIN ISO 8764-1



CODE NO	⊕	mm		
F17C-001-080	PZ1	80	10	12
F17C-002-100	PZ2	100	11	12
F17C-003-150	PZ3	150	13	12

F99D-600 Series

6 Piece C-PLUS Screwdriver Sets (Diamond Tip)



● x4

⊕ x2



C-PLUS Diamond Tip Screwdrivers

The screwdrivers which bite into the screw

CODE NO		
F99D-601		1
● F10D	3.0x75, 4.0x100, 5.5x125, 6.5x150 mm	
⊕ F14D	PH1x80, PH2x100 mm	
F99D-602		1
● F10D	3.0x75, 4.0x100, 5.5x125, 6.5x150 mm	
⊕ F17D	PZ1x80, PZ2x100 mm	

This range incorporates blades with tiny diamond particles on the tip part. Hence, a very tight connection between the tip and the screw is guaranteed. Slipping off, which can cause problems when working on delicate materials, is therefore avoided.



F10D Series

C-PLUS Slotted Screwdrivers (Diamond Tip)

DIN TS ISO 2380-1



CODE NO	⌀ mm	mm	
F10D-030-075	3.0	75	12
F10D-040-100	4.0	100	12
F10D-055-125	5.5	125	12
F10D-065-150	6.5	150	12
F10D-080-150	8.0	150	12

Stubby Series



F10D-060-025	6.0	25	12
--------------	-----	----	----

F14D Series

C-PLUS Phillips Screwdrivers (Diamond Tip)

DIN ISO 8764-1, TS 59-5



CODE NO	⊕	mm	
F14D-001-080	PH1	80	12
F14D-002-100	PH2	100	12
F14D-003-150	PH3	150	12

Stubby Series



F14D-002-025	PH2	25	12
--------------	-----	----	----

F17D Series

C-PLUS Pozidriv Screwdrivers (Diamond Tip)

DIN ISO 8764-1, TS 59-5



CODE NO	⊕	mm	
F17D-001-080	PZ1	80	12
F17D-002-100	PZ2	100	12
F17D-003-150	PZ3	150	12

Stubby Series



F17D-002-025	PZ2	25	12
--------------	-----	----	----

5 Screwdrivers and Bits

4100M Series / C

TOREX Slotted Screwdrivers (Cabinet Tip)

DIN TS ISO 2380-1, TS 59-1/3/4



CODE NO	mm	mm	
4100/21M	2.5	75	12
4100/31M	3.0	75	12
4100/32M	3.0	100	12
4100/35M	3.5	100	12
4100/41M	4.0	75	12
4100/42M	4.0	100	12
4100/43M	4.0	125	12
4100/44M	4.0	150	12

Stubby Series



4100/TP40M	4.0	25	12
4100/TP55M	5.5	25	12
4100/TP65M	6.5	25	12

4100M Series / W

TOREX Slotted Screwdrivers (Flared Tip)

DIN TS ISO 2380-1, TS 59-1/3/4



CODE NO	mm	mm	
4100/52M	5.5	100	12
4100/53M	5.5	125	12
4100/54M	5.5	150	12
4100/56M	5.5	200	12
4100/62M	6.5	100	12
4100/63M	6.5	125	12
4100/64M	6.5	150	12
4100/66M	6.5	200	12
4100/74M	8.0	150	12
4100/75M	8.0	175	12
4100/86M	10.0	200	12
4100/87M	10.0	250	12
4100/107M	12.0	250	12

4000M/4ST4

4 Piece TOREX Screwdriver Set - Phillips



CODE NO	
4000M/4ST4	1

4200M PH0x60, PH1x80, PH2x100, PH3x150 mm

4200M Series

TOREX Phillips Screwdrivers

DIN ISO 8764-1/2, TS 59-1/5/6



CODE NO		mm	
4200/30M	PH0	60	12
4200/31M	PH0	80	12
4200/51M	PH1	80	12
4200/52M	PH1	100	12
4200/53M	PH1	125	12
4200/56M	PH1	200	12
4200/62M	PH2	100	12
4200/63M	PH2	125	12
4200/64M	PH2	150	12
4200/66M	PH2	200	12
4200/84M	PH3	150	12
4200/106M	PH4	200	12

Stubby Series



4200/TP1M	PH1	25	12
4200/TP2M	PH2	25	12

4300M Series

TOREX Pozidriv Screwdrivers

DIN ISO 8764-1/2, TS 59-1/5/6



CODE NO		mm	
4300/30M	PZ0	60	12
4300/51M	PZ1	80	12
4300/62M	PZ2	100	12
4300/84M	PZ3	150	12

Stubby Series



4300/TP1M	PZ1	25	12
4300/TP2M	PZ2	25	12

4000M/5ST1

5 Piece TOREX Screwdriver Set - Slotted/Phillips



CODE NO	
4000M/5ST1	1

4100M 2.5x75, 4.0x100, 5.5x125 mm
4200M PH1x80, PH2x100 mm

4400M Series

TOREX TORX Screwdrivers



CODE NO		mm	
4400/T10M	T10	80	12
4400/T15M	T15	80	12
4400/T20M	T20	100	12
4400/T25M	T25	100	12
4400/T27M	T27	115	12
4400/T30M	T30	115	12
4400/T40M	T40	130	12

1300M Series

TOREX Nut Drivers

DIN ISO 3125, ISO 2236, TS 3793



CODE NO	mm	mm	
1304M	4	125	12
1305M	5	125	12
1355M	5.5	125	12
1306M	6	125	12
1307M	7	125	12
1308M	8	125	12
1309M	9	125	12
1310M	10	125	12
1311M	11	125	12
1312M	12	125	12
1313M	13	125	12
1314M	14	125	12

4000M/5ST3

5 Piece TOREX Screwdriver Set - Slotted



CODE NO	
4000M/5ST3	1

4100M 3.0x75, 4.0x100, 5.5x125, 6.5x150, 8.0x150 mm

1300M/5ST1

5 Piece TOREX Nut Driver Set



⬡ x5



CODE NO	1
1300M/5ST1	1

- 1300M 6x125, 7x125, 8x125, 10x125, 13x125 mm

4000M/6ST1

6 Piece TOREX Screwdriver Set - Slotted/Phillips



⦿ x4

⊕ x2



CODE NO	1
4000M/6ST1	1

- 4100M 3.0x75, 4.0x100, 5.5x125, 6.5x150 mm
- ⊕ 4200M PH1x80, PH2x100 mm

4000M/6ST2

6 Piece TOREX Screwdriver Set - Slotted/Pozidriv



⦿ x4

⊕ x2



CODE NO	1
4000M/6ST2	1

- 4100M 3.0x75, 4.0x100, 5.5x125, 6.5x150 mm
- ⊕ 4300M PZ1x80, PZ2x100 mm

4400M/6ST1

7 Piece TOREX Screwdriver Set - TORX



⬠ x6



CODE NO	1
4400M/6ST1	1

- 4400M T10x80, T15x80, T20x100, T25x100, T30x115, T40x130 mm

4000M/7ST1

7 Piece TOREX Screwdriver Set - Slotted/Phillips



⦿ x4

⊕ x3



CODE NO	1
4000M/7ST1	1

- 4100M 3.0x75, 4.0x100, 5.5x125, 6.5x150 mm
- ⊕ 4200M PH0x60, PH1x80, PH2x100 mm

4000M/7ST2

7 Piece TOREX Screwdriver Set - Slotted/Pozidriv



⦿ x4

⊕ x3



CODE NO	1
4000M/7ST2	1

- 4100M 3.0x75, 4.0x100, 5.5x125, 6.5x150 mm
- ⊕ 4300M PZ0x60, PZ1x80, PZ2x100 mm

4000M/9ST1

9 Piece TOREX Screwdriver Set (in Vinyl Wallet)



⦿ x5

⊕ x2

⊕ x2

CODE NO	1
4000M/9ST1	1

- 4100M 3.0x75, 4.0x100, 5.5x125, 6.5x150 mm
- ⊕ 4200M PH1x80, PH2x100 mm
- ⊕ 4300M PZ1x80, PZ2x100 mm
- G09-VT30 Voltage Tester (Short)

S4000M/ST Series

TOREX Screwdriver Set Display Packs



CODE NO	1
S4000M/6ST1	1
12x 4000M/6ST1	
S4000M/6ST2	1
12x 4000M/6ST2	
S4000M/7ST1	1
12x 4000M/7ST1	
S4000M/7ST2	1
12x 4000M/7ST2	



Chapter /1 Page 35



5 Screwdrivers and Bits

8000Q/M15 15 Piece Multi-System Set



CODE NO		
8000Q/M15		1
8246Q 4.0/6.0 mm		
8312Q PH1/PH2		
8412Q PZ1/PZ2		
8500Q T15/T20, T25/T30		
8102Q 1/4"x175 mm		

8002QH C-PLUS Telescopic Handle (for Multi-System Blades)



CODE NO			
8002QH	1/4	130	6

8101Q Multi-System Bit Holder (Telescopic)



CODE NO			
8101Q	1/4	175	6

8102Q Multi-System Socket Adaptor (Telescopic)



CODE NO			
8102Q	1/4	175	6

8246Q Multi-System Slotted Combination Blade (Telescopic)

DIN ISO 2380-1



CODE NO			
8246Q	4.0 / 6.0	175	6

8312Q Multi-System Phillips Combination Blade (Telescopic)

DIN ISO 8764-1



CODE NO			
8312Q	PH1 / PH2	175	6

8412Q Multi-System Pozidriv Combination Blade (Telescopic)

DIN ISO 8764-1



CODE NO			
8412Q	PZ1 / PZ2	175	6

8500Q Series Multi-System TORX Combination Blades (Telescopic)



CODE NO			
8515Q	T15 / T20	175	6
8525Q	T25 / T30	175	6

FX-MD Magnetiser / Demagnetiser



CODE NO	HxWxD/mm	
FX-MD	51x49x29	25

3100/TF2 Reversible Screwdriver

DIN ISO 2380-1/2, DIN ISO 8764-1/2



CODE NO			
3100/TF2	PH2 / 6.0	175	12 •

Z Series Offset Slotted Screwdrivers

TS 59-2/1-2



CODE NO			
Z/40	4.0	100	12 •
Z/55	5.5	125	12 •

Z/12 Offset Phillips Screwdriver

TS 59-2/1-2



CODE NO			
Z/12	PH1 x PH2	100	12 •

Impact Driver Bits

Observing the trend towards impact screwdriving machines, Ceta Form has launched a special bit and bit holder range. This range delivers when the ultimate durability is required.

1/4"



Performance Chart

Impact use

System	Life Time

The best performance even with the strongest machines.

CB/250TM Series

Phillips Insert Bits (Impact Grade)



CODE NO	+	mm	
CB/251TM	PH1	25	12•
CB/252TM	PH2	25	12•
CB/253TM	PH3	25	12•

CB/350TM Series

Pozidriv Insert Bits (Impact Grade)



CODE NO	+	mm	
CB/351TM	PZ1	25	12•
CB/352TM	PZ2	25	12•
CB/353TM	PZ3	25	12•

CB/800TM Series

TORX Insert Bits (Impact Grade)



CODE NO		mm	
CB/806TM	T10	25	12•
CB/807TM	T15	25	12•
CB/808TM	T20	25	12•
CB/809TM	T25	25	12•
CB/810TM	T27	25	12•
CB/811TM	T30	25	12•
CB/812TM	T40	25	12•

CB/490TM Series

Phillips Power Bits (Impact Grade)



CODE NO	+	mm	
CB/491TM	PH1	50	12•
CB/492TM	PH2	50	12•
CB/493TM	PH3	50	12•

CB/490TM Series - XL

Phillips Power Bits (Impact Grade)- Extra Long



CODE NO	+	mm	
CB/702TM	PH2	70	12•
CB/902TM	PH2	90	12•
CB/1502TM	PH2	150	12•

CB/590TM Series

Pozidriv Power Bits (Impact Grade)



CODE NO	+	mm	
CB/591TM	PZ1	50	12•
CB/592TM	PZ2	50	12•
CB/593TM	PZ3	50	12•

CB/590TM Series - XL

Pozidriv Power Bits (Impact Grade)- Extra Long



CODE NO	+	mm	
CB/712TM	PZ2	70	12•
CB/912TM	PZ2	90	12•
CB/1512TM	PZ2	150	12•

CB/820TM Series

TORX Power Bits (Impact Grade)



CODE NO		mm	
CB/824TM	T10	50	12•
CB/825TM	T15	50	12•
CB/826TM	T20	50	12•
CB/827TM	T25	50	12•
CB/828TM	T27	50	12•
CB/829TM	T30	50	12•
CB/830TM	T40	50	12•

BT/700TMS3

3 Piece Impact Socket Adaptor Set



CODE NO	
BT/700TMS3	10
BT/7015TM	1/4" Sq.-1/4" H. x 65 mm
BT/7030TM	1/2" Sq.-1/4" H. x 70 mm
BT/7020TM	3/8" Sq.-1/4" H. x 65 mm

BT/65 - TM Series

Magnetic Nut Setters (Impact Grade)

DIN 3126-E.6.3, ISO 1173



CODE NO	mm	mm	
BT/0865TM	8	65	10•
BT/1065TM	10	65	6•
BT/1365TM	13	65	6•

BT/01TM

Magnetic Bit Holder (Impact Grade)



CODE NO	mm	mm	
BT/01TM	1/4	68	6

BT/02TM

1/4" Magnetic Bit Holder (Impact Grade)



CODE NO	mm	mm	
BT/02TM	1/4	60	6•

5 Screwdrivers and Bits

BT/8000QR Series Impact Bit Holder Sockets

DIN 3126-E 6.3, ISO 1173



CODE NO	⌀"	□"	mm	Icons
BT/8001QR	1/4	1/4	50	6•
BT/8003QR	1/4	3/8	50	6•
BT/8006QR	1/4	1/2	50	6•

CB/ST25TM1 25 Piece Impact Bits Set

new



CODE NO	Icons
CB/ST25TM1	6

- CB/610TM 4, 5, 6 mm
- CB/1800TM 3, 4, 5, 6 mm
- ⊕ CB/250TM PH1, PH2, PH3
- ⊕ CB/250TM 2x PH2
- ⊕ CB/350TM PZ1, PZ2, PZ3
- ⊕ CB/350TM 2x PZ2
- ⊕ CB/800TC T10, T15, T20, T25, T27, T30, T40
- BT/02TM

CB/ST25TM2 25 Piece Impact Bit and Nut Setter Set

new



CODE NO	Icons
CB/ST25TM2	6

- ⊕ CB/250TM PH1, PH2, PH3
- ⊕ CB/490TM PH1, PH2, PH3
- ⊕ CB/350TM PZ1, PZ2, PZ3
- ⊕ CB/590TM PZ1, PZ2, PZ3
- CB/1800TM 3, 4, 5, 6 mm
- ⊕ CB/820TM T10, T15, T20, T25, T30
- BT/7015TM 1/4" Sq.-1/4" H.x.65 mm
- BT/65-TM 8, 10 mm
- BT/02TM

Color Coded 1/4" Torsion Bits

Phillips ⊕

Pozidriv ⊕

Slotted —

TORX ⬠

Hexagon ⬡

Color coding for easy identification of the needed tip profile

CB/250TC Series Phillips Bits (Color Coded)



CODE NO	⊕	mm	Icons
CB/251TC	PH1	25	12•
CB/252TC	PH2	25	12•
CB/253TC	PH3	25	12•

CB/350TC Series Pozidriv Bits (Color Coded)



CODE NO	⊕	mm	Icons
CB/351TC	PZ1	25	12•
CB/352TC	PZ2	25	12•
CB/353TC	PZ3	25	12•

CB/600TC Series Slotted Bits (Color Coded)



CODE NO	⌀mm	mm	Icons
CB/611TC	4.0	25	12•
CB/612TC	5.5	25	12•
CB/613TC	6.5	25	12•

CB/800TC Series TORX Bits (Color Coded)



CODE NO	⬠	mm	Icons
CB/806TC	T10	25	12•
CB/807TC	T15	25	12•
CB/808TC	T20	25	12•
CB/809TC	T25	25	12•
CB/811TC	T30	25	12•
CB/812TC	T40	25	12•

CB/1800TC Series Hexagon Bits (Color Coded)



CODE NO	⌀mm	mm	Icons
CB/1815TC	1.5	25	12•
CB/1820TC	2	25	12•
CB/1825TC	2.5	25	12•
CB/1830TC	3	25	12•
CB/1840TC	4	25	12•
CB/1850TC	5	25	12•
CB/1860TC	6	25	12•

CB/490TC Series Phillips Bits (Color Coded)



CODE NO	⊕	mm	Icons
CB/491TC	PH1	50	12•
CB/492TC	PH2	50	12•
CB/493TC	PH3	50	12•

CB/590TC Series Pozidriv Bits (Color Coded)



CODE NO	⊕	mm	Icons
CB/591TC	PZ1	50	12•
CB/592TC	PZ2	50	12•
CB/593TC	PZ3	50	12•

CB/ST31TC 31 Piece Bit Set (Color Coded)



CODE NO	Icons
CB/ST31TC	6

- CB/610TC 4.0, 5.5, 6.5 mm
- ⬠ CB/800TC T10, T15, 2xT20, T25, 2xT30, T40
- ⊕ CB/250TC 2xPH1, 3xPH2, PH3
- CB/1800TC 1.5, 2, 2.5, 3, 4, 5, 6 mm
- ⊕ CB/350TC 2xPZ1, 3xPZ2, PZ3
- BT/02

CB/250 Series

Phillips Bits

DIN ISO 8764-1, TS 8748-2, DIN 3126-C 6.3, ISO 1173



CODE NO	+	mm	
CB/250	PH0	25	12 •
CB/251	PH1	25	12 •
CB/252	PH2	25	12 •
CB/253	PH3	25	12 •
CB/254	PH4	32	12 •

CB/252D

Phillips Bit Saver Pack (PH2) - 240 Pieces

BUY MORE
PAY LESS



CODE NO		
CB/252D		1
240x CB/252 (PH2)		

CB/250X Series

Phillips Bits (Display Packed)



The code represents a 3 piece package

CODE NO	+	mm	
CB/251X	PH1	25	50 pk.
CB/252X	PH2	25	50 pk.
CB/253X	PH3	25	50 pk.

CB/252DB

Drywall Phillips Screw Setter

DIN ISO 8764-1, TS 8748-2, DIN 3126-C 6.3, ISO 1173



CODE NO	+	mm	
CB/252DB	PH2	25	12 •

CB/250B Series

Phillips Bits (in 50 pc. Packs)



ECO
PACK



CODE NO	+	mm	
CB/251B	PH1	25	50 •
CB/252B	PH2	25	50 •
CB/253B	PH3	25	50 •

CB/252BD

Phillips Bit Saver Pack (PH2) - 500 Pieces

BUY MORE
PAY LESS



CODE NO		
CB/252BD		1
500x CB/252B (PH2)		

CB/262

Phillips Bit (Reduced Diameter)

DIN ISO 8764-1, TS 8748-2, DIN 3126-C 6.3, ISO 1173



CODE NO	+	mm	
CB/262	PH2	25	12 •

CB/350 Series

Pozidriv Bits

DIN ISO 8764-1, TS 8748-2, DIN 3126-C 6.3, ISO 1173



CODE NO	+	mm	
CB/350	PZ0	25	12 •
CB/351	PZ1	25	12 •
CB/352	PZ2	25	12 •
CB/353	PZ3	25	12 •
CB/354	PZ4	32	12 •

CB/352D

Pozidriv Bit Saver Pack (PZ2) - 240 Pieces

BUY MORE
PAY LESS



CODE NO		
CB/352D		1
240x CB/352 (PZ2)		

CB/350X Series

Pozidriv Bits (Display Packed)



The code represents a 3 piece package

CODE NO	+	mm	
CB/351X	PZ1	25	50 pk.
CB/352X	PZ2	25	50 pk.
CB/353X	PZ3	25	50 pk.

5 Screwdrivers and Bits

CB/350B Series

Pozidriv Bits (in 50 pc. Packs)



**ECO
PACK**



CODE NO	+	mm	
CB/351B	PZ1	25	50 •
CB/352B	PZ2	25	50 •
CB/353B	PZ3	25	50 •

CB/352BD

Pozidriv Bit Saver Pack (PZ2) - 500 Pieces

**BUY MORE
PAY LESS**



CODE NO	
CB/352BD	1
500x CB/352B (PZ2)	

CB/610 Series

Slotted Bits

DIN 5264-C, ISO 2380, TS 8748-1, DIN 3126-C 6.3, ISO 1173



CODE NO	mm	mm	
CB/610	3.0	25	12 •
CB/611	4.0	25	12 •
CB/612	5.5	25	12 •
CB/613	6.5	25	12 •

CB/660 Series

Double Ended Insert Bits

DIN 3126, ISO 1173



CODE NO	SIZE	TIP	mm	
CB/660P1S4	PH1 / 4.0	+	30	12 •
CB/660P2S5	PH2 / 5.0	+	30	12 •
CB/660Z1H4	PZ1 / 4.0	+	30	12 •
CB/660Z2H5	PZ2 / 5.0	+	30	12 •
CB/660S6H6	6.0 / 6.0	+	30	12 •
CB/660T2T3	T20 / T30	+	30	12 •

CB/800 Series

TORX Bits

DIN 3126-C 6.3, ISO 1173



CODE NO		mm	
CB/801	T05	25	12 •
CB/802	T06	25	12 •
CB/803	T07	25	12 •
CB/804	T08	25	12 •
CB/805	T09	25	12 •
CB/806	T10	25	12 •
CB/807	T15	25	12 •
CB/808	T20	25	12 •
CB/809	T25	25	12 •
CB/810	T27	25	12 •
CB/811	T30	25	12 •
CB/812	T40	25	12 •
CB/813	T45	35	12 •
CB/814	T50	35	12 •

CB/800X Series

TORX Bits (Display Packed)



The code represents a 3 piece package

CODE NO	+	mm	
CB/806X	T10	25	50 pk.
CB/807X	T15	25	50 pk.
CB/808X	T20	25	50 pk.
CB/809X	T25	25	50 pk.
CB/811X	T30	25	50 pk.
CB/812X	T40	25	50 pk.

CB/800T Series

TORX Tamper Proof Bits

DIN 3126-C 6.3, ISO 1173



CODE NO		mm	
CB/806T	T10	25	12 •
CB/807T	T15	25	12 •
CB/808T	T20	25	12 •
CB/809T	T25	25	12 •
CB/810T	T27	25	12 •
CB/811T	T30	25	12 •
CB/812T	T40	25	12 •

CB/800B Series

TORX Bits (in 50 pc. Packs)



**ECO
PACK**



CODE NO		mm	
CB/808B	T20	25	50 •
CB/809B	T25	25	50 •
CB/811B	T30	25	50 •

CB/800BD Series

TORX Bit Saver Packs - 500 Pieces

**BUY MORE
PAY LESS**



CODE NO	
CB/808BD	1
500x CB/808B (T20)	
CB/809BD	1
500x CB/809B (T25)	
CB/811BD	1
500x CB/811B (T30)	

CB/800IP Series

TORX PLUS Bits

DIN 3126-C 6.3, ISO 1173



CODE NO		mm	
CB/806IP	IP10	25	12 •
CB/807IP	IP15	25	12 •
CB/808IP	IP20	25	12 •
CB/809IP	IP25	25	12 •
CB/810IP	IP27	25	12 •
CB/811IP	IP30	25	12 •
CB/812IP	IP40	25	12 •

CB/800IPR Series

TORX IPR Bits

DIN 3126-C 6.3, ISO 1173



CODE NO		mm	
CB/806IPR	IPR10	25	12 •
CB/807IPR	IPR15	25	12 •
CB/808IPR	IPR20	25	12 •
CB/809IPR	IPR25	25	12 •
CB/810IPR	IPR27	25	12 •
CB/811IPR	IPR30	25	12 •
CB/812IPR	IPR40	25	12 •

CB/840 Series

Square Bits

DIN 3126-C 6.3, ISO 1173



CODE NO		mm	
CB/841	No.1	25	12•
CB/842	No.2	25	12•
CB/843	No.3	25	12•

CB/850 Series

XZN (Spline) Bits

DIN 3126-C 6.3, ISO 1173



CODE NO		mm	
CB/854	M4	25	12•
CB/855	M5	25	12•
CB/856	M6	25	12•
CB/858	M8	25	6•

CB/SP Series

Spanner Bits

DIN 3126-C 6.3, ISO 1173



CODE NO		mm	
CB/SP04	4	25	12•
CB/SP06	6	25	12•
CB/SP08	8	25	12•
CB/SP10	10	25	12•

CB/1800 Series

Hexagon Bits

TS ISO 2936, DIN 3126-C 6.3, ISO 1173



CODE NO		mm	
CB/1815	1.5	25	12•
CB/1820	2	25	12•
CB/1825	2.5	25	12•
CB/1830	3	25	12•
CB/1840	4	25	12•
CB/1850	5	25	12•
CB/1860	6	25	12•
CB/1880	8	25	6•
CB/1810	10	25	6•

CB/1800 Series - SAE

Hexagon Bits - SAE

DIN 3126-C 6.3, ISO 1173



CODE NO		mm	
CB/180332	3/32	25	12•
CB/180108	1/8	25	12•
CB/180964	9/64	25	12•
CB/180532	5/32	25	12•
CB/180316	3/16	25	12•
CB/180732	7/32	25	12•
CB/180104	1/4	25	12•

CB/SVB25

Schrader® Valve Core Tool Bit

DIN 3126-C 6.3, ISO 1173



CODE NO		mm	
CB/SVB25	4	25	12•



AEROSPACE BITS



CB/870 Series

TRI-WING Bits (25 mm)

DIN 3126-C 6.3, ISO 1173



CODE NO		mm	
CB/871	TW1	25	12•
CB/872	TW2	25	12•
CB/873	TW3	25	12•
CB/874	TW4	25	12•
CB/875	TW5	25	12•

CB/860 Series

TORQ-SET Insert Bits (25 mm)

DIN 3126-C 6.3, ISO 1173



CODE NO		mm	
CB/860	No.0	25	12•
CB/861	No.1	25	12•
CB/862	No.2	25	12•
CB/863	No.3	25	12•
CB/864	No.4	25	12•
CB/865	No.5	25	12•
CB/866	No.6	25	12•
CB/867	No.8	25	12•
CB/868	No.10	25	12•
CB/869	1/4"	25	12•

CB/860510

TORQ-SET Power Bits (50 mm)

DIN 3126-E 6.3, ISO 1173



CODE NO		mm	
CB/860510	No.10	50	12•

CB/8603 Series

TORQ-SET Power Bits (32 mm)

DIN 3126-E 6.3, ISO 1173



CODE NO		mm	
CB/860300	No.0	32	12•
CB/860301	No.1	32	12•
CB/860302	No.2	32	12•
CB/860303	No.3	32	12•
CB/860304	No.4	32	12•
CB/860305	No.5	32	12•
CB/860306	No.6	32	12•
CB/860308	No.8	32	12•
CB/860310	No.10	32	12•
CB/860314	1/4"	32	6•

CB/8613 Series

5/16" TORQ-SET Power Bits (32 mm)

DIN 3126-E 8, ISO 1173



CODE NO		mm	
CB/861314	1/4"	32	6•
CB/861351	5/16"	32	6•

5 Screwdrivers and Bits

CB/490 Series

Phillips Bits

DIN ISO 8764-1, TS 8748-2, DIN 3126-E 6.3, ISO 1173



CODE NO	+	mm	
CB/491	PH1	50	12•
CB/492	PH2	50	12•
CB/493	PH3	50	12•

CB/492D

Phillips Bit Saver Pack (PH2) - 240 Pieces

**BUY MORE
PAY LESS**



CODE NO	
CB/492D	1
240x CB/492 (PH2)	

CB/490X Series

Phillips Bits (Display Packed)



The code represents a 3 piece package

CODE NO	+	mm	
CB/491X	PH1	50	50 pk.
CB/492X	PH2	50	50 pk.
CB/493X	PH3	50	50 pk.

CB/662TM

Double Ended Phillips Bits (Torsion)

DIN 5264-C, DIN ISO 8764



CODE NO	+	mm	
CB/662TM	PH2 / PH2	65	12•

CB/490B Series

Phillips Bits (in 50 pc. Packs)



CODE NO	+	mm	
CB/491B	PH1	50	50•
CB/492B	PH2	50	50•
CB/493B	PH3	50	50•

CB/492BD

Phillips Bit Saver Pack (PH2) - 500 Pieces

**BUY MORE
PAY LESS**



CODE NO	
CB/492BD	1
500x CB/492B (PH2)	

CB/XL Series - PH

Phillips Bits - Extra Long

DIN ISO 8764-1, TS 8748-2

DIN 3126-E 6.3, ISO 1173



CODE NO	+	mm	
CB/701	PH1	70	12•
CB/702	PH2	70	12•
CB/703	PH3	70	12•
CB/901	PH1	90	12•
CB/902	PH2	90	12•
CB/903	PH3	90	12•
CB/1101	PH1	110	12•
CB/1102	PH2	110	12•
CB/1103	PH3	110	12•
CB/1271	PH1	127	10•
CB/1272	PH2	127	10•
CB/1273	PH3	127	10•
CB/1521	PH1	150	10•
CB/1522	PH2	150	10•
CB/1523	PH3	150	10•
CB/2022	PH2	200	10•

CB/590 Series

Pozidriv Bits

DIN ISO 8764-1, TS 8748-2, DIN 3126-E 6.3, ISO 1173



CODE NO	+	mm	
CB/591	PZ1	50	12•
CB/592	PZ2	50	12•
CB/593	PZ3	50	12•

CB/592D

Pozidriv Bit Saver Pack (PZ2) - 240 Pieces

**BUY MORE
PAY LESS**



CODE NO	
CB/592D	1
240x CB/592 (PZ2)	

CB/590X Series

Pozidriv Bits (Display Packed)



The code represents a 3 piece package

CODE NO	+	mm	
CB/591X	PZ1	50	50 pk.
CB/592X	PZ2	50	50 pk.
CB/593X	PZ3	50	50 pk.

CB/590B Series

Pozidriv Bits (in 50 pc. Packs)

ECO PACK



CODE NO	+	mm	
CB/591B	PZ1	50	50 •
CB/592B	PZ2	50	50 •
CB/593B	PZ3	50	50 •

CB/592BD

Pozidriv Bit Saver Pack (PZ2) - 500 Pieces

BUY MORE PAY LESS



CODE NO	
CB/592BD	1
500x CB/592B (PZ2)	

CB/XL Series - PZ

Pozidriv Bits - Extra Long

DIN ISO 8764-1, TS 8748-2, DIN 3126-E 6.3, ISO 1173



CODE NO	+	mm	
CB/711	PZ1	70	12 •
CB/712	PZ2	70	12 •
CB/713	PZ3	70	12 •
CB/911	PZ1	90	12 •
CB/912	PZ2	90	12 •
CB/913	PZ3	90	12 •

CB/820 Series

TORX Bits

DIN 3126-E 6.3, ISO 1173



CODE NO	*	mm	
CB/820	T06	50	12 •
CB/821	T07	50	12 •
CB/822	T08	50	12 •
CB/823	T09	50	12 •
CB/824	T10	50	12 •
CB/825	T15	50	12 •
CB/826	T20	50	12 •
CB/827	T25	50	12 •
CB/828	T27	50	12 •
CB/829	T30	50	12 •
CB/830	T40	50	12 •

CB/820X Series

TORX Bits (Display Packed)



The code represents a 3 piece package

CODE NO	*	mm	
CB/824X	T10	50	50 pk.
CB/825X	T15	50	50 pk.
CB/826X	T20	50	50 pk.
CB/827X	T25	50	50 pk.
CB/829X	T30	50	50 pk.
CB/830X	T40	50	50 pk.

CB/XL Series - TORX

TORX Bits - Extra Long

DIN 3126-E 6.3, ISO 1173



CODE NO	*	mm	
CB/8094	T10	90	12 •
CB/8095	T15	90	12 •
CB/8096	T20	90	12 •
CB/8097	T25	90	12 •
CB/8099	T30	90	12 •
CB/8156	T20	150	10 •
CB/8157	T25	150	10 •
CB/8159	T30	150	10 •

CB/820B Series

TORX Bits (in 50 pc. Packs)

ECO PACK



CODE NO	*	mm	
CB/826B	T20	50	50 •
CB/827B	T25	50	50 •
CB/829B	T30	50	50 •

CB/820BD Series

TORX Bit Saver Packs - 500 Pieces

BUY MORE PAY LESS



CODE NO	
CB/826BD	1
500x CB/826B (T20)	
CB/827BD	1
500x CB/827B (T25)	
CB/829BD	1
500x CB/829B (T30)	

CB/600 Series

Slotted Bits

DIN 5264-C, ISO 2380, TS 8748-1, DIN 3126-E 6.3, ISO 1173



CODE NO	mm	mm	
CB/619	3.0	50	12 •
CB/620	4.0	50	12 •
CB/621	5.5	50	12 •
CB/622	6.5	50	12 •

5 Screwdrivers and Bits

CB/1900 Series

Hexagon Bits

TS ISO 2936, DIN 3126-E 6.3, ISO 1173



CODE NO	mm	mm	
CB/1915	1.5	50	12 •
CB/1920	2	50	12 •
CB/1925	2.5	50	12 •
CB/1930	3	50	12 •
CB/1940	4	50	12 •
CB/1950	5	50	12 •
CB/1960	6	50	12 •
CB/1980	8	50	6 •

CB/1900 Series - SAE

Hexagon Bits - SAE

TS ISO 2936, DIN 3126-E 6.3, ISO 1173



CODE NO	"	mm	
CB/190332	3/32	50	12 •
CB/190532	5/32	50	12 •
CB/190316	3/16	50	12 •

CB/8800 Series

Nut Setters (Magnetic)

DIN 5264-C, ISO 2380, DIN 3126-C 6.3, ISO 1173



CODE NO	mm	mm	
CB/8806	6	33	12 •
CB/8807	7	33	12 •

BT/42 Series

Nut Setters (Magnetic) - 45 mm

DIN 3126-E 6.3, ISO 1173



CODE NO	mm	mm	
BT/0642	6	42	12 •
BT/0742	7	42	12 •
BT/0842	8	42	12 •
BT/1045	10	45	12 •
			12

For display carded delivery = Item code + X
Available for BT/0842, BT/1045

BTA/42 Series

Nut Setters (Magnetic) - SAE

DIN 5264-C, ISO 2380, DIN 3126-E 6.3, ISO 1173



CODE NO	"	mm	
BTA/051642	5/16	42	6 •
BTA/010245	1/2	45	6 •

BT/65 Series

Nut Setters (Magnetic) - 65 mm

DIN 3126-E 6.3, ISO 1173



CODE NO	mm	mm	
BT/0665	6	65	12 •
BT/0765	7	65	10 •
BT/0865	8	65	10 •
BT/1065	10	65	8 •
BT/1165	11	65	4 •
BT/1265	12	65	4 •
BT/1365	13	65	4 •
BT/1465	14	65	4 •
BT/1765	17	65	3 •
			12

For display carded delivery = Item code + X

BT/ST061

6 Piece Nut Setter Set - 65 mm



CODE NO	
BT/ST061	6

BT/65 6PC 6, 7, 8, 10, 12, 13 mm

BT/80 Series

Deep Nut Setters

DIN 3126-E 6.3, ISO 1173

new



CODE NO	mm	mm	
BT/0680	6	80	6 •
BT/0780	7	80	6 •
BT/0880	8	80	6 •
BT/1080	10	80	6 •
BT/1380	13	80	6 •
BT/1780	17	80	6 •



CB4/EST36

36 Piece Cordless Precision Driver Set - 4 mm

new



CODE NO	1
CB4/EST36	1

- CB/PH - H4 PH000, PH00, PH0, PH1, PH2
- CB/SL - H4 1.5, 2.0, 3.0, 4.0 mm
- CB/TH - H4 T5, T6, T8, T10, T15
- CB/HX - H4 1.5, 2.0, 3.0, 4.0 mm
- CB/TR - H4 2.3
- CB/TY - H4 0.6, 1.0, 2.5
- CB/PL - H4 P2, P5, P6
- CB/TX - H4 T2, T3, T4
- CB/SP - H4 2.6
- CB/W - H4 2.5



Rechargeable Bits Screwdriver



Multi crowbar



0,5 m charging cable



Magnetiser

- LED FILL LIGHT
- MAGNETIC BASE AND BACK
- 1 HOURS RUNTIME
- MANUAL & ELECTRIC SWITCH
- USB Type C

CB4D/ST25

25 in 1 Precision Screwdriver Bit Set (Double End Bits) - 4 mm

new



CODE NO	1
CB4D/ST25	1

- 4 mm Bit Holder
- CB/PH - H4 PH000, PH00, PH0, PH1
- CB/SL - H4 1.0, 2.5, 1.5, 3.5 mm
- CB/TH - H4 T5, T6, T7, T8
- CB/HX - H4 0.7, 4.0, 0.9, 3.5 mm
- CB/PL - H4 P0.8, P1.2
- CB/TY - H4 0.6, 2.5, 1.5, 3.0
- CB/TR - H4 2.0, 3.0

CB4/ST51

51 Piece Precision Screwdriver Bit Set - 4 mm

new



CODE NO	1
CB4/ST51	1

- 4 mm Bit Holder
- CB/PH - H4 PH000, PH00, PH0, PH1
- CB/SL - H4 1.0, 1.5, 2.0, 2.5, 3.0, 3.5, 4.0 mm
- CB/TX - H4 T2, T3, T4
- CB/TH - H4 T5, T6, T7, T8, T9, T10, T15, T20
- CB/HX - H4 0.7, 0.9, 1.3, 1.5, 2.0, 2.5, 3.0, 3.5, 4.0 mm
- CB/PL - H4 P2, P5, P6
- CB/TY - H4 0.6, 1.0, 2.0, 2.5
- CB/TR - H4 2.0, 2.3, 3.0
- CB/SP - H4 2.6, 3.0
- CB/SIM - H4 0.8
- CB/MID - H4 2.5
- CB/SQ - H4 S0, S1, S2
- x2 Box integrated magnetiser and demagnetiser

CB4/ST25

25 Piece Precision Screwdriver Bit Set



CODE NO	1
CB4/ST25	1

- F26A/BT4
- CB/PH - H4 PH000, PH00, PH0, PH1, PH2
- CB/SL - H4 1.5, 2.0, 3.0, 4.0 mm
- CB/TX - H4 T2, T3, T4
- CB/TH - H4 T5, T6, T8, T10, T15
- CB/HX - H4 1.5, 2.0 mm
- CB/PL - H4 P2, P5
- CB/TY - H4 1.0
- CB/TR - H4 2.3
- CB/SP - H4 2.6

F26A/BT4

Bit Driver (Aluminum)



CODE NO	4	125	12
F26A/BT4	4	125	12

CB/PH - H4 Series

Phillips Precision Bits

DIN ISO 8764-1, TS 8748-2, DIN 3126-C 4, ISO 1173



CODE NO	+	mm	12
CB/PH30H4	PH000	28	12
CB/PH20H4	PH00	28	12
CB/PH10H4	PH0	28	12
CB/PH01H4	PH1	28	12
CB/PH02H4	PH2	28	12

CB/SL - H4 Series

Slotted Precision Bits

DIN 5264-C, ISO 2380, TS 8748-1, DIN 3126-C 4, ISO 1173



CODE NO	mm	mm	12
CB/SL10H4	1.0	28	12
CB/SL15H4	1.5	28	12
CB/SL20H4	2.0	28	12
CB/SL25H4	2.5	28	12
CB/SL30H4	3.0	28	12
CB/SL35H4	3.5	28	12
CB/SL40H4	4.0	28	12

5 Screwdrivers and Bits

CB/HX - H4 Series

Hexagon Precision Bits

TS ISO 2936, DIN 3126-C 4, ISO 1173



CODE NO		mm	
CB/HX07H4	0.7	28	50
CB/HX09H4	0.9	28	50
CB/HX13H4	1.3	28	50
CB/HX15H4	1.5	28	50
CB/HX20H4	2.0	28	50
CB/HX25H4	2.5	28	50
CB/HX30H4	3.0	28	50
CB/HX40H4	4.0	28	50

CB/TH - H4 Series

TORX Tamper Proof Precision Bits

DIN 3126-C 4, ISO 1173



CODE NO		mm	
CB/TH05H4	T5	28	12
CB/TH06H4	T6	28	12
CB/TH07H4	T7	28	12
CB/TH08H4	T8	28	12
CB/TH09H4	T9	28	12
CB/TH10H4	T10	28	12
CB/TH15H4	T15	28	12
CB/TH20H4	T20	28	12

F28-P12

12 Piece Impact Bit Driver Set



CODE NO	
F28-P12	1



CB/516PH PH2, PH3, PH4

CB/516HX 5, 6, 8 mm



F28/BT 5/16" Impact Bit Driver

F28/BT

5/16" Impact Bit Driver



CODE NO	mm	
F28/BT	160	1

CB/TX - H4 Series

TORX Precision Bits

DIN 3126-C 4, ISO 1173



CODE NO		mm	
CB/TX02H4	T2	28	12
CB/TX03H4	T3	28	12
CB/TX04H4	T4	28	12

CB/PL - H4 Series

Pentalobe Precision Bits

DIN 3126-C 4, ISO 1173



CODE NO		mm	
CB/PL02H4	P2	28	12
CB/PL05H4	P5	28	12
CB/PL06H4	P6	28	12

CB/SP - H4 Series

Spanner Precision Bits

DIN 3126-C 4, ISO 1173




CODE NO		mm	
CB/SP06H4	2.6	28	12
CB/SP08H4	3.0	28	12

CB/516SL Series

Slotted Bits (Impact Grade)

DIN 5264-C, ISO 2380, DIN 3126-C8, ISO 1173



CODE NO	mm	mm	
CB/516SL08	8	30	12
CB/516SL10	10	30	6
CB/516SL12	12	30	6

CB/516HX Series

Hexagon Bits (Impact Grade)

TS ISO 2936, DIN 3126-C8, ISO 1173



CODE NO	mm	mm	
CB/516HX05	5	30	12
CB/516HX06	6	30	12
CB/516HX07	7	30	12
CB/516HX08	8	30	12
CB/516HX10	10	30	6
CB/516HX12	12	30	6
CB/516HX14	14	30	6

CB/TY - H4 Series

Tri Point Type Precision Bits

DIN 3126-C 4, ISO 1173



CODE NO		mm	
CB/TY30H4	0.6	28	12
CB/TY20H4	1.0	28	12
CB/TY10H4	2.0	28	12
CB/TY01H4	2.5	28	12

CB/TR - H4 Series

Triangle Precision Bits

DIN 3126-C 4, ISO 1173



CODE NO		mm	
CB/TR20H4	2.0	28	12
CB/TR23H4	2.3	28	12
CB/TR30H4	3.0	28	12

CB/516PH Series

Phillips Bits (Impact Grade)

DIN ISO 8764-1, DIN 3126-C8, ISO 1173



CODE NO		mm	
CB/516PH2	PH2	30	12
CB/516PH3	PH3	30	12
CB/516PH4	PH4	30	12

CB/516PZ Series

Pozidriv Bits (Impact Grade)

DIN ISO 8764-1, DIN 3126-C8, ISO 1173



CODE NO		mm	
CB/516PZ2	PZ2	30	12
CB/516PZ3	PZ3	30	12
CB/516PZ4	PZ4	30	12

CB/516TX Series

TORX Bits (Impact Grade)

DIN 3126-C8, ISO 1173



CODE NO		mm	
CB/516TX20	T20	30	12
CB/516TX25	T25	30	12
CB/516TX30	T30	30	12
CB/516TX40	T40	30	12
CB/516TX45	T45	30	12
CB/516TX50	T50	30	12
CB/516TX55	T55	30	6

CB/1000G Series

TORX Bits - Short



CODE NO		mm	
CB/1020G	T20	30	12•
CB/1025G	T25	30	12•
CB/1027G	T27	30	12•
CB/1030G	T30	30	12•
CB/1040G	T40	30	12•
CB/1045G	T45	30	12•
CB/1050G	T50	30	12•
CB/1055G	T55	30	12•

CB/1100G Series

TORX Bits - Long



CODE NO		mm	
CB/1120G	T20	75	10•
CB/1125G	T25	75	10•
CB/1127G	T27	75	10•
CB/1130G	T30	75	10•
CB/1140G	T40	75	10•
CB/1145G	T45	75	10•
CB/1150G	T50	75	10•
CB/1155G	T55	75	10•

CB/PH2M5

Phillips Bit (for Stationary Screw Systems)

DIN ISO 8764-1, TS 8748-2



CODE NO		mm	
CB/PH2M5	PH2	45	12•

BT/7000 Series - M

Socket Adaptors (for Manual Use)

DIN 3126-C6.3, ISO 1173



CODE NO	"	mm	
BT/7010	1/4 - 1/4	25	12•
BT/7017M*	1/4 - 1/4	75	12•
BT/7027*	3/8 - 1/4	75	6•
BT/7028*	3/8 - 1/4	100	6•

* Limited with stock

CB/2000G Series

Hexagon Bits - Short

TS ISO 2936



CODE NO	mm	mm	
CB/2004G	4	30	12•
CB/2005G	5	30	12•
CB/2006G	6	30	12•
CB/2007G	7	30	12•
CB/2008G	8	30	12•
CB/2010G	10	30	12•
CB/2012G	12	30	12•

CB/2100G Series

Hexagon Bits - Long

TS ISO 2936



CODE NO	mm	mm	
CB/2104G	4	75	10•
CB/2105G	5	75	10•
CB/2106G	6	75	10•
CB/2107G	7	75	10•
CB/2108G	8	75	10•
CB/2110G	10	75	10•
CB/2112G	12	75	6•

CB/PZ2M5

Pozidriv Bit (for Stationary Screw Systems)

DIN ISO 8764-1, TS 8748-2



CODE NO		mm	
CB/PZ2M5	PZ2	45	6•

BT/7000 Series - P

Socket Adaptors (for Power Use)

DIN 3126-E6.3, ISO 1173



CODE NO	"	mm	
BT/7015	1/4 1/4	50	12•
BT/7018	1/4 1/4	100	12•
BT/7020	3/8 1/4	50	6•
BT/7030	1/2 1/4	50	6•

CB/3000G Series

XZN (Spline) Bits - Short



CODE NO		mm	
CB/3005G	M05	30	12•
CB/3006G	M06	30	12•
CB/3008G	M08	30	12•
CB/3010G	M10	30	12•
CB/3012G	M12	30	12•

CB/3100G Series

XZN (Spline) Bits - Long



CODE NO		mm	
CB/3105G	M05	75	10•
CB/3106G	M06	75	10•
CB/3108G	M08	75	10•
CB/3110G	M10	75	10•
CB/3112G	M12	75	6•

CB/T M5 Series

TORX Bits (for Stationary Screw Systems)



CODE NO		mm	
CB/T25M5	T25	45	6•
CB/T30M5	T30	45	6•

BT/7000S3

3 Piece Socket Adaptor Set



CODE NO	
BT/7000S3	10

BT/7015 1/4"-1/4"
BT/7020 3/8"-1/4"

BT/7030 1/2"-1/4"

5 Screwdrivers and Bits

BT/01QH

Magnetic Bit Holder (Quick Release)

DIN 3126-E6.3, ISO 1173



CODE NO	Ø"	mm	Box
BT/01QH	1/4	60	10

BT/01DUO

DUO Bit Holder (with Socket Adaptor)

DIN 3126-E6.3, ISO 1173



CODE NO	Ø"	mm	Box
BT/01DUO	1/4	75-85	10

BT/01SL2

Slim Magnetic Bit Holder (Screw Grab Magnet)

DIN 3126-E6.3, ISO 1173



CODE NO	Ø mm	mm	Box
BT/01SL2	14.8 - 11.0	73.4 - 67.2	6

BT/00 Series

Magnetic Bit Holders

DIN 3126-E6.3, ISO 1173



CODE NO	Ø"	mm	Box
BT/02	1/4	60	10
BT/03	1/4	75	10
BT/05	1/4	150	10

For display carded delivery = Item code + X

BT/08

Magnetic Bit Holder - SDS-Plus



CODE NO	Ø"	mm	Box
BT/08	1/4	80	10

For display carded delivery = Item code + X

F26/RDS90

T90 Ratcheting Bit Driver (Stubby)



CODE NO	Ø"	mm	Box
F26/RDS90	1/4	95	1

F26/BDS

12-in-1 Stubby Bit Driver



CODE NO	Ø"	mm	Box
F26/BDS	1/4	90	12

	F26/BDS 1/4" x 90 mm		CB/660P154 PH1/4.0 x 30 mm
	CB/660S6H6 S6.0/6.0 x 30 mm		CB/660P255 PH2/5.0 x 30 mm
	CB/660T2T3 T20/T30 x 30 mm		CB/660Z1H4 PZ1/4.0 x 30 mm
	CB/660Z1H5 PZ2/5.0 x 30 mm		CB/660Z2H5 PZ2/5.0 x 30 mm

3100/BT1

Bit Driver with Magazine



CODE NO	Ø"	mm	Box
3100/BT1	1/4	100	12

F26/RDF90

T90 Ratcheting Bit Driver



CODE NO	Ø"	mm	Box
F26/RDF90	1/4	250	1

	CB/610 4.0, 5.5 mm		CB/250 PH1, PH2		CB/350 PZ1, PZ2
--	--------------------	--	-----------------	--	-----------------

F26/RDS

12-in-1 Stubby Ratchet Bit Driver



CODE NO	Ø"	mm	Box
F26/RDS	1/4	105	12

	F26/RDS 1/4" x 105 mm		CB/660P154 PH1/4.0 x 30 mm
	CB/660S6H6 S6.0/6.0 x 30 mm		CB/660P255 PH2/5.0 x 30 mm
	CB/660T2T3 T20/T30 x 30 mm		CB/660Z1H4 PZ1/4.0 x 30 mm
	CB/660Z1H5 PZ2/5.0 x 30 mm		CB/660Z2H5 PZ2/5.0 x 30 mm

3100/BT6A
7 Piece Bit Driver Set



CODE NO		
3100/BT6A		12

- 3100/BT1 1/4"x60 mm
- CB/610 4.0, 5.5, 6.5 mm
- CB/250 PH1, PH2
- CB/350 PZ1

F26/BT Series
C-PLUS Bit Drivers



CODE NO			
F26/BT	1/4	100	12
F26/BTL	1/4	300	12

F26/SBT
C-PLUS Bit Driver (Compact)



CODE NO			
F26/SBT	1/4	110	12

F26/LBT
C-PLUS Bit Driver (Compact-Quick Release)



CODE NO			
F26/LBT	1/4	146	12

F26/FBT
C-Plus Bit Driver (Flexible Shaft)



CODE NO			
F26/FBT	1/4	150	12

F26/TBT
T-Handle Bit Driver



CODE NO			
F26/TBT	1/4	160	6

F26/BR1F
1/4" Reversible Bit Ratchet - Flex Head



72 tooth fine mechanism, 8-position flexible forged body (flat) that can be locked in the desired position

CODE NO			
F26/BR1F	1/4	111	10

F26/BR1
Reversible Bit Ratchet No.1



60-tooth fine mechanism, forged body (curved), switch lever

CODE NO			
F26/BR1	1/4	90	10

F26/BR2
Reversible Bit Ratchet No.2



60-tooth fine mechanism, forged body (flat), switch lever, low profile for maximum access

CODE NO			
F26/BR2	1/4	90	10

F26/AD1
Angled Gear Driver



Suitable for 1/4" hex C 6.3 and E 6.3 bits, for use with power tools especially in restricted areas

CODE NO			
F26/AD1	1/4	140	12

BT/01XF
1/4" Long Reach Bit Holder (Flexible Shaft)



Particularly for use in restricted areas thanks to long and flexible shaft
Max 57 Nm - 2000 rpm

CODE NO			
BT/01XF	1/4	300	10

CB/ST31
31 Piece Bit Set



CODE NO	
CB/ST31	6

- CB/610 4.0, 5.5, 6.5 mm
- CB/250 2xPH1, 3xPH2, PH3
- CB/350 2xPZ1, 3xPZ2, PZ3
- BT/02
- CB/800 T10, T15, T20, T25, T27, T30, T40
- CB/800T T20, T30
- CB/1800 2, 2.5, 3, 4, 5, 6 mm

CB/ST25
25 Piece Mini Socket and Bit Set



CODE NO	
CB/ST25	6

- F26/BR2
- BT/02
- BT/7010
- CO2-H 6 PC
- 5.5, 6, 7, 8, 10, 13 mm
- CB/610 4.0, 6.5 mm
- CB/250 PH1, PH2
- CB/350 PZ1, PZ2
- CB/800 T10, T15, T20, T25, T30, T40
- CB/1800 3, 4, 5, 6 mm

6.3
1/4"

5 Screwdrivers and Bits

CB/ST32

32 Piece Screwdriver Bit Set



CODE NO



CB/ST32

6



CB/610 4.0, 5.5, 6.5 mm



CB/800 T10, T15, T20, T25, T27, T30, T40



CB/250 2xPH1, 3xPH2, PH3



CB/800T T20, T30



CB/350 2xPZ1, 3xPZ2, PZ3



CB/1800 2, 2.5, 3, 4, 5, 6 mm



BT/02



F26/SBT 1/4"

CB/ST111

11 Piece Bit Set - Slotted/PH/PZ



CODE NO



CB/ST111

6



CB/610 4.0, 6.5 mm



CB/250 PH1, 2xPH2, PH3



BT/02



CB/350 PZ1, 2xPZ2, PZ3

CB/ST112

11 Piece Bit Set - PH/PZ



CODE NO



CB/ST112

6



CB/250 PH1, 3xPH2, PH3



BT/02



CB/350 PZ1, 3xPZ2, PZ3

CB/ST61

61 Piece Bit Set



CODE NO



CB/ST61

6



CB/610 4.0, 5.5, 6.5 mm



CB/800 T6, T7, T8, T9, T10, T15, 2xT20, T25, T27, 2xT30, T40



CB/250 PH0, PH1, 10xPH2, PH3



CB/800T T10, T15, T20, T25, T27, T30, T40



CB/350 PZ0, PZ1, 10xPZ2, PZ3



CB/800IPR IPR20



CB/840 No.1, No.2, No.3



BT/8001 1/4" - 1/4"



CB/1800 2, 2.5, 3, 4, 5, 6 mm



BT/02

CB/ST113

11 Piece Bit Set - TORX



CODE NO



CB/ST113

6



CB/800 T6, T8, T9, T10, T15, T20, T25, T27, T30, T40



BT/02

CB/ST56

56 Piece Screwdriver Bit Set



CODE NO



CB/ST56


1



CB/610 4.0, 5.5, 6.5 mm



CB/1800 2, 2.5, 3, 4, 5, 6 mm



CB/250 PH0, PH1, PH2, PH3




CB/840 No.1, No.2, No.3



CB/350 PZ0, PZ1, PZ2, PZ3




CB/850 M5, M6, M8



CB/800 T6, T7, T8, T9, T10, T15, T20, T25, T27, T30, T40



CB/860 No.6, No.8, No.10



CB/800T T10, T15, T20, T25, T27, T30, T40



CB/870 TW1, TW2, TW3, TW4, TW5



CB/800IPR IPR20, IPR25, IPR30




BT/7010

F26/BT C-PLUS Bits Tutucu Tornavida



BT/02



BT/8001 1/4" - 1/4"

CB/ST114

11 Piece Bit Set - Hexagon



CODE NO



CB/ST114

6



CB/1800 2, 2.5, 2x3, 2x4, 2x5, 2x6 mm



BT/02



6 Pliers and Cutters

6 Pliers and Cutters

114 | 124



E01-11 Series

Combination Pliers (Chrome Finish / DuoTech Handles)

DIN / TS ISO 5746



CODE NO	mm "	Ø mm	6
E01-11-0140	140 - 5-1/2"	1.6	6
E01-11-0160	160 - 6"	1.8	6
E01-11-0180	180 - 7"	2.0	6
E01-11-0200	200 - 8"	2.5	6

E01-41 Series

Combination Pliers (Polished Finish / DuoTech Handles)

DIN / TS ISO 5746



CODE NO	mm "	Ø mm	6
E01-41-0140	140 - 5-1/2"	1.6	6
E01-41-0160	160 - 6"	1.8	6
E01-41-0180	180 - 7"	2.0	6
E01-41-0200	200 - 8"	2.5	6

E01-44 Series

Combination Pliers (Polished Finish / PVC Sleeves)

DIN / TS ISO 5746



CODE NO	mm "	Ø mm	6
E01-44-0140	140 - 5-1/2"	1.6	6
E01-44-0160	160 - 6"	1.8	6
E01-44-0180	180 - 7"	2.0	6
E01-44-0200	200 - 8"	2.5	6

E06-11 Series

Diagonal Cutters (Chrome Finish / DuoTech Handles)

DIN / TS ISO 5749



CODE NO	mm "	Ø mm	6
E06-11-0140	140 - 5-1/2"	1.8	6
E06-11-0160	160 - 6"	2.0	6
E06-11-0180	180 - 7"	2.5	6

E06-41 Series

Diagonal Cutters (Polished Finish / DuoTech Handles)

DIN / TS ISO 5749



CODE NO	mm "	Ø mm	6
E06-41-0140	140 - 5-1/2"	1.8	6
E06-41-0160	160 - 6"	2.0	6
E06-41-0180	180 - 7"	2.5	6

E06-44 Series

Diagonal Cutters (Polished Finish / PVC Sleeves)

DIN / TS ISO 5749



CODE NO	mm "	Ø mm	6
E06-44-0140	140 - 5-1/2"	1.8	6
E06-44-0160	160 - 6"	2.0	6
E06-44-0180	180 - 7"	2.5	6

E08-11 Series

Power Diagonal Cutters (Chrome Finish / DuoTech Handles)

DIN / TS ISO 5749



CODE NO	mm "	Ø mm	6
E08-11-0160	160 - 6-1/2"	2.0	6
E08-11-0180	180 - 7"	2.2	6
E08-11-0200	200 - 8"	2.5	6

E08-41 Series

Power Diagonal Cutters (Polished Finish / DuoTech Handles)

DIN / TS ISO 5749



CODE NO	mm "	Ø mm	6
E08-41-0160	160 - 6-1/2"	2.0	6
E08-41-0180	180 - 7"	2.2	6
E08-41-0200	200 - 8"	2.5	6

E99-41-02A

2 Piece Pliers Set

E01-41-0180
(180 mm)
E06-41-0160
(160 mm)



CODE NO	1
E99-41-02A	1

E99-41-03A
3 Piece Pliers Set

- E01-41-0180 (180 mm)
- E06-41-0160 (160 mm)
- E15-41-0160 (160 mm)



CODE NO	
E99-41-03A	1

E99-41-03B
3 Piece Pliers Set (incl. E30 Water Pump Pliers)

- E01-41-0180 (180 mm)
- E06-41-0160 (160 mm)
- E30-54-0250 (250 mm)



CODE NO	
E99-41-03B	1

E99-41-05 Series
5 Piece Pliers and Screwdriver Set

new



CODE NO	
E99-41-05PH	1

- E01-41-0180 F10 4.0x100, 5.5x125 mm
- E06-41-0160 F14 PH2x100 mm

E99-41-05PZ	1
Content: Same as E99-41-05PH but with Pozidriv screwdrivers instead of Phillips.	

E99-41-W09 Series
9 Piece Pliers and Screwdriver Sets (in Vinyl Wallet)



CODE NO	
E99-41-W09PH	1

- E01-41-0180 F10 2.5x75, 4.0x100, 5.5x125 mm
- E06-41-0160 F14 PH1x80, PH2x100 mm
- E15-41-0160 6105CP Voltage Tester (Short)

E99-41-W09PZ	1
Content: Same as E99-41-W09PH but with Pozidriv screwdrivers instead of Phillips.	

SE11-24
24 Piece Pliers Display Pack (Chrome Finish / DuoTech Handles)

- 12x E01-11-0180 (180 mm)
- 12x E06-11-0160 (160 mm)



BUY MORE PAY LESS

CODE NO	
SE11-24	1

SE41-24
24 Piece Pliers Display Pack (Polished Finish / DuoTech Handles)

- 12x E01-41-0180 (180 mm)
- 12x E06-41-0160 (160 mm)



BUY MORE PAY LESS

CODE NO	
SE41-24	1

SE44-24
24 Piece Pliers Display Pack (Polished Finish / PVC Sleeves)



- 12x E01-44-0180 (180 mm)
- 12x E06-44-0160 (160 mm)



BUY MORE PAY LESS

CODE NO	
SE44-24	1

E09/SH-125
Diagonal Cutter (for Plastic)



CODE NO		
E09/SH-125	125 - 5"	6

E09 Series
Diagonal Cutters (for Plastic)



CODE NO		
E09-44-0140	140 - 5-1/2"	6
E09-44-0160	160 - 6"	6

E09/45-160
Diagonal Cutter For Plastic (45°)



CODE NO		
E09/45-160	160 - 6"	6

E09/90-160
Diagonal Cutter For Plastic (90°)



CODE NO		
E09/90-160	160 - 6"	6

6 Pliers and Cutters

E15-11 Series

Long Nose Pliers (Chrome Finish / DuoTech Handles)

DIN / TS ISO 5745



CODE NO	mm "	Ø mm	
E15-11-0160	160 - 6"	1.6	6
E15-11-0200	200 - 8"	1.6	6

E15-41 Series

Long Nose Pliers (Polished Finish / DuoTech Handles)

DIN / TS ISO 5745



CODE NO	mm "	Ø mm	
E15-41-0160	160 - 6"	1.6	6
E15-41-0200	200 - 8"	1.6	6

E15-44 Series

Long Nose Pliers (Polished Finish/PVC Sleeves)

DIN / TS ISO 5745



CODE NO	mm "	Ø mm	
E15-44-0160	160 - 6"	1.6	6
E15-44-0200	200 - 8"	1.6	6

E15XL-340

Long Nose Pliers (Polished Finish / UniGrip Handles)



CODE NO	mm	
E15XL-340	340	6

E16-11 Series

Bent Long Nose Pliers (Chrome Finish / DuoTech Handles)

DIN / TS ISO 5745



CODE NO	mm "	Ø mm	
E16-11-0160	160 - 6"	1.6	6
E16-11-0200	200 - 8"	1.6	6

E16-41 Series

Bent Long Nose Pliers (Polished Finish/ DuoTech Handles)

DIN / TS ISO 5745



CODE NO	mm "	Ø mm	
E16-41-0160	160 - 6"	1.6	6
E16-41-0200	200 - 8"	1.6	6

E16-44 Series

Bent Long Nose Pliers (Polished Finish/PVC Sleeves)

DIN / TS ISO 5745



CODE NO	mm "	Ø mm	
E16-44-0160	160 - 6"	1.6	6
E16-44-0200	200 - 8"	1.6	6

E16XL-340

Extra Long Bent Nose Pliers (Double Fulcrum)



CODE NO	mm	
E16XL-340	340	6

E17-11-0160

Flat Nose Pliers (Chrome Finish / DuoTech Handles)

DIN / TS ISO 5745



CODE NO	mm "	
E17-11-0160	160 - 6"	6

E17-41-0160

Flat Nose Pliers (Polished Finish / DuoTech Handles)

DIN / TS ISO 5745



CODE NO	mm "	
E17-41-0160	160 - 6"	6

E18-11-0160

Flat Nose Pliers (Polished Finish / DuoTech Handles)

DIN / TS ISO 5745



CODE NO	mm "	
E18-11-0160	160 - 6"	6

E18-41-0160

Flat Nose Pliers (Polished Finish / DuoTech Handles)

DIN / TS ISO 5745



CODE NO	mm "	
E18-41-0160	160 - 6"	6

E05-44 Series

Slip Joint Pliers

DIN / ISO 9343



CODE NO	mm "	mm ²	Box
E05-44-0160	160 - 6"	6	6
E05-44-0200	200 - 8"	6	6

E25-AT1

Automatic Wire Stripper (DuoTech Handles)



CODE NO	mm "	mm ²	Box
E25-AT1	205 - 8"	6	10

E25-BS Series

Wire Strippers (with Adapted Blades)



CODE NO	Ø	mm	Box
E25-BSM20	0.5, 1.2, 1.6, 2.0 mm	165	10
E25-BSA22	AWG 8, 10, 12, 14, 18, 22	165	10
E25-BSM20R	Spare Blades (BSM20)		1
E25-BSA22R	Spare Blades (BSA22)		1

E25-11-0160

Wire Stripping Pliers (Chrome Finish / DuoTech Handles)



CODE NO	mm "	mm ²	Box
E25-11-0160	160 - 6"	10	6

E25-41-0160

Wire Stripping Pliers (Polished Finish / DuoTech Handles)



CODE NO	mm "	mm ²	Box
E25-41-0160	160 - 6"	10	6

E25-MMAX

Multi-Purpose Electrician's Pliers

7 FUNCTIONS IN ONE TOOL



Wire Stripping Capacities : 0.75, 1.0, 1.5, 2.5 mm²
 Screw Cutting Capacities : M3.5, M4
 Wire Crimping Terminal Capacities : 0.75, 1.0, 1.5, 2.5, 4.0 mm²
 Terminal Crimping Terminal Capacities : 0.50, 0.75, 1.0, 1.5, 2.5 mm²
 Cable Cutting Capacities : Ø15 mm / 50 mm²
 Holding Flat and Round materials, bending cable
 Deburring ensures clean cuts on burr-prone surfaces.

CODE NO	mm "	Box
E25-MMAX	225 - 9"	6

E25-MULTI1

Multi-Purpose Wire Stripper, Cutter and Crimping Tool



Wire Stripping Capacities:
 AWG: 18/ 17/ 16/ 14/ 12/ 10
 Metric: 1/ 1,2/ 1,3/ 1,6/ 2,0/ 2,6
 Screw Cutting Capacities:
 Inch : 4-40, 5-40, 6-32, 8-32, 10-24, 10-32
 Metric: M2.6, M3, M3.5, M4, M4.5, M5
 Wire Crimping Terminal Capacities:
 16-10 AWG (2.5-1.3 mm) / 22-18 AWG (1.0-0.6 mm)

CODE NO	mm "	Box
E25-MULTI1	210 - 8 1/4"	10

E26-11-0160

Combi Cutter /Stripper (Chrome Finish / DuoTech Handles)



CODE NO	mm "	mm ²	Box
E26-11-0160	160 - 6"	1.5, 2.5	6

E26-41-0160

Combi Cutter /Stripper (Polished Finish/ DuoTech Handles)



CODE NO	mm "	mm ²	Box
E26-41-0160	160 - 6"	1.5, 2.5	6

E25-ASP16

Automatic Insulation Stripper



For stripping the plastic or rubber insulation of single, multiple cables and wires of 0.5-16 mm², with wire cutter for copper and aluminum wires, multiple strand up to 16 mm²

CODE NO	mm "	mm ²	Box
E25-ASP16	190 - 7-1/2"	0.5-16	6

E25-ASP10

Automatic Insulation Stripper



For stripping the plastic or rubber insulation of single, multiple cables and wires of 0.08-10mm², with wire cutter for copper and aluminum wires, multiple strand up to 10 mm²

CODE NO	mm "	mm ²	Box
E25-ASP10	190 - 7-1/2"	0.08-10	6

6 Pliers and Cutters

E25-AS06
Automatic Wire Stripper

StripX



CODE NO	mm "	mm ²	
E25-AS06	170 - 7"	0.2 - 6	6

E25-CK28
Cable Stripper

StripX



CODE NO	mm "	mm	
E25-CK28	140 - 5 1/2"	8 - 28	12

E25-CK28R	for E25-CK28 & E25-CK28H	6 •
-----------	--------------------------	-----

E25-COS
Coax-Stripper

StripX



CODE NO	mm "	mm ²	
E25-COS	110 - 4"	4.8 - 7.5	12

E25-MIC
Micro Wire Stripper

StripX



CODE NO	mm	mm	
E25-MIC	112	0.16-0.8	6

E25-CK28H
Cable Stripper (Hooked Blade)

StripX



CODE NO	mm "	mm	
E25-CK28H	185 - 7"	4 - 28	12

E25-CK28R	for E25-CK28 & E25-CK28H	6 •
-----------	--------------------------	-----

E25-C4D
Coax and Data Cable Stripping Tool



Universal stripping tool for Coax cables RG59, RG6, RG7, RG11 and data cables, suitable for cutting and stripping 4P/6P/8P cables

CODE NO	mm "	CABLE TYPE	
E25-C4D	110 - 4"	RG59, RG6, RG7, RG11	12

E30-51-0250
Water Pump Pliers (Box Joint / DuoTech Handles)
DIN ISO 8976



CODE NO	mm "	max. mm	
E30-51-0250	250 - 10"	50	6

E29-54-0250
Water Pump Pliers (Self-Adjusting)
DIN ISO 8976



CODE NO	mm "	max. mm	
E29-54-0250	250 - 10"	35	6

E30W-54 Series
Pliers Wrenches (Parallel Jaws)
DIN ISO 8976

new
design



CODE NO	mm "	mm	
E30W-54-0180	180 - 7"	38	6
E30W-54-0250	250 - 10"	52	6
E30W-54-0300	300 - 12"	68	6

E30-54 Series
Water Pump Pliers (Box Joint / PVC Sleeves)
DIN ISO 8976



CODE NO	mm "	max. mm	
E30-54-0180	180 - 7"	42	6
E30-54-0250	250 - 10"	50	6
E30-54-0300	300 - 12"	70	6

E30Q-54 Series
Water Pump Pliers (Push Button)



CODE NO	mm "	max. mm	
E30Q-54-0150	150 - 6"	32	6
E30Q-54-0180	180 - 7"	42	6
E30Q-54-0250	250 - 10"	50	6
E30Q-54-0300	300 - 12"	70	6

E34-250
Canon Plug Pliers (Exchangeable Plastic Jaws)



CODE NO	mm "	max. mm	
E34-250	230 - 9"	65	6

E34-250R	for E34-250	6
----------	-------------	---

E36-54 Series

Concreters' Nippers (PVC Sleeves)

DIN TS ISO 9242



CODE NO	mm "	
E36-54-0225	225 - 9"	6
E36-54-0250	250 - 10"	6
E36-54-0280	280 - 11"	6

For display carded delivery = Item code + X

E36-54-0280D

E36-54-0280 Concreters' Nippers Display Pack - 8 Pc.

**BUY MORE
PAY LESS**



CODE NO	
E36-54-0280D	1

8 x E36-54-0280

E35 Series

Carpenters' Pincers

DIN TS ISO 9242



CODE NO	mm "	
E35-54-0160	160 - 6"	6
E35-54-0180	180 - 7"	6
E35-54-0200	200 - 8"	6

For display carded delivery = Item code + X

E36-56 Series

Concreters' Nippers (No Sleeves)

DIN TS ISO 9242



CODE NO	mm "	
E36-56-0225	225 - 9"	6
E36-56-0250	250 - 10"	6
E36-56-0280	280 - 11"	6

For display carded delivery = Item code + X

E36-56-0280D

E36-56-0280 Concreters' Nippers Display Pack - 8 Pc.

**BUY MORE
PAY LESS**



CODE NO	
E36-56-0280D	1

8 x E36-56-0280

E37 Series

End Cutting Nippers

DIN ISO 5748



CODE NO	mm "	
E37-54-0160	160 - 6"	6
E37-54-0180	180 - 7"	6

For display carded delivery = Item code + X

E38-54-0200

Compact Bolt Cutter (for Nails, Rivets, Bolts etc)



CODE NO	mm "	Ø mm	
E38-54-0200	200 - 8"	3.6	6

E64-54-0200

Wire Rope Shears (Forged Jaws)



For cutting wire ropes, high-leverage design:
Minimum cutting effort

CODE NO	mm "	Ø mm	
E64-54-0200	200	4	6

E64-44-0190

Wire Rope Shears (Punched Jaws)



For cutting wire ropes, high-leverage design:
Minimum cutting effort

CODE NO	mm "	Ø mm	
E64-44-0190	190	4	6

E70-225-2

Revolving Punch Pliers




CODE NO	mm	mm "	
E70-225-2	2 - 2.5 - 3 - 3.5 - 4 - 4.5	225	1

6 Pliers and Cutters

E50-2 Series

Grip Pliers (Curved Jaws)



CODE NO	mm	Ø max. mm	
E50-140-2	140	0-32	1
E50-190-2	190	0-42	1
E50-240-2	240	0-62	1
E50-300-2	300	0-75	1

E50-R03

3 Piece Grip Pliers Set (in Vinyl Wallet)



CODE NO	
E50-R03	1



E50-140-2


E50-190-2

E50-240-2

E51-2 Series

Grip Pliers (Straight Jaws)




CODE NO	mm	max. mm	
E51-190-2	190	0-42	1
E51-240-2	240	0-63	1

E52-240-2

Grip Pliers (Prism Jaws)




CODE NO	mm	Ø max. mm	
E52-240-2	240	0-62	1

E52S-240-2

Grip Pliers (Multi-Purpose Jaws)




CODE NO	mm	Ø max. mm	
E52S-240-2	240	0-67	1

E50L-2 Series

Long Nose Grip Pliers




CODE NO	mm	CAPACITY Max mm	
E50L-170-2	170	0-50	1
E50L-230-2	230	0-68	1

E53-280-2

Welder's Grip Pliers (Fork Jaws)




CODE NO	mm	max. mm	
E53-280-2	290	0-90	1

E54-200-2

Clamp Grip Pliers (Sheet Metal)




CODE NO	mm	CAPACITY Max mm	
E54-200-2	200	0-55	1

E55-2 Series

Clamp Grip Pliers (C Jaw)




CODE NO	mm	max. mm	
E55-280-2	288	0-110	1
E55-470-2	470	0-260	1

E55P-2 Series

Clamp Grip Pliers (C Jaw-Swivel Padded)




CODE NO	mm	Ø max. mm	
E55P-180-2	178	0-50	1
E55P-300-2	300	0-100	1

E55T-2 Series

Clamp Grip Pliers (Table "C" Clamps)



CODE NO	mm	h/mm	
E55T-390-2	390	0-145	1
E55T-500-2	500	0-225	1

E56-L1

Axial Grip Pliers - L Jaw



CODE NO	mm	h/mm	
E56-L1	195	0-15	1

E56-J1

Axial Grip Pliers - J Jaw



CODE NO	mm	h/mm	
E56-J1	210	0-15	1

E56-W1

Axial Grip Pliers - W Jaw



CODE NO	mm	h/mm	
E56-W1	195	0-15	1

E56-L2

Axial Grip Pliers - LL Jaw



CODE NO	mm	h/mm	
E56-L2	220	0-15	1

E56-J2

Axial Grip Pliers - JJ Jaw



CODE NO	mm	h/mm	
E56-J2	235	0-15	1



E60-51-0170

RZR Cable Shears (DuoTech Handles)



Forged in Germany

For cutting copper and aluminum cables
Not suitable for steel wire and wire ropes

CODE NO	mm	Ø mm	
E60-51-0170	170 - 6-1/2"	15	1

E60-51-0200

Cable Shears – Twin Cut (DuoTech Handles)



Forged in Germany

For cutting copper and aluminum cables, small diameter edge for initial cut, bigger diameter edge for final cut
Not suitable for steel wire and wire ropes

CODE NO	mm	Ø mm	
E60-51-0200	200 - 8"	20	6

E60-41 Series

Cable Shears (DuoTech Handles)



For cutting copper and aluminium cables, double cut
Not suitable for steel wire and wire ropes

CODE NO	mm	Ø mm	
E60-41-0160	160 - 6"	10	6
E60-41-0200	200 - 8"	10	6

E60-54-0170

RZR Cable Shears (PVC Sleeves)



Forged in Germany

For cutting copper and aluminum cables
Not suitable for steel wire and wire ropes

CODE NO	mm	Ø mm	
E60-54-0170	170 - 6-1/2"	15	1

E60-54-0200

Cable Shears – Twin Cut (PVC Sleeves)



Forged in Germany

For cutting copper and aluminum cables, small diameter edge for initial cut, bigger diameter edge for final cut
Not suitable for steel wire and wire ropes

CODE NO	mm	Ø mm	
E60-54-0200	200 - 8"	20	6

E60-44 Series

Cable Shears (PVC Sleeves)



For cutting copper and aluminium cables, double cut
Not suitable for steel wire and wire ropes

CODE NO	mm	Ø mm	
E60-44-0160	160 - 6"	10	6
E60-44-0200	200 - 8"	10	6

6 Pliers and Cutters

E62 Series

Ratchet Cable Shears



For cutting thicker copper and aluminum cables, ratchet shear mechanism for single handed, effortless cuts
Not suitable for steel wire and wire ropes

CODE NO	mm	Ø mm	
E62-32	250	32	1
E62-52	280	52	1



E62-32R	Spare Blade	1
E62-52R	Spare Blade	1

G40-48-0145

Multi-Purpose Electrician's Shears



StainlessSteel

Not suitable for high voltage live working

CODE NO	mm	
G40-48-0145	145	10

E69-MC4

Crimping Pliers (for Solar Cable Connectors MC4)



CODE NO	mm ²	mm	
E69-MC4	2.5 - 6.0	220	6



E69-MC4/R	for E69-MC4	1
-----------	-------------	---

E69-MC4/MT

Set of Mounting Tools (for Solar Cable Connectors MC4)



Set of two mounting tools, to loosen and tighten cable glands of MC4 solar plugs, to open the locking of MC4 housings (even in case of mounted lock clip)

CODE NO	mm	
E69-MC4/MT	117	6

E69-OB2

Crimping Pliers (for non-Insulated Open Plug Connectors)



CODE NO	mm ²	mm	
E69-OB2	0.5 - 6.0	220	10



E69-OB2/R	for E69-OB2	1
-----------	-------------	---

E69-YT1

Crimping Pliers (for Insulated Terminals)



CODE NO	mm ²	mm	
E69-YT1	0.5 - 6.0	220	10



E69-YT1/R	for E69-YT1	1
-----------	-------------	---

E69-NT1

Crimping Pliers (for non-Insulated Terminals)




CODE NO	mm ²	mm	
E69-NT1	0.5 - 10.0	220	10



E69-NT1/R	for E69-NT1	1
-----------	-------------	---

E69MC4-W05

5 Piece Tool Kit for Photovoltaics



CODE NO	
E69MC4-W05	1



E69-MC4



E60-51-0170



E25-AT1



E69-MC4/MT

E69-ES1

Crimping Pliers (for End Sleeves)



CODE NO	mm ²	mm	
E69-ES1	0.5 - 6.0	220	10



E69-ES1/R	for E69-ES1	1
-----------	-------------	---

E69Q-P04

4 Piece Crimping Pliers Set



4 interchangeable crimping dies and a high quality ratchet crimping tool in a kit. Quick and effortless change of crimping dies without the need for an additional tool.

CODE NO	
E69Q-P04	1

OB2			
	APPLICATIONS	CAPACITY (mm ²)	AWG
	Non-insulated open plug type connectors	0.5 - 6	20 - 10

YT1			
	APPLICATIONS	CAPACITY (mm ²)	AWG
	Insulated terminals, plug connectors and butt connectors	0.5 - 6	20 - 10

ES1			
	APPLICATIONS	CAPACITY (mm ²)	AWG
	Insulated and non-insulated and sleeves (females)	0.5 - 10	20 - 7

NT1			
	APPLICATIONS	CAPACITY (mm ²)	AWG
	Non-insulated crimp terminals, tube and compressions cable lugs	0.5 - 10	20 - 7

E69-ESSQ1

Crimping Tool (for End Sleeves-Square Form)

new



CODE NO		AWG	
E69-ESSQ1	0.08 - 10	28-7	6

E69-ESHX1

Crimping Tool (for End Sleeves-Hexagonal Form)

new



CODE NO		AWG	
E69-ESHX1	0.08 - 10	28-7	6

E69-ESSQ

Crimping Tool (for End Sleeves-Square Form)



CODE NO		AWG	
E69-ESSQ	0.25 - 6	23-10	6

E69-EZRJ45

Crimping Pliers for EZ-RJ45 Plugs



Compatible with all EZ-RJ45 and EZ-RJ12/11 connectors as well as all standard modular plugs, except AMP, built-in cutter and stripper for flat and round cables.

CODE NO		mm	
E69-EZRJ45	6-8 pin	220	10

E69F-SL

Crimping Pliers (for Scotchlok Connectors)



CODE NO	CAPACITY	mm	
E69F-SL	Ø mm	150	6

E69F-ES2

Crimping Pliers (for End Sleeves-Forged)



CODE NO		mm	
E69F-ES2	0.50 - 16.0	215	6

E69-LSA

Insertion Tool for LSA Blocks



LSA insertion tool for LSA terminals and simultaneous cutting, for UTP and STP cables with 0.4 - 0.8 cross sections

CODE NO	CAPACITY	mm	
E69-LSA	Ø mm	175	6

E69-T046

Crimping Pliers for Western Plugs (for Phone / Data)



CODE NO		mm	
E69-T046	6-8 pin	190	10

E69-T468

Crimping Pliers for Western Plugs (for Phone / Data)




CODE NO		mm	
E69-T468	4-6-8 pin	190	10

6 Pliers and Cutters

E80 Series

Wire Twisting Pliers (Reversible)




CODE NO	∅ max. mm	mm	
E80-230R	0.5 - 1.6	230	1
E80-280R	0.5 - 1.6	280	1

E80-230

Wire Twisting Pliers




CODE NO	∅ mm	mm	
E80-230	0.5 - 1.6	230	1

E81-180

Nut Pliers




CODE NO	mm "	
E81-180	180 - 7"	6

E82-190

Cleco Pliers




CODE NO	mm	
E82-190	190	6

E65 Series

External Circlip Pliers (Straight-with Spring)

DIN / ISO 5254 A, TS 60




CODE NO	mm	mm	
E65-44-0140/0	140	3 - 10 / A0	6
E65-44-0140	140	10 - 25 / A1	6
E65-44-0180	180	19 - 60 / A2	6
E65-44-0225	225	40 - 100 / A3	6
E65-44-0310	310	85 - 140 / A4	6

E66 Series

External Circlip Pliers (Bent-with Spring)

DIN / ISO 5254 B, TS 60



CODE NO	mm	mm	
E66-44-0140/0	140	3 - 10 / A0B	6
E66-44-0140	140	10 - 25 / A1B	6
E66-44-0180	180	19 - 60 / A2B	6
E66-44-0225	225	40 - 100 / A3B	6
E66-44-0310	310	85 - 140 / A4B	6

E99-CP04A

4 Piece Circlip Pliers Set (in Roll Pouch)



CODE NO	
E99-CP04A	1



E65-44-0180



E66-44-0180



E67-44-0180




E68-44-0180

E67 Series

Internal Circlip Pliers (Straight)

DIN / ISO 5256 C, TS 60




CODE NO	mm	mm	
E67-44-0140/0	140	8 - 13 / J0	6
E67-44-0140	140	12 - 25 / J1	6
E67-44-0180	180	19 - 60 / J2	6
E67-44-0225	225	40 - 100 / J3	6
E67-44-0310	310	85 - 140 / J4	6

E68 Series

Internal Circlip Pliers (Bent)

DIN / ISO 5256 D, TS 60



CODE NO	mm	mm	
E68-44-0140/0	140	8 - 13 / J0B	6
E68-44-0140	140	12 - 25 / J1B	6
E68-44-0180	180	19 - 60 / J2B	6
E68-44-0225	225	40 - 100 / J3B	6
E68-44-0310	310	85 - 140 / J4B	6

E99-CP04A/2

4 Piece Circlip Pliers Set (in Roll Pouch)



CODE NO	
E99-CP04A/2	1



E65-44-0140



E66-44-0180



E67-44-0140



E68-44-0180

7 VDE 1000V Tools and Multimeters

125 | 138



G01 Series

C-PLUS 1000V Slotted Screwdrivers (VDE)

EN 60900, VDE 0682 Teil 201, DIN ISO 2380



CODE NO	mm	mm	
G01-025-075	2.5	75	12
G01-030-100	3.0	100	12
G01-035-100	3.5	100	12
G01-040-100	4.0	100	12
G01-045-125	4.5	125	12
G01-055-125	5.5	125	12
G01-065-150	6.5	150	12
G01-080-175	8.0	175	12

G02 Series

C-PLUS 1000V Phillips Screwdrivers (VDE)

EN 60900, VDE 0682 Teil 201, DIN ISO 8764



CODE NO		mm	
G02-000-060	PH0	60	12
G02-001-080	PH1	80	12
G02-002-100	PH2	100	12
G02-002-150	PH2	150	12
G02-003-150	PH3	150	12

G03 Series

C-PLUS 1000V Pozidriv Screwdrivers (VDE)

EN 60900, VDE 0682 Teil 201, DIN ISO 8764



CODE NO		mm	
G03-000-060	PZ0	60	12
G03-001-080	PZ1	80	12
G03-002-100	PZ2	100	12
G03-002-150	PZ2	150	12
G03-003-150	PZ3	150	12

G04 Series

C-PLUS 1000V TORX Screwdrivers

EN 60900, VDE 0682 Teil 201




CODE NO		mm	
G04-010-100	T10	100	12
G04-015-100	T15	100	12
G04-020-100	T20	100	12
G04-025-125	T25	125	12
G04-027-150	T27	150	12
G04-030-150	T30	150	12

G05 Series

C-PLUS 1000V Terminal Screwdrivers (VDE)

EN 60900, VDE 0682 Teil 201, DIN ISO 8764



CODE NO		mm	
G05-001-080	#1	80	12
G05-002-100	#2	100	12

G06 Series

C-PLUS 1000V Hexagon Screwdrivers (VDE)

EN 60900, VDE 0682 Teil 201



CODE NO	mm	mm	
G06-025-080	2.5	80	12
G06-030-080	3	80	12
G06-040-080	4	80	12
G06-050-080	5	80	12
G06-060-100	6	100	12

G07 Series

C-PLUS 1000V Nut Drivers

EN 60900, VDE 0682 Teil 201, DIN ISO 2236



CODE NO	mm	mm	
G07-050-125	5	125	12
G07-055-125	5.5	125	12
G07-060-125	6	125	12
G07-070-125	7	125	12
G07-080-125	8	125	12
G07-090-125	9	125	12
G07-100-125	10	125	12
G07-110-125	11	125	12
G07-120-125	12	125	12
G07-130-125	13	125	12

G26/BT

C-PLUS 1000V Bit Drivers



CODE NO	"	mm	
G26/BT	1/4	100	12

7 VDE 1000V Tools and Multimeters

G05-B02

2 Piece C-PLUS 1000V Terminal Screwdriver Set (VDE)



x2



CODE NO	
G05-B02	1

G05 #1x80, #2x100 mm

G99-401

4 Piece C-PLUS 1000V Screwdriver Set (VDE) - Slotted/Phillips



x3

x1



CODE NO	
G99-401	1

G01 2.5x75, 4.0x100, 5.5x125 mm
 G02 PH2x100 mm

G99-402

4 Piece C-PLUS 1000V Screwdriver Set (VDE) - Slotted/Pozidriv



x3

x1



CODE NO	
G99-402	1

G01 2.5x75, 4.0x100, 5.5x125 mm
 G03 PZ2x100 mm

G07-B05

5 Piece C-PLUS 1000V Nut Driver Set



x5



CODE NO	
G07-B05	1

G07 6.0x125, 7.0x125, 8.0x125, 10x125 mm, 13x125 mm


G99-701

7 Piece C-PLUS 1000V Screwdriver Set (VDE) - Slotted/Phillips + Tester



x5

x2



CODE NO	
G99-701	1

G01 3.0x100, 4.0x100, 5.5x125, 6.5x150 mm
 G02 PH1x80, PH2x100 mm
 G09-VT30 Voltage Tester (Short)


G99-702

7 Piece C-PLUS 1000V Screwdriver Set (VDE) - Slotted/Pozidriv + Tester



x5

x2



CODE NO	
G99-702	1

G01 3.0x100, 4.0x100, 5.5x125, 6.5x150 mm
 G03 PZ1x80, PZ2x100 mm
 G09-VT30 Voltage Tester (Short)

G99-901

9 Piece C-PLUS 1000V Screwdriver Set (VDE-in Vinyl Wallet)

x5

x2

x2



CODE NO	
G99-901	1

G01 3.0x100, 4.0x100, 5.5x125, 6.5x150 mm
 G03 PZ1x80, PZ2x100 mm
 G02 PH1x80, PH2x100 mm
 G09-VT30 Voltage Tester (Short)

SG99 Series

C-PLUS 1000V Screwdriver Set Display Packs (VDE)



CODE NO	
SG99-701	1
12x G99-701	
SG99-702	1
12x G99-702	

GRT-M Series

Rethreading Tools




CODE NO	M SIZE	mm	
GRT-M35	M3.5x0.6	118	12
GRT-M40	M4.0x0.7	118	12

G01S Series

C-PLUS 1000V Slotted Screwdrivers (Slimline)

EN 60900, VDE 0682 Teil 201, DIN ISO 2380

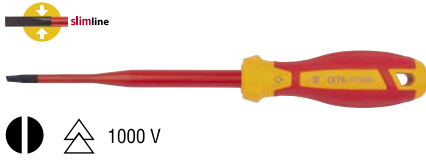

CODE NO	mm	mm	
G01S-025-100	2.5	100	12
G01S-030-100	3.0	100	12
G01S-035-100	3.5	100	12
G01S-040-100	4.0	100	12
G01S-055-125	5.5	125	12
G01S-065-150	6.5	150	12

G02S Series

C-PLUS 1000V Phillips Screwdrivers (Slimline)

EN 60900, VDE 0682 Teil 201, DIN ISO 8764



CODE NO		mm	
G02S-001-080	PH1	80	12
G02S-002-100	PH2	100	12

G03S Series

C-PLUS 1000V Pozidriv Screwdrivers (Slimline)

EN 60900, VDE 0682 Teil 201, DIN ISO 8764




CODE NO		mm	
G03S-001-080	PZ1	80	12
G03S-002-100	PZ2	100	12

G05S-002-100

C-PLUS 1000V Terminal Screwdriver (Slimline)

EN 60900, VDE 0682 Teil 201, DIN ISO 8764

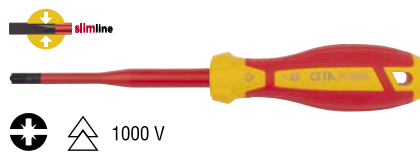


CODE NO		mm	
G05S-002-100	#2	100	12

G04S Series

C-PLUS 1000V TORX Screwdrivers (Slimline)


EN 60900, VDE 0682 Teil 201, DIN ISO 8764

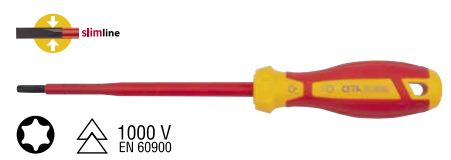

CODE NO		mm	
G04S-010-100	T10	100	12
G04S-015-100	T15	100	12
G04S-020-100	T20	100	12
G04S-025-125	T25	125	12


G99-700S Series

7 Piece C-PLUS 1000V Screwdriver Sets (Slimline)

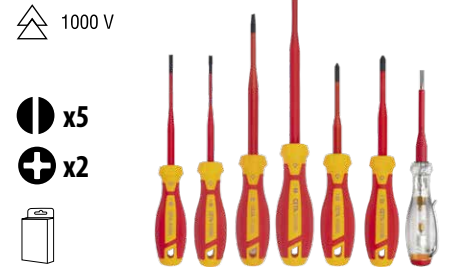


CODE NO		
G99-701S		1
G01S	3.5x100, 4.0x100, 5.5x125, 6.5x150 mm	
G02S	PH1x80, PH2x100 mm	
G09-VT30	Voltage Tester (Short)	
G99-702S		1


Content: Same as G99-701S but with Pozidriv screwdriver instead of Phillips.




COLD IMPACT RESISTANCE (-25°C)




ELECTRICAL TEST (10.000V)




PRESSURE TEST (5000V)




INSULATION ADHESION TEST




FLAMMABILITY TEST




10.000V TEST (%100 Control)




COLD IMPACT RESISTANCE (-25°C)




ELECTRICAL TEST (10.000V)




PRESSURE TEST (5000V)



INSULATION ADHESION TEST



FLAMMABILITY TEST



10.000V TEST (%100 Control)

7 VDE 1000V Tools and Multimeters

G08QH C-PLUS 1000V Screwdriver Blade Holder Handle **new**

EN 60900, VDE 0682 Teil 201, DIN ISO 2380



CODE NO	mm	mm	
G08QH	10	105	6

G08RC Rotating Cap for 1000V Screwdriver Blades **new**

EN 60900, VDE 0682 Teil 201, DIN ISO 8764



CODE NO	mm	mm	
G08RC	19	18	12

G08B-SL Series 1000V Slotted Screwdriver Blades (Slimline) **new**

EN 60900, VDE 0682 Teil 201, DIN ISO 2380



CODE NO	mm	mm	
G08B-SL25	2.5	100/165	12
G08B-SL30	3.0	100/165	12
G08B-SL35	3.5	100/165	12
G08B-SL40	4.0	100/165	12
G08B-SL55	5.5	100/165	12
G08B-SL65	6.5	100/165	12

G08B-PH Series 1000V Phillips Screwdriver Blades (Slimline) **new**

EN 60900, VDE 0682 Teil 201, DIN ISO 8764



CODE NO		mm	
G08B-PH1	PH1	100/165	12
G08B-PH2	PH2	100/165	12

G08B-PZ Series 1000V Pozidriv Screwdriver Blades (Slimline) **new**

EN 60900, VDE 0682 Teil 201, DIN ISO 8764



CODE NO		mm	
G08B-PZ1	PZ1	100/165	12
G08B-PZ2	PZ2	100/165	12

G08B-SPZ2 1000V Terminal Screwdriver Blade (Slimline) **new**

EN 60900, VDE 0682 Teil 201, DIN ISO 8764



CODE NO		mm	
G08B-SPZ2	#2	100/165	12

G08B-TX Series 1000V TORX Screwdriver Blades (Slimline) **new**

EN 60900, VDE 0682 Teil 201



CODE NO		mm	
G08B-TX10	T10	100/165	12
G08B-TX15	T15	100/165	12
G08B-TX20	T20	100/165	12
G08B-TX25	T25	100/165	12

G08C-SQ Series Square Control Cabinet Key Blades **new**



CODE NO		mm	
G08C-SQ06	6	40/93	12
G08C-SQ08	8	40/93	12

G08C-TR08 Triangle Control Cabinet Key Blade **new**



CODE NO		mm	
G08C-TR08	8	40/93	12

G08C-PC05 Double-Bit Control Cabinet Key Blade **new**



CODE NO		mm	
G08C-PC05	5	40/93	12

G08-21/1 21 Piece C-PLUS 1000V Interchangeable Blade Screwdriver Set **new**

EN 60900, VDE 0682 Teil 201, DIN ISO 2380



CODE NO	PIECE	
G08-21/1	21	1

G08-11/1 11 Piece C-PLUS 1000V Interchangeable Blade Screwdriver Set **new**

EN 60900, VDE 0682 Teil 201, DIN ISO 2380



CODE NO	PIECE	
G08-11/1	11	1

G08-05/1 5 Piece C-PLUS Interchangeable Blade Cabinet Key Set **new**



CODE NO	PIECE	
G08-05/1	5	12



All sets are supplied in fabric bags

G09-VT30

C-PLUS VDE Single Pole Voltage Tester (Short)

new

VDE 0680/06, DIN 57680/6, TS 13108



CODE NO	⌀ mm	VOLTAGE RANGE	mm	24 •
G09-VT30	3.0	110-250	140	24 •
For display carded delivery = Item code + X				12

G09-VT35

C-PLUS VDE Single Pole Voltage Tester (Long-Slimline)

new

VDE 0680/06, DIN 57680/6, TS 13108




CODE NO	⌀ mm	VOLTAGE RANGE	mm	24 •
G09-VT35	3.5	110-250	170	24 •
For display carded delivery = Item code + X				12

G09-VT40

C-PLUS Single Pole Voltage Tester (Long-Slimline)

new




CODE NO	⌀ mm	VOLTAGE RANGE	mm	24 •
G09-VT40	4.0	110-250	170	24 •

G09-VTP1

C-PLUS Single Pole Phillips Voltage Tester (Long-Slimline)

new



CODE NO	⌀ mm	VOLTAGE RANGE	mm	24 •
G09-VTP1	PH1	110-250	170	24 •

6105CP

Single-Pole Voltage Tester (Short)

VDE 0680/06, DIN 57680/6, TS 13108



CODE NO	⌀ mm	VOLTAGE RANGE	mm	24 •
6105CP	3.0	110-250	140	24 •
For display carded delivery = Item code + X				12

6106CP

C-PLUS Voltage Tester (VDE-Long)

VDE 0680/06, DIN 57680/6, TS 13108



CODE NO	⌀ mm	VOLTAGE RANGE	mm	24 •
6106CP	3.5	110-250	170	24 •
For display carded delivery = Item code + X				12

6106EX

Single-Pole Voltage Tester (Long)



CODE NO	⌀ mm	VOLTAGE RANGE	mm	24 •
6106EX	4.0	110-250	187	24 •

G09-NC2

Non-Contact AC Voltage Detector




(MAX. 1000 V)

For 48V - 1000V AC, aural and visual notifications, CAT II insulation, 2 x 1.5 V AAA batteries, 6 hours of battery time

CODE NO	mm	mm	20
G09-NC2	5.0	160	20

E75-081

Control Cabinet Key - 7 Profiles

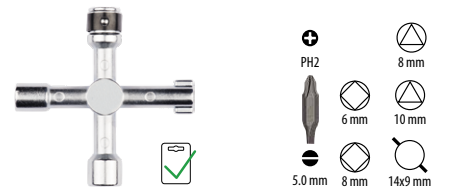

CODE NO	mm	12
E75-081	71	12

7 VDE 1000V Tools and Multimeters

G10-18 Series

1000V Combination Pliers – Chrome Finish (VDE)

EN 60900, VDE 0682 Teil 201, DIN ISO 5746



Forged in Germany



Ideal for live working up to 1000V AC or 1500V DC

CODE NO	mm "	Ø mm	
G10-18-0160	160 - 6"	1.8	6
G10-18-0180	180 - 7"	2.0	6
G10-18-0200	200 - 8"	2.5	6

G10-48 Series

1000V Combination Pliers – Polished Finish (VDE)

EN 60900, VDE 0682 Teil 201, DIN ISO 5746



Ideal for live working up to 1000V AC or 1500V DC

CODE NO	mm "	Ø mm	
G10-48-0160	160 - 6"	1.8	6
G10-48-0180	180 - 7"	2.0	6
G10-48-0200	200 - 8"	2.5	6

SG18-24

24 Piece 1000V Pliers (VDE) Display Pack

**BUY MORE
PAY LESS**



CODE NO	
SG18-24	1



12x G10-18-0180



12x G12-18-0160

G12-18 Series

1000V Diagonal Cutters – Chrome Finish (VDE)

EN 60900, VDE 0682 Teil 201, DIN ISO 5749



Forged in Germany



Ideal for live working up to 1000V AC or 1500V DC

CODE NO	mm "	Ø mm	
G12-18-0140	140 - 5-1/2"	1.8	6
G12-18-0160	160 - 6"	2.0	6
G12-18-0180	180 - 7"	2.5	6

G12-48 Series

1000V Diagonal Cutters – Polished Finish (VDE)

EN 60900, VDE 0682 Teil 201, DIN ISO 5749



Ideal for live working up to 1000V AC or 1500V DC

CODE NO	mm "	Ø mm	
G12-48-0140	140 - 5-1/2"	1.8	6
G12-48-0160	160 - 6"	2.0	6
G12-48-0180	180 - 7"	2.5	6

G14-18 Series

1000V Power Diagonal Cutters (VDE)

EN 60900, VDE 0682 Teil 201, DIN ISO 5749



Forged in Germany



Ideal for live working up to 1000V AC or 1500V DC

CODE NO	mm "	Ø mm	
G14-18-0160	160 - 6"	1.8	6
G14-18-0180	180 - 7"	2.0	6
G14-18-0200	200 - 8"	2.2	6

G99-18-02A

2 Piece 1000V Pliers Set (VDE)



G10-18-0180 (180 mm)
G12-18-0160 (160 mm)

CODE NO	
G99-18-02A	1

G99-18-03A

3 Piece 1000V Pliers Set (VDE)



G10-18-0180 (180 mm)
G12-18-0160 (160 mm)
G15-18-0160 (160 mm)

CODE NO	
G99-18-03A	1

G99-18-05 Series

5 Piece 1000V Pliers and Screwdriver Sets (VDE)



CODE NO	
G99-18-05PH	1



G10-18-0180



G01 4.0x100, 5.5x125 mm



G12-18-0160



G02 PH2x100 mm

G99-18-05PZ	1
-------------	---

Content: Same as G99-18-05PH but with Pozidriv screwdrivers instead of Phillips

G15-18 Series

1000V Long Nose Pliers – Chrome Finish (VDE)

EN 60900, VDE 0682 Teil 201, DIN ISO 5745



Ideal for live working up to 1000V AC or 1500V DC

CODE NO	mm "	Ø mm	
G15-18-0160	160 - 6"	1.6	6
G15-18-0200	200 - 8"	1.6	6

G15-48 Series

1000V Long Nose Pliers – Polished Finish (VDE)

EN 60900, VDE 0682 Teil 201, DIN ISO 5745



Ideal for live working up to 1000V AC or 1500V DC

CODE NO	mm "	Ø mm	
G15-48-0160	160 - 6"	1.6	6
G15-48-0200	200 - 8"	1.6	6

G21-18-0160

1000V Combi Cutter / Stripper – Chrome Finish (VDE)

EN 60900, VDE 0682 Teil 201



Ideal for live working up to 1000V AC or 1500V DC

CODE NO	mm "	mm ²	
G21-18-0160	160 - 6"	1.5, 2.5	6

G21-48-0160

1000V Combi Cutter / Stripper – Polished Finish (VDE)

EN 60900, VDE 0682 Teil 201



Ideal for live working up to 1000V AC or 1500V DC

CODE NO	mm "	mm ²	
G21-48-0160	160 - 6"	1.5, 2.5	6

G16-18 Series

1000V Bent Long Nose Pliers – Chrome Finish (VDE)

EN 60900, VDE 0682 Teil 201, DIN ISO 5745



Ideal for live working up to 1000V AC or 1500V DC

CODE NO	mm "	Ø mm	
G16-18-0160	160 - 6"	1.6	6
G16-18-0200	200 - 8"	1.6	6

G16-48 Series

1000V Bent Long Nose Pliers – Polished Finish (VDE)

EN 60900, VDE 0682 Teil 201, DIN ISO 5745



Ideal for live working up to 1000V AC or 1500V DC

CODE NO	mm "	Ø mm	
G16-48-0160	160 - 6"	1.6	6
G16-48-0200	200 - 8"	1.6	6

G20-18-0160

1000V Wire Stripping Pliers (VDE)

EN 60900, VDE 0682 Teil 201



Ideal for live working up to 1000V AC or 1500V DC

CODE NO	mm "	mm ²	
G20-18-0160	160 - 6"	10	6

G30-48 Series

1000V Cable Shears (VDE)

EN 60900, VDE 0682 Teil 201



Not suitable for steel wire and wire ropes

Ideal for live working up to 1000V AC or 1500V DC
For cutting copper and aluminum cables

CODE NO	mm "	Ø mm	
G30-48-0160	160 - 6"	10	6
G30-48-0200	200 - 8"	18	6

G17-18-0160

1000V Flat Nose Pliers (VDE)

EN 60900, VDE 0682 Teil 201, DIN ISO 5745



Ideal for live working up to 1000V AC or 1500V DC

CODE NO	mm "	
G17-18-0160	160 - 6"	6

G18-18-0160

1000V Round Nose Pliers (VDE)

EN 60900, VDE 0682 Teil 201, DIN ISO 5745



Ideal for live working up to 1000V AC or 1500V DC

CODE NO	mm "	
G18-18-0160	160 - 6"	6

G30-18-0170

RZR 1000V Cable Shears (VDE)

EN 60900, VDE 0682 Teil 201

new



Not suitable for steel wire and wire ropes

Ideal for live working up to 1000V AC or 1500V DC
For cutting copper and aluminum cables

CODE NO	mm "	Ø max. mm	
G30-18-0170	170 - 6-1/2"	15	6

G30-18-0200

1000V Cable Shears – Twin Cut

EN 60900, VDE 0682 Teil 201

new



Not suitable for steel wire and wire ropes

Ideal for live working up to 1000V AC or 1500V DC, For cutting copper and aluminum cables, small diameter edge for initial cut, bigger diameter edge for final cut

CODE NO	mm "	Ø mm	
G30-18-0200	200 - 8"	20	6

7 VDE 1000V Tools and Multimeters

G25-18-0250

1000V Water Pump Pliers (VDE)

EN 60900, VDE 0682 Teil 201, DIN ISO 8976

new



Forged in Germany



9-position adjustment, box-joint design

CODE NO	mm	max. mm	
G25-18-0250	250 - 10"	28	6

GB09 Series

1000V Open End Wrenches

EN 60900, VDE 0682 Teil 201



CODE NO	mm	mm	
GB09-05/2	5.5	93	12
GB09-06	6	93	12
GB09-07	7	97	12
GB09-08	8	99	12
GB09-09	9	103	12
GB09-10	10	113	12
GB09-11	11	123	12
GB09-12	12	133	12
GB09-13	13	143	12
GB09-14	14	155	12
GB09-15	15	158	12
GB09-16	16	163	12
GB09-17	17	173	12
GB09-18	18	180	12
GB09-19	19	188	12
GB09-22	22	203	12
GB09-24	24	228	6

GB09-R06

6 Piece 1000V Open End Wrench Set (in Roll Pouch)



CODE NO	
GB09-R06	1

6 PC: 10, 12, 13, 14, 17, 19 mm

GB21-250

1000V Adjustable Wrench

EN 60900, VDE 0682 Teil 201



CODE NO	mm	mm	
GB21-250	250 - 10"	30	6

GB14 Series

1000V Ring End Wrenches

EN 60900, VDE 0682 Teil 201



CODE NO	mm	mm	
GB14-10	10	170	12
GB14-11	11	175	12
GB14-12	12	180	12
GB14-13	13	185	12
GB14-14	14	190	12
GB14-17	17	205	12
GB14-19	19	215	6
GB14-22	22	245	6
GB14-24	24	265	6

GB14-R06

6 Piece 1000V Ring End Wrench Set (in Roll Pouch)



CODE NO	
GB14-R06	1

6 PC: 10, 12, 13, 14, 17, 19 mm

GK10 Series

1000V T-Handle Hexagon Keys

new
design



CODE NO	mm	mm	
GK10-030	3	100	12
GK10-040	4	150	12
GK10-050	5	150	12
GK10-060	6	200	12
GK10-080	8	200	12

GC02-H Series

1/4" Drive 1000V 6-Point Sockets (VDE)

EN 60900, VDE 0682 Teil 201



CODE NO	mm	mm	
GC02-H040	4	40	12
GC02-H045	4.5	40	12
GC02-H050	5	40	12
GC02-H055	5.5	40	12
GC02-H060	6	40	12
GC02-H070	7	40	12
GC02-H080	8	40	12
GC02-H090	9	40	12
GC02-H100	10	40	12
GC02-H110	11	40	12
GC02-H120	12	40	12
GC02-H130	13	40	12
GC02-H140	14	40	12

GC01-12

1/4" Drive 1000V Quick Release Reversible Ratchet (VDE)

EN 60900, VDE 0682 Teil 201, DIN 3122, ISO 3315



CODE NO	mm	mm	
GC01-12	33	150	6

GC01-20

1/4" Drive 1000V T-Handle Socket Driver

EN 60900, VDE 0682 Teil 201, DIN 3122, TS ISO 3315

new



1000 V
EN 60900

CODE NO	mm	
GC01-20	140	6

GC01-70 Series

1/4" Drive 1000V Extension Bars (VDE)

EN 60900, VDE 0682 Teil 201, DIN 3123, ISO 3316



1000 V
EN 60900

CODE NO	mm	
GC01-72	65	12
GC01-73	115	12
GC01-75	165	12

GC00-17PH2

17 Piece 1/4" Drive 1000V 6 Point Socket Set (VDE)



1000 V
EN 60900

6.3
1/4"

CODE NO	
GC00-17PH2	1



GC02-H 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 mm



GC01-12



GC01-70 65, 115, 165 mm

GC12-H Series

3/8" Drive 1000V 6-Point Sockets (VDE)

EN 60900, VDE 0682 Teil 201



1000 V
EN 60900

10
3/8"

CODE NO	mm	mm	
GC12-H06	6	48	12
GC12-H07	7	48	12
GC12-H08	8	48	12
GC12-H09	9	48	12
GC12-H10	10	48	12
GC12-H11	11	48	12
GC12-H12	12	48	12
GC12-H13	13	48	12
GC12-H14	14	48	12
GC12-H15	15	48	12
GC12-H16	16	48	12
GC12-H17	17	50	12
GC12-H18	18	50	12
GC12-H19	19	50	12
GC12-H20	20	50	12
GC12-H21	21	50	12
GC12-H22	22	52	12

GC18S-H Series

3/8" Drive 1000V Hexagon Socket Bits (VDE)

EN 60900, VDE 0682 Teil 201



1000 V
EN 60900

10
3/8"

CODE NO	mm	mm	
GC18S-H04	4	60	12
GC18S-H05	5	60	12
GC18S-H06	6	60	12
GC18S-H08	8	60	12

GC18S-T Series

3/8" Drive 1000V TORX Socket Bits (VDE)

EN 60900, VDE 0682 Teil 201



1000 V
EN 60900

10
3/8"

CODE NO		mm	
GC18S-T20	T20	60	12
GC18S-T25	T25	60	12
GC18S-T27	T27	60	12
GC18S-T30	T30	60	12
GC18S-T40	T40	60	12
GC18S-T45	T45	60	12

GC18S-X Series

3/8" Drive 1000V XZN Socket Bits (VDE)

EN 60900, VDE 0682 Teil 201



1000 V
EN 60900

10
3/8"

CODE NO		mm	
GC18S-X08	M08	60	12
GC18S-X10	M10	60	12

GC11-12

3/8" Drive 1000V Quick Release Reversible Ratchet (VDE)

EN 60900, VDE 0682 Teil 201, DIN 3122, ISO 3315



1000 V
EN 60900

10
3/8"

CODE NO	mm	mm	
GC11-12	43	200	6

GC11-20

3/8" Drive 1000V T-Handle Socket Driver

EN 60900, VDE 0682 Teil 201, DIN 3122, TS ISO 3315

new



1000 V
EN 60900

CODE NO	mm	
GC11-20	140	6

GC11-40

3/8" Drive 1000V T-Handle (VDE)

EN 60900, VDE 0682 Teil 201, DIN 3122, TS ISO 3315



1000 V
EN 60900

CODE NO	mm	
GC11-40	210	6

7 VDE 1000V Tools and Multimeters

GC11-70 Series

3/8" Drive 1000V Extension Bars (VDE)

EN 60900, VDE 0682 Teil 201, DIN 3123, ISO 3316



CODE NO	mm	
GC11-72	93	12
GC11-75	170	12

GC10-19PH2

19 Piece 3/8" Drive 1000V 6 Point Socket Set (VDE)



10
3/8"

CODE NO	
GC10-19PH2	1



GC12-H 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 22 mm



GC11-12

GC11-70 93, 170 mm

GC22-H Series

1/2" Drive 1000V 6-Point Sockets (VDE)

EN 60900, VDE 0682 Teil 201, DIN 3124, TS ISO 2725-1



12.5
1/2"

CODE NO	mm	mm	
GC22-H10	10	55	12
GC22-H11	11	55	12
GC22-H12	12	55	12
GC22-H13	13	55	12
GC22-H14	14	55	12
GC22-H15	15	55	12
GC22-H16	16	55	12
GC22-H17	17	55	12
GC22-H18	18	55	12
GC22-H19	19	55	12
GC22-H20	20	55	12
GC22-H21	21	55	12
GC22-H22	22	55	12
GC22-H24	24	58	6
GC22-H27	27	60	6
GC22-H30	30	61	6
GC22-H32	32	62	6

GC285-HL Series

1/2" Drive 1000V Hexagon Socket Bits - Long (VDE)

EN 60900, VDE 0682 Teil 201



CODE NO	mm	mm	
GC285-H04L	4	120	12
GC285-H05L	5	120	12
GC285-H06L	6	120	12
GC285-H08L	8	120	12
GC285-H10L	10	120	12

GC21-12

1/2" Drive 1000V Quick Release Reversible Ratchet (VDE)

EN 60900, VDE 0682 Teil 201, DIN 3122, TS ISO 3315



CODE NO	mm	mm	
GC21-12	47.5	234	6

GC21-20

1/2" Drive 1000V T-Handle Socket Driver

EN 60900, VDE 0682 Teil 201, DIN 3122, TS ISO 3315




CODE NO	mm	
GC21-20	140	6

GC21-40

1/2" Drive 1000V T-Handle (VDE)

EN 60900, VDE 0682 Teil 201, DIN 3122, TS ISO 3315

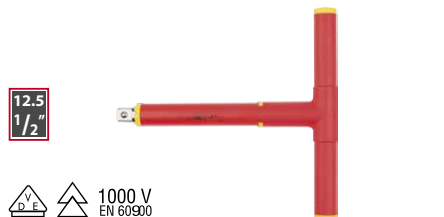

CODE NO	mm	
GC21-40	205	12

GC21-70 Series

1/2" Drive 1000V Insulated Extension Bars

EN 60900, VDE 0682 Teil 201, DIN 3123, ISO 3316



CODE NO	mm	
GC21-74	140	12
GC21-77	270	12

GC20-19PH2

19 Piece 1/2" Drive 1000V 6 Point Socket Set (VDE)



12.5
1/2"

CODE NO	
GC20-19PH2	1



GC22-H 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 22, 24, 27, 30, 32 mm



GC21-12

GC21-70 140 mm, 270 mm

GD02 Series

1000V Torque Wrenches (VDE)



±4 %

10
3/8"

12.5
1/2"

CODE NO	N-m	"	mm	
GD02-1125	5 - 25	3/8	404	1
GD02-1105	10 - 50	3/8	467	1
GD02-2110	20 - 100	1/2	467	1

GJ36-150

1000V Mini Hacksaw (VDE)

EN 60900, VDE 0682 Teil 201



CODE NO	mm	
GJ36-150	280	12

G50-CSN

1000V Cable Knife – Straight

EN 60900, VDE 0682 Teil 201, DIN 3124, TS ISO 2725-1



CODE NO	BLADE mm	mm	
G50-CSN	50	190	12

G50-CSP

1000V Cable Knife – Straight / Insulated

EN 60900, VDE 0682 Teil 201, DIN 3124, TS ISO 2725-1



CODE NO	BLADE mm	mm	
G50-CSP	50	190	12

G50-SRN

1000V Stripping Knife – Round Blade

EN 60900, VDE 0682 Teil 201, DIN 3124, TS ISO 2725-1



CODE NO	BLADE mm	mm	
G50-SRN	50	190	12

G50-SHN

1000V Stripping Knife – Curved Blade

EN 60900, VDE 0682 Teil 201, DIN 3124, TS ISO 2725-1




CODE NO	BLADE mm	mm	
G50-SHN	50	190	12

G50-SGP

1000V Stripping Knife – Curved Blade / Guided

EN 60900, VDE 0682 Teil 201, DIN 3124, TS ISO 2725-1




CODE NO	BLADE mm	mm	
G50-SGP	50	190	12

G99-BP04

4 Piece 1000V Pliers and Screwdriver Set (VDE-in Belt Pouch)



CODE NO	
G99-BP04	1

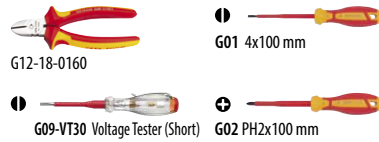


G99-BP06

6 Piece 1000V Pliers and Screwdriver Set (VDE-in Belt Pouch)



CODE NO	
G99-BP06	1

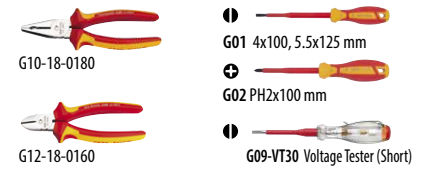


G99-18-W12 Series

G99-18-W12 Series

12 Piece 1000V Pliers and Screwdriver Sets (VDE-in Vinyl Wallet)



CODE NO	
G99-18-W12PH	1

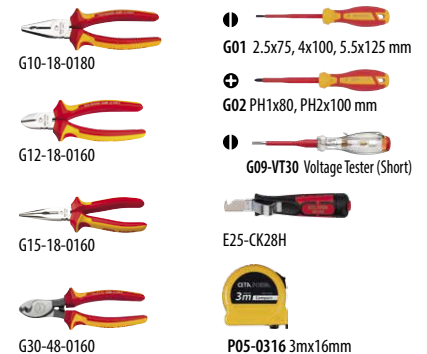

CODE NO	
G99-18-W12PZ	1


Content: Same as G99-18-W12PH but with Pozidriv screwdrivers instead of Phillips

G99-18-W09 Series

9 Piece 1000V Pliers and Screwdriver Sets (VDE-in Vinyl Wallet)



CODE NO	
G99-18-W09PH	1

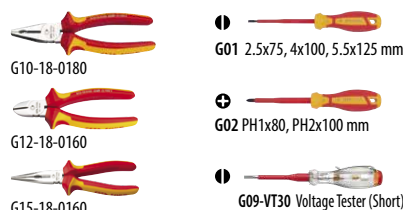

CODE NO	
G99-18-W09PZ	1

Content: Same as G99-18-W09PH but with Pozidriv screwdrivers instead of Phillips

7 VDE 1000V Tools and Multimeters

G99-P26

26 Piece Electrician Tool Set



CODE NO	PIECES	WxHxD / mm
G99-P26	26	440x320x100

G99-0431

31 Piece Electrician Tool Set



31 Piece Tool Set

Sets in Tool Boxes / Bags

Contents Only



(G99-0431+A26-TB19)



(G99-0431+A27-19PL)



(G99-0431+A32)



(G99-0431+A32H)



CODE NO **G99-0431**

G99-0431A26

G99-0431A27

G99-0431A32

G99-0431A32H

G80-AAC1

Digital Multimeter (AC/DC Current-Auto Ranging)



**TRUE
RMS**



CODE NO	
G80-AAC1	1

NCV function, MAX/MIN mode, data hold, backlit display, REL mode, frequency/duty cycle, auto power off and beeper alarm, anti-high voltage circuit design, 1000V CATII, large LCD display, 2xAAA batteries

FUNCTION	INTERVALS	ACCURACY
DC Voltage	400mV/4V/40V/400V/1000V	±(0.5%+5)
AC Voltage	400mV/4V/40V/400V/750V	±(0.8%+10)
DC Current	400uA/4000uA/40mA/400mA/4A/20A	±(1.0%+5)
AC Current	400uA/4000uA/40mA/400mA/4A/20A	±(1.5%+10)
Resistance	400Ω/4kΩ/40kΩ/400kΩ/4MΩ/40MΩ	±(0.8%+2)
Capacitance	4nF/40nF/400nF/4uF/40uF/200uF	±(2.5%+5)
	40nF/400nF/4uF/40uF/400uF/4mF/40mF	
Frequency	10Hz/100Hz/1kHz/10kHz/100kHz/1MHz	±(0.5%+4)
Temperature	-40°C ~ 1000°C	±(1.0%+5)
	-OFF ~ 1832°F	±(1.0%+5)

G80-AAC2

Digital Multimeter (DC Current)



**TRUE
RMS**



ONE BUTTON OPERATION

CODE NO	
G80-AAC2	1

Auto ranging, Automatically range, no shift for AVO tests, LCD display, NCV, True RMS tests, Data hold and backlight function, Analog bar display, Works with 3V AAAx2 battery

FUNCTION	INTERVALS	ACCURACY
DC Voltage	6V/60V/600V	±(0.5%+5)
AC Voltage	6V/60V/600V	±(0.8%+10)
AC Current	10A	±(1.5%+10)
Resistance	600Ω/6kΩ/60kΩ/600kΩ/6MΩ/60MΩ	±(0.8%+2)
AC Frequency	AKm 10Hz-1000Hz/ voltage 10kHz-100kHz, 1mHz-10mHz	±(0.5%+4)
Temperature	-40°C ~ 1000°C	±(1.0%+5)
	-OFF ~ 1832°F	±(1.0%+5)

G80-MDC2

Digital Multimeter (DC Current-Manual Ranging)



CODE NO	
G80-MDC2	1

Manual ranging, Voltage (AC/DC), current (DC), resistance, diode functions, LCD display, NCV, True RMS tests, Data hold function, Works with 3V AAAx2 battery

FUNCTION	INTERVALS	ACCURACY
DC Voltage	200mV/2V/20V/200V/600V	±(0.5%+4)
AC Voltage	200V/600V	±(1.0%+6)
DCA Current	20uA//2mA//200mA/10A	±(1.0%+5)
Resistance	200Ω/2kΩ/20kΩ/2MΩ/200MΩ	±(0.8%+1)


7 VDE 1000V Tools and Multimeters

G85-ADC1 Digital Clampmeter (AC/DC Current-Auto Ranging)

MAX/MIN mode, data hold, clamp jaw lighting, backlit display, REL mode, frequency/duty cycle, auto power off and warning functions, anti-high voltage circuit design, 600V CATIII, large LCD display, 2xAAA batteries



**TRUE
RMS**

CODE NO	Clamp Span max. mm	
G85-ADC1	52	1
FUNCTION	INTERVALS	ACCURACY
DC Voltage	400mV/4V/40V/400V/1000V	±(0.5%+5)
AC Voltage	4V/40V/400V/750V	±(1.0%+5)
DC Current	40A/400A/1000A	±(2.0%+5)
AC Current	40A/400A/1000A	±(2.0%+5)
Resistance	400Ω/4kΩ/40kΩ/400kΩ/4MΩ/40MΩ	±(0.8%+3)
Capacitance	4nF/40nF/400nF/4μF/40μF/400μF/4mF/40mF	±(3.5%+10)
Frequency	10Hz/100Hz/1kHz/10kHz/100kHz/1MHz/10MHz	±(2%+5)
Temperature	-40°C~1000°C / -40°F~1832°F	±(1.0%+5)




G90-IR500 Infrared Thermometer



new

Built-in laser pointer, backlit LCD display, data storage, max/min/average/DIF data storage, high/low heat alarm function, alert function on pre-set temperature, set to zero function, low battery warning, auto power off, 1x9V battery




CODE NO	
G90-IR500	1
TECHNICAL SPECIFICATIONS	
Measurement Range	-30°C ~ 500°C / 22°F ~ 932°F
Accuracy (Deviation)	<-10°C±3°C / <14°F±6°F
Response Time	<400°C (<500ms) / >400°C (<300ms)
Measuring Distance	D:S=12:1
Display Resolution	0.1°C / 0.2°F
Auto power off	Appr. 6 Sec.
Measurement speed	≤ 0.5 seconds
Adjustable ignition ratio	0.1 ~ 1
Led screen display	3 digits
Power consumption	≤50mW
Battery	9V battery (6F22or equivalent)

G85-AAC1 Digital Clampmeter (AC Current-Auto Ranging)

MAX/MIN mode, data hold, clamp jaw lighting, backlit display, REL mode, frequency/duty cycle, auto power off and warning functions, anti-high voltage circuit design, 600V CATIII, large LCD display, 2xAAA batteries



**TRUE
RMS**

CODE NO	Clamp Span max. mm	
G85-AAC1	52	1
FUNCTION	INTERVALS	ACCURACY
DC Voltage	200mV/2V/20V/200V/1000V	±(0.5%+5)
AC Voltage	2V/20V/200V/750V	±(1.0%+5)
AC Current	2A/20A/200A/1000A	±(2.0%+5)
Resistance	200Ω/2kΩ/20kΩ/200kΩ/2MΩ/20MΩ	±(0.8%+3)
Temperature	-40°C~1000°C / -40°F~1832°F	±(1.0%+5)




G90-IR750 Infrared Thermometer



Backlight function, low battery indication, data hold function, Max./Min./AVG./DIF. HOLD function, High/Low temperature Alarm function, zero offset adjustment, unit symbol display



CODE NO	
G90-IR750	1
TECHNICAL SPECIFICATIONS	
Measurement Range	-20°C ~ 750°C / 4°F ~ 1382°F
Accuracy (Deviation)	<-10°C±3°C / <14°F±6°F
Response Time	<400°C (<500ms) / >400°C (<300ms)
Measuring Distance	D:S=12:1
Display Resolution	0.1°C / 0.2°F
Auto power off	Appr. 6 Sec.
Measurement speed	≤ 0.5 second
Adjustable ignition ratio	0.1 ~ 1
Led screen display	3 digits
Power consumption	≤50mW
Battery	9V battery (6F22or equivalent)



8 Electronic Screwdrivers and Pliers

139 | 146



H01 Series

Electronics Slotted Screwdrivers

DIN 8320, DIN 5264



CODE NO	Ø mm	mm	mm
H01-12-040	1.2	40	12•
H01-15-040	1.5	40	12•
H01-18-060	1.8	60	12•
H01-20-060	2.0	60	12•
H01-20-100	2.0	100	12•
H01-25-080	2.5	80	12•
H01-25-100	2.5	100	12•
H01-30-080	3.0	80	12•
H01-30-100	3.0	100	12•
H01-30-150	3.0	150	12•
H01-35-080	3.5	80	12•
H01-40-080	4.0	80	12•
H01-40-100	4.0	100	12•
H01-40-150	4.0	150	12•

H02 Series

Electronics Phillips Screwdrivers



CODE NO	+	mm	mm
H02-00-060	PH00	60	12•
H02-0-060	PH0	60	12•
H02-1-080	PH1	80	12•

H03 Series

Electronics Pozidriv Screwdrivers



CODE NO	+	mm	mm
H03-0-060	PZ0	60	12•
H03-1-080	PZ1	80	12•

H04 Series

Electronics TORX Screwdrivers



CODE NO	T	mm	mm
H04-04-040	T4	40	12•
H04-05-040	T5	40	12•
H04-06-040	T6	40	12•
H04-07-040	T7	40	12•
H04-08-040	T8	40	12•
H04-09-060	T9	60	12•
H04-10-060	T10	60	12•
H04-15-060	T15	60	12•
H04-20-060	T20	60	12•

H05 Series

Electronics PENTALOBE Screwdrivers



For Pentalobe screws which are used on Apple products

CODE NO	P	mm	mm
H05-02-040	P2	40	12•
H05-05-040	P5	40	12•

H06 Series

Electronics Hexagon Screwdrivers



CODE NO	mm	"	mm	mm
H06-15-040	1.5	-	40	12•
H06-20-060	2.0	5/64	60	12•
H06-25-080	2.5	-	80	12•
H06-30-080	3.0	-	80	12•
H06A-0050	-	0.05	40	12
H06A-0116	-	1/16	40	12
H06A-0332	-	3/32	80	12
H06A-0764	-	7/64	80	12

H99-12-06

6 Piece Electronics Screwdriver Set - Slotted/Phillips



CODE NO	mm	mm
H99-12-06		1
H01	1.5x40, 2.0x60, 2.5x80, 3.0x80 mm	
H02	PH00x60, PH0x60 mm	

H99-04-06

6 Piece Electronics Screwdriver Set - TORX



CODE NO	mm	mm
H99-04-06		1
H04	T5x40, T6x40, T7x40, T8x40, T9x60, T10x60 mm	

H99-06-06

6 Piece Electronics Screwdriver Set - Hexagon



CODE NO	mm	mm
H99-06-06		1
H06	1.5x40, 2 (5/64)x60, 2.5x80, 3x80, 3/32"x80, 7/64"x80 mm	

8 Electronic Screwdrivers and Pliers

H99-JK-04

4-in-1 Mini Screwdriver Set



CODE NO	mm	
H99-JK-04	100	1

x2
 x2
 1.4x39, 1.8x39 mm
 PH00x39, PH0x39 mm

H99-JK-06

6 Piece Jewellers Screwdriver Set



CODE NO	
H99-JK-06	1

x4
 x2
 1.4x85, 2.0x90, 2.4x100, 3.0x110mm
 PH0x100, PH1x110 mm

H20-125SB

Electronics Diagonal Cutter (Small Bevel)



CODE NO	mm	mm	
H20-125SB	125	1.2	6

H20-125FL

Electronics Diagonal Cutter (Flush Cut)



CODE NO	mm	mm	
H20-125FL	125	1.0	6

H20T-125SB

Electronics Diagonal Cutter
(Tapered Head-Small Bevel)



CODE NO	mm	mm	
H20T-125SB	125	1.2	6

H21-125SB

Electronics End Cutter



CODE NO	mm	mm	
H21-125SB	125	1.0	6

H23S-130

Electronics Short Needle Nose Pliers (Serrated)



CODE NO	mm	
H23S-130	130	6

H23F-130

Electronics Short Needle Nose Pliers (Flat)



CODE NO	mm	
H23F-130	130	6

H24-130

Electronics Bent Needle Nose Pliers



CODE NO	mm	
H24-130	130	6

H25-155

Electronics Long Needle Nose Pliers



CODE NO	mm	
H25-155	155	6

H26-130

Electronics Round Nose Pliers



CODE NO	mm	
H26-130	130	6

H27-130

Electronics Flat Nose Pliers



CODE NO	mm	
H27-130	130	6

H20-W04

4 Piece Electronics Pliers Set (in Vinyl Wallet)



CODE NO

H20-W04

4PC: H20-125SB, H21-125SB, H23S-130, H27-130



1

H20-W06

6 Piece Electronics Pliers Set (in Vinyl Wallet)



CODE NO

H20-W06

6 PC: H20-125SB, H21-125SB, H23S-130, H25-155, H26-130, H27-130



1

H30-W10

10 Piece Electronics Pliers and Screwdriver Set (in Vinyl Wallet)



CODE NO

H30-W10

H20-125SB, H23S-130, H25S-155, H43-120-SA

H01 1.5x40, 2.0x60, 2.5x80, 3.0x80 mm, H02 PH00x60, PH0x60 mm



1

Screw Joint Cutters

- Screw joint for high precision
- For ultra fine cutting work
- Ground cutting edges
- Smooth operation leaf springs



Special Tool Steel

H20S-120SB

Electronics Diagonal Cutter (Small Bevel)



CODE NO

H20S-120SB

mm

120

mm

1.0

mm

6

H20S-120FL

Electronics Diagonal Cutter (Flush Cut)



CODE NO

H20S-120FL

mm

120

mm

1.0

mm

6

SMD/SMT Chip Cutters

- For quick and easy removal of SMD/SMT components from PCBs
- Slender and compact design
- Precise sharp cutting edges
- Spring loaded ergonomic grips



H30E-115FL

End Cutter for SMD Chips (Flush Cut)



CODE NO

H30E-115FL

mm

115

TIP THICKNESS mm

3.0

mm

6

H30B-115FL

45° Oblique Cutter for SMD Chips (Flush Cut)



CODE NO

H30B-115FL

mm

115

TIP LENGTH mm

7.0

mm

6

8 Electronic Screwdrivers and Pliers

H50-115 Series

Electronics Diagonal Cutters



Special Tool Steel

CODE NO	mm	∅ mm	
H50-115SB	115	1.2	6
H50-115FL	115	1.0	6

H50T-115SB

Electronics Diagonal Cutters (Tapered Head)



Special Tool Steel

CODE NO	mm	∅ mm	
H50T-115SB	115	1.2	6

H51-115SB

Electronics End Cutter



Special Tool Steel

CODE NO	mm	∅ mm	
H51-115SB	115	1.0	6

H52-125

Electronics Combination Pliers



Special Tool Steel

CODE NO	mm	∅ mm	
H52-125	125	1.2	6

H53S-130

Electronics Short Needle Nose Pliers (Serrated)



Special Tool Steel

CODE NO	mm	
H53S-130	130	6

H53F-130

Electronics Short Needle Nose Pliers (Flat)



Special Tool Steel

CODE NO	mm	
H53F-130	130	6

H54S-130

Electronics Bent Needle Nose Pliers (Serrated)



Special Tool Steel

CODE NO	mm	
H54S-130	130	6

H50-W04

4 Piece Electronics Pliers Set (in Vinyl Wallet)



Special Tool Steel

CODE NO	
H50-W04	1

4 PC: H50-115SB, H51-115SB, H52-125, H53S-130

H55-145

Electronics Long Needle Nose Pliers



Special Tool Steel

CODE NO	mm	
H55-145	145	6

H56-130

Electronics Round Nose Pliers



Special Tool Steel

CODE NO	mm	
H56-130	130	6

H57-125

Electronics Flat Nose Pliers



Special Tool Steel

CODE NO	mm	
H57-125	125	6

H50-W06

6 Piece Electronics Pliers Set (in Vinyl Wallet)



Special Tool Steel

CODE NO	
H50-W06	1

6 PC: H50-115SB, H51-115SB, H52-125, H53S-130, H55-145, H57-125

H30S-110SB

Electronics Diagonal Cutters



StainlessSteel

CODE NO	mm	Ømm	
H30S-110SB	110	1.0	6
For display carded delivery = Item code + X			6

H31S-120SB

Electronics End Cutter



StainlessSteel

CODE NO	mm	Ømm	
H31S-120SB	120	1.0	6
For display carded delivery = Item code + X			6

H34S-115

Electronics Bent Needle Nose Pliers



StainlessSteel

CODE NO	mm	
H34S-115	115	6
For display carded delivery = Item code + X		6

H30T-110SB

Electronics Diagonal Cutters (Tapered Head)



StainlessSteel

CODE NO	mm	Ømm	
H30T-110SB	110	1.0	6
For display carded delivery = Item code + X			6

H33S-120

Electronics Short Needle Nose Pliers (Serrated)



StainlessSteel

CODE NO	mm	
H33S-120	120	6
For display carded delivery = Item code + X		6


H35S-140

Electronics Long Needle Nose Pliers



StainlessSteel

CODE NO	mm	
H35S-140	140	6
For display carded delivery = Item code + X		6

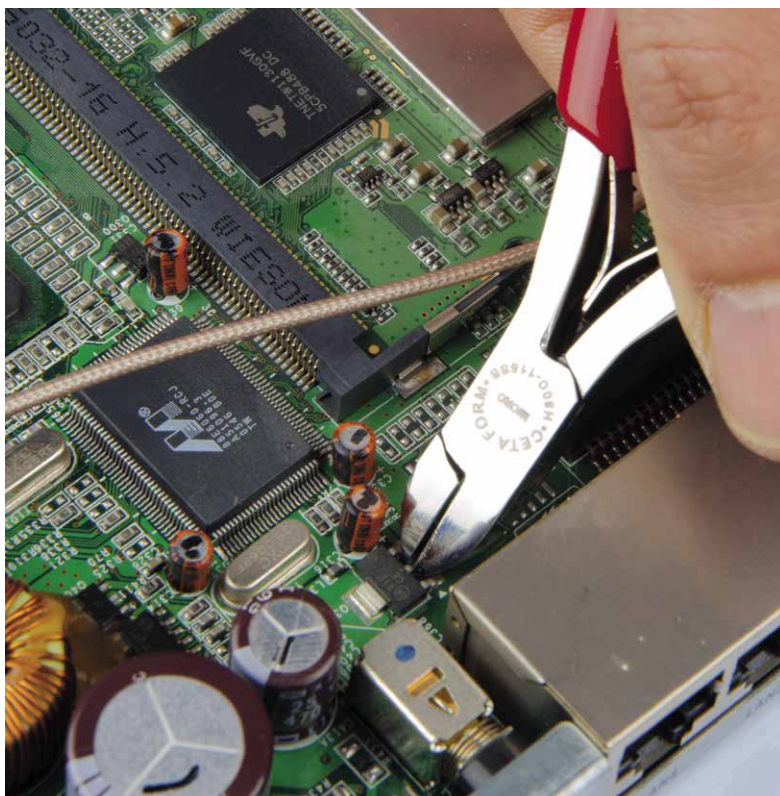

H30-W06

6 Piece Electronics Pliers Set (in Vinyl Wallet)



StainlessSteel

CODE NO	
H30-W06	1
6 PC: H30S-110SB, H31S-120SB, H33S-120, H35S-140, H36-120, H37-120	

8 Electronic Screwdrivers and Pliers

H40-AA-SA Pointed Tweezers



StainlessSteel

CODE NO	mm	
H40-AA-SA	130	1

H40-00-SA Pointed Tweezers



StainlessSteel

CODE NO	mm	
H40-00-SA	120	1

H40-1-SA Pointed Tweezers



StainlessSteel

CODE NO	mm	
H40-1-SA	120	1

H40-3C-SA Pointed Tweezers



StainlessSteel

CODE NO	mm	
H40-3C-SA	110	1

H40-5-SA Needle Pointed Tweezers



StainlessSteel

CODE NO	mm	
H40-5-SA	110	1

H40-7-SA Needle Pointed Tweezers (Bent)



StainlessSteel

CODE NO	mm	
H40-7-SA	120	1

H40-2A-SA Round Slim Shape Tweezers



StainlessSteel

CODE NO	mm	
H40-2A-SA	115	1

H43G-150-SA Pointed Tweezers (Centering Pin)



StainlessSteel

CODE NO	mm	
H43G-150-SA	150	1

H43G-150B-SA Pointed Tweezers (Centering Pin-Bent)



StainlessSteel

CODE NO	mm	
H43G-150B-SA	155	1

H43 Series Blunt Shape Tweezers-Serrated



StainlessSteel

CODE NO	mm	
H43-120-SA	120	1
H43-140-SA	140	1

H44-160-SA Cross-Over Tweezers



StainlessSteel

CODE NO	mm	
H44-160-SA	160	1

H44-160B-SA Cross-Over Tweezers (Bent)



StainlessSteel

CODE NO	mm	
H44-160B-SA	160	1

H44T-160-SA Cross-Over Tweezers



StainlessSteel

CODE NO	mm	
H44T-160-SA	160	1

H43-125B-SA Blunt Shape Tweezers - Serrated (Bent)



StainlessSteel

CODE NO	mm	
H43-125B-SA	125	1

H45D-150-SA Insulated Tweezers



StainlessSteel

CODE NO	mm	
H45D-150-SA	150	1

H45D-150B-SA Insulated Tweezers (Bent)



StainlessSteel

CODE NO	mm	
H45D-150B-SA	150	1

H40-R04 4 Piece Tweezers Set



StainlessSteel

CODE NO		
H40-R04		10
H44-115-SA	H43T-110-SA	
H43-120-SA	H43-125B-SA	

H55
Gas Soldering Iron



Adjustable power, spare tip available

CODE NO	mm	
H55	185	1

H55-SC010
Spare Conical Tip (for H55)



CODE NO	mm	
H55-SC010	1.0	6 •

H59AL
Aluminum Desoldering Pump (PTFE Nozzle)



CODE NO	mm	
H59AL	195	6 •

H60-3
3 Piece Soldering Aid Kit



Hook, reamer, knife, scraper, brush and fork tips in a single kit

CODE NO	mm	
H60-3	175	6

H57-1516
Desoldering Braid



CODE NO	W / mm	m	
H57-1516	1.5	1.5	1

H62-YC
Anti Static Wrist Strap (with Cord)



Protection from static electricity, resistance: < 10K Ohm (Wrist Strap), 1M Ohm 10% (Cord)

CODE NO	
H62-YC	6

H63
Fiberglass Scratch Brush



For cleaning of contacts, rotary mechanism, plastic casing

CODE NO	mm	
H63	120	6 •

H64
Dust Brush



Black bristles and wooden handle

CODE NO	mm	
H64	160	6 •

H65-10
10 Piece Plastic Alignment Kit



CODE NO	
H65-10	1

8 Electronic Screwdrivers and Pliers

H99-N80 80 Piece Electro Technician Tool Set

80 PIECE

- The perfect tool kit for the professional electro technician
- Can be ordered as contents only or in Raptor tool cases



B09 3 PC
5x5.5, 6x7, 8x10 mm



B21-B
150 mm



LT/9 9 PC
1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm



G09-VT30
3.0 mm



E01-41-0160
160 mm



E06-41-0140
140 mm



E15-41-0160
160 mm



E25-AS06



E25-MIC



F10M 2 PC
4.5x100, 6.0x150 mm



H01 4 PC
1.5, 2, 2.5, 3 mm



H02 2 PC
PH00, PH0



H04 3 PC
T5, T8, T10



H99-JK-04
4-in-1



G80-MDC2



Z/40
(4.0/4.0) x 100 mm



Z/12
(PH1/PH2) x 100 mm



H20-125SB
125 mm



H21-125SB
125 mm



H23S-130
130 mm



H27-130
130 mm



H43-120-SA
120 mm



H43-125B-SA
125 mm



H59AL
195 mm



H60-3 3 PC
175 mm





H62-YC



H63
120 mm



H64
160 mm



H65-10 10 PC



J17-190
190 mm



J46CPM
9 mm



J75-R06 6 PC



P05-0316
3M x 16 mm



R11-PEN
100 Lumen



R20RP
Ø30 x 175 mm



R36-1



R36-2



R36-3



R36-4



C00WLR3023C
30W / 400°C / 230V

Weller



H57-1516
Ø 1.2 mm



Insulation Tape

3M



R21P



Solder Tip Cleaner

STANNOL



80 Piece Electro Technician Tool Set

Contents Only

Sets in Tool Boxes

(H99-N80+A32)

(H99-N80+A32H)



CODE NO

H99-N80

H99-N80A32

H99-N80A32H

9 Plumbing Tools

147 | 148




I01 Series

Swedish Pattern Pipe Wrenches (90° Jaws)

DIN 5234, TS 3796-C




CODE NO	∅ "	mm	
I01-10	1	320	1
I01-15	1-1/2	425	1
I01-20	2	555	1

I02 Series

Swedish Pattern Pipe Wrenches (S Jaws)

DIN 5234, TS 3796-C





CODE NO	∅ "	mm	
I02-10	1	320	1
I02-15	1-1/2	425	1
I02-20	2	535	1

I01-/A Series

Spare Nuts (for I01, I02 Series)




CODE NO		
I01-10/A	1"	6
I01-15/A	1-1/2"	6
I01-20/A	2"	6

I06-2 Series

Heavy Duty Pipe Wrenches




CODE NO	∅ "	mm	
I06-12-2	2	300	1
I06-18-2	2-1/2	450	1
I06-36-2	5	900	1



I12-40

Mini Chain Pipe Wrench





CODE NO	∅ "	mm	
I12-40	4	300	1

I12-40R

Spare Chain (for I12-40)



CODE NO		
I12-40R	I12-40	1



9 Plumbing Tools

I21-42-2
PPRC Pipe Cutters (Adjustable Capacity)



CODE NO	∅ max. mm	mm	
I21-42-2	42	230	6



I21-42-2R	for I21-42-2	1
-----------	--------------	---

I21-63-2
PPRC Pipe Cutters (Adjustable Capacity)

new



CODE NO	∅ max. mm	mm	
I21-63-2	63	290	6



I21-63-2R	for I21-63-2	1
-----------	--------------	---

I20-190
PPRC Pipe Cutter - Basic



CODE NO	∅ max. mm	mm	
I20-190	42	190	8



I20-190R	for I20-190	1
----------	-------------	---

I30-2
Steel Pipe Cutter



CODE NO	∅ mm	mm	
I30-2	10 - 60	380	1



I30-2R	32	1 pk.
--------	----	-------

I32-2
Tubing Cutter



CODE NO	∅ mm	mm	
I32-2	3 - 30	150	12



I32-2R	18	1 pk.
--------	----	-------

I34
Telescopic Tubing Cutter



CODE NO	∅ mm	mm	
I34	6-35	150	5



I34-2R	18	1 pk.
--------	----	-------

I38-2
Mini Tubing Cutter



CODE NO	∅ mm	mm	
I38-2	3 - 16	50	50



I32-2R	18	1 pk.
--------	----	-------



10 Cutting Tools and Files




149 | 159



J04-250L
Aviation Tin Snips (Left Cut)






Stainless steel | max. 0.9 mm | Sold rolled steel | max. 1.2 mm

CODE NO			
J04-250L	40	250	6

J04-250R
Aviation Tin Snips (Right Cut)




Stainless steel | max. 0.9 mm | Sold rolled steel | max. 1.2 mm

CODE NO			
J04-250R	40	250	6

J04-R03
3 Piece Aviation Tin Snip Set (in Roll Pouch)



CODE NO	
J04-R03	1






J04-250L J04-250S J04-250R

J04-250S
Aviation Tin Snips (Straight Cut)



Stainless steel | max. 0.9 mm | Sold rolled steel | max. 1.2 mm

CODE NO			
J04-250S	40	250	6

J04-300S
Aviation Tin Snips (Long Cut)





Stainless steel | max. 0.9 mm | Sold rolled steel | max. 1.2 mm

CODE NO			
J04-300S	83	300	6

J01 Series
Punch Snips






Stainless steel | max. 0.5 mm | Sold rolled steel | max. 1.0 mm

CODE NO		DIRECTION	
J01-250L	250	left	6
J01-250R	250	right	6

J04H-250L
Offset Aviation Tin Snips (Left Cut)






Stainless steel | max. 0.9 mm | Sold rolled steel | max. 1.2 mm

CODE NO			
J04H-250L	40	250	6

J04H-250R
Offset Aviation Tin Snips (Right Cut)






Stainless steel | max. 0.9 mm | Sold rolled steel | max. 1.2 mm

CODE NO			
J04H-250R	40	250	6

J06-2 Series
English Pattern Snips






Stainless steel | max. 0.5 mm | Sold rolled steel | max. 1.0 mm

CODE NO			
J06-200-2	46	200	6
J06-250-2	57	250	6
J06-300-2	68	300	6

10 Cutting Tools and Files

J17-190
Multi-Purpose Cutter (Straight)



CODE NO	 mm	 mm	
J17-190	50	190	6




J17-190B
Multi-Purpose Cutter (Offset)



CODE NO	 mm	 mm	
J17-190B	40	190	6




J16-180S
Jeweller's Snips (Straight)



CODE NO	 mm	 mm	
J16-180S	31	180	6




J16-180B
Jeweller's Snips (Curved)



CODE NO	 mm	 mm	
J16-180B	29	180	6



J18 Series
Stationery Scissors



CODE NO	 mm	 mm	
J18-230	84	230	10
J18-250	104	250	10



J22-215R
Pruning Shears (Revolving Handle)



CODE NO	 mm	
J22-215R	210	6
J22-215RR	Spare Blade	1



J22-215P
Pruning Shears (Forged Aluminium Handles)



CODE NO	 mm	
J22-215P	210	6
J22-215PR	Spare Blade	1



J22-215C
Pruning Shears (Cast Aluminium Body)



CODE NO	 mm	
J22-215C	215	6
J22-215CR	Spare Blade	1

E61-K1160
KEVLAR Scissors





CODE NO	 mm	
E61-K1160	160	12

J22A-200
Anvil Pruner



Allows cut against a fixed base plate

CODE NO	 mm	
J22A-200	200	12
J22A-200R	Spare Blade	1

J23-190
Trimming Shears



CODE NO	 mm	 mm	
J23-190	53	190	10

J19-220
Mitre Shears



CODE NO	DEGREE	 mm	
J19-220	45-135°	220	1

J10 Series
Bolt Cutters



CODE NO	mm "	mm	
J10-450	450 - 18"	6	1
J10-600	600 - 24"	8	1
J10-750	750 - 30"	10	1
J10-900	900 - 36"	12	1

J30-300PRO
Professional Hacksaw Frame (in-Handle Fixing System)

new



CODE NO	mm	
J30-300PRO	400	6

J30-300
Hacksaw Frame (in-Handle Fixing System)



CODE NO	mm	
J30-300	430	6

J31-300
Hacksaw Frame (Softgrip)

new



CODE NO	mm	
J31-300	430	6

J32-300
Hacksaw Frame



CODE NO	mm	
J32-300	425	6

J10-R Series
Replacement Blades (for J10 Series)



CODE NO		
J10-450R	J10-450	1
J10-600R	J10-600	1
J10-750R	J10-750	1
J10-900R	J10-900	1

J36-150
Mini Hacksaw



CODE NO	mm	
J36-150	260	12

J44-067
Wallboard Saw



CODE NO	mm/inch	mm	
J44-067	160-6"	315	10

J35.B Series
Hacksaw Blades (HSS Bi-Metal) - 10 Pieces



Unbreakable

The code represents a 10 piece package

CODE NO	mm	TPI*	
J35-18B	300	18	10 pk.
J35-24B	300	24	10 pk.

*TPI: Teeth per inch

J36-R
Mini Hacksaw Blades - 10 Pieces



The code represents a 10 piece package

CODE NO	mm	TPI*	
J36-R	150	18	10 pk.

*TPI: Teeth per inch

J40 Series
Holesaws (HSS Bi-Metal)

new
design



DuraMAX quality, super HSS alloy teeth, 4/6 variable pitch tooth design, spring steel body

CODE NO	mm	"	mm	
J40-014	14	9/16	55	6
J40-016	16	5/8	55	6
J40-017	17	11/16	55	6
J40-019	19	3/4	50	6
J40-020	20	25/32	50	6
J40-021	21	13/16	50	6
J40-022	22	7/8	50	6
J40-024	24	15/16	50	6
J40-025	25	1	50	6
J40-027	27	1-1/16	50	6
J40-029	29	1-1/8	50	6
J40-030	30	1-3/16	50	6
J40-032	32	1-1/4	50	6
J40-033	33	1-5/16	50	6
J40-035	35	1-3/8	50	6
J40-037	37	1-7/16	50	6
J40-038	38	1-1/2	44	6
J40-040	40	1-9/16	44	6
J40-041	41	1-5/8	44	6
J40-043	43	1-11/16	44	6
J40-044	44	1-3/4	44	6
J40-046	46	1-13/16	44	6
J40-048	48	1-7/8	44	6
J40-051	51	2	44	6
J40-052	52	2-1/16	44	6
J40-054	54	2-1/8	44	6
J40-057	57	2-1/4	44	6
J40-060	60	2-3/8	44	6
J40-064	64	2-1/2	44	6
J40-065	65	2-9/16	44	6
J40-067	67	2-5/8	44	6
J40-068	68	2-11/16	44	6
J40-070	70	2-3/4	44	6
J40-073	73	2-7/8	44	6
J40-076	76	3	44	6
J40-079	79	3-1/8	44	6
J40-083	83	3-1/4	44	6
J40-086	86	3-3/8	44	6
J40-089	89	3-1/2	44	6
J40-092	92	3-5/8	44	6
J40-095	95	3-3/4	44	6
J40-098	98	3-7/8	44	6
J40-102	102	4	44	6
J40-105	105	4-1/8	44	6
J40-111	111	4-3/8	44	6
J40-114	114	4-1/2	44	6
J40-121	121	4-3/4	44	6
J40-127	127	5	44	6
J40-140	140	5-1/2	44	6
J40-152	152	6	44	6

10 Cutting Tools and Files

J40-A1

Holesaw Arbor #1 (for J40 Series) - Hexagon Shank



Drive: 11 mm (7/16"), Yiv: 1/2" - 20 UNF

CODE NO	mm	mm	
J40-A1	14- 29	93	10

J40-A2

Holesaw Arbor #2 (for J40 Series) - Hexagon Shank



Drive: 11 mm (7/16"), Yiv: 5/8" - 18 UNF

CODE NO	mm	mm	
J40-A2	30-152	116	10

J40R-ME150

Reciprocating Saw Blade (for Metal) - 5 Pieces



For thin sheet steel, pipes and shapes, 18 TPI teeth, bimetal body
The code represents a package with indicated quantity

CODE NO	Ref.	mm	
J40R-ME150	S922EF	150	5

J40R-MB150

Reciprocating Saw Blade (for Metal) - 5 Pieces



For thick sheet steel, pipes and shapes, 14 TPI teeth, bimetal body
The code represents a package with indicated quantity

CODE NO	Ref.	mm	
J40R-MB150	S922BF	150	5

J40-A3

Holesaw Arbor #3 (for J40 Series) - SDS-Plus Shank



Drive: SDS-Plus, Yiv: 1/2" - 20 UNF

CODE NO	mm	mm	
J40-A3	14- 29	130	6

J40-A4

Holesaw Arbor #4 (for J40 Series) - SDS-Plus Shank



Drive: SDS-Plus, Yiv: 5/8" - 18 UNF

CODE NO	mm	mm	
J40-A4	30-152	153	6

J40R-MB225

Reciprocating Saw Blade (for Metal)



For thick sheet steel, pipes and shapes, 14 TPI teeth, metal body
The code represents a package with indicated quantity

CODE NO	Ref.	mm	
J40R-MB225	S1122BF	225	5

J40R-DH225

Reciprocating Saw Blade (for Wood & Metal)



For studded wood, sheet steel, pipes and aluminium shapes, 10 TPI teeth, bimetal body
The code represents a package with indicated quantity

CODE NO	Ref.	mm	
J40R-DH225	S1122HF	225	5

J40-PD Series

Spare HSS Pilot Drills (for Holesaw Arbors)



CODE NO		
J40-PD1	for A1 and A3	6•
J40-PD2	for A2 and A4	6•

J40-P13

13 Piece Holesaw Set

DuraMAX



CODE NO	
J40-P13	1

J40 20, 22, 25, 32, 35, 40, 44, 51, 60, 64 mm
J40-A1 1/2"-20 UNF, J40-A2 5/8"-18 UNF, L 4 mm

J40R-PV210F

Reciprocating Saw Blade (For Pallet Repair)



For repairing pallets, 10/14 TPI teeth, bimetal body
The code represents a package with indicated quantity

CODE NO	Ref.	mm	
J40R-PV210F	S722VFR	200	5

J40R-WL240

Reciprocating Saw Blade (for Wood) - 5 Pieces



For hard wood, knotless wood, tree pruning, 4/5 TPI teeth, HCS body
The code represents a package with indicated quantity

CODE NO	Ref.	mm	
J40R-WL240	S1531L	240	5

J40J-WB100

Jigsaw Blade (for Wood-Basic) - 5 Pieces



8 TPI for cutting hard and soft woods, plywood and plastics, medium-rough cuts, HCS, T shank

The code represents a 5 piece package

CODE NO	Ref.	mm	pk
J40J-WB100	T111C	100	50 pk

J40J-WF100

Jigsaw Blade (for Wood-Fast Cutting) - 5 Pieces



6 TPI for cutting hard and soft woods, plywood and plastics, straight and very fast cuts, HCS, T shank

The code represents a 5 piece package

CODE NO	Ref.	mm	pk
J40J-WF100	T144D	100	50 pk

J45CPM

C-Pro Snap-Off Knife (Metal Body) - 18 mm



Ships with 2xJ45-R blades

CODE NO	mm	mm	pk
J45CPM	155	18	24 •
For display carded delivery = Item code + X			12

J45CP

C-Pro Snap-Off Knife - 18 mm



Ships with 2xJ45-R blades

CODE NO	mm	mm	pk
J45CP	165	18	24 •
For display carded delivery = Item code + X			12

J45CM

Compact Snap-Off Knife (Space Grey) - 18 mm



Ships with 2xJ45-R blades

CODE NO	mm	mm	pk
J45CM	163	18	24 •

J40J-WF100C

Jigsaw Blade (for Wood-Fast/Curved Cutting) - 5 Pieces



6 TPI for cutting hard and soft woods, plywood and plastics, fast coarse, curved cuts, HCS, T shank

The code represents a 5 piece package

CODE NO	Ref.	mm	pk
J40J-WF100C	T244D	100	50 pk

J40J-WC100

Jigsaw Blade (for Wood-Clean Cutting) - 5 Pieces



5-6 TPI for cutting hard and soft woods, plywood and plastics, fine clean cuts, HCS, T shank

The code represents a 5 piece package

CODE NO	Ref.	mm	pk
J40J-WC100	T101D	100	50 pk

J45C

Compact Snap-Off Knife - 18 mm



Ships with 2xJ45-R blades

CODE NO	mm	mm	pk
J45C	163	18	24 •

J45C/D

Compact Utility Knife (Dial Lock) - 18 mm



Ships with 1xJ45-R blade

CODE NO	mm	mm	pk
J45C/D	155	18	30

J45C/T

Compact Snap-Off Knife (Dial Lock-Carpet Tucker) - 18 mm



Ships with 1xJ45-R blade

CODE NO	mm	mm	pk
J45C/T	160	18	30

J40J-MB075

Jigsaw Blade (for Metal-Basic) - 5 Pieces



24 TPI for cutting metals up to 3 mm thickness, straight cuts, HSS, T shank

The code represents a 5 piece package

CODE NO	Ref.	mm	pk
J40J-MB075	T118A	75	50 pk

J40J-A100

Jigsaw Blade (for Aluminium) - 5 Pieces



8 TPI for cutting aluminium/non-ferrous metals and plastics, straight cuts, HSS, T shank

The code represents a 5 piece package

CODE NO	Ref.	mm	pk
J40J-A100	T127D	100	50 pk

J47SPQ

Foldable Trimming Knife (Trapezoid Blade)



Spare blade codes




CODE NO	mm	mm	pk
J47SPQ	158	19	12 •

J47DUO

2-in-1 Foldable Trimming Knife (Cutter/Scraper)

new



CODE NO	mm	mm	pk
J47DUO	175	19	6

J47TK-S

Safety Trimming Knife (Auto Retracting - Metal Body)



Trapezoid Blade

CODE NO	mm	mm	pk
J47TK-S	175	19	10

10 Cutting Tools and Files

J47TK

Trimming Knife (Metal Body)



CODE NO	mm	mm	
J47TK	175	19	10

J47C-S

Safety Trimming Knife (Auto Retracting - Plastic Body)



CODE NO	mm	mm	
J47C-S	150	19	30

J49M

Razor Blade Scraper (Metal Body)



CODE NO	mm	mm	
J49M	105	19	24

J46CPM

C-Pro Snap-Off Knife (Metal Body) - 9 mm



Stainless steel blade housing, auto-lock mechanism, ships with 1xJ46-R blade

CODE NO	mm	mm	
J46CPM	145	9	36

J46SL

Slim9 Steel Body Utility Knife - 9 mm



Slim design, stainless steel body, auto-lock mechanism, ships, with 1xJ46-R blade

CODE NO	mm	mm	
J46SL	145	9	24

J46C

Compact Snap-Off Knife - 9 mm



Stainless steel body, auto-lock mechanism, ships, with 1xJ46-R blade

CODE NO	mm	mm	
J46C	150	9	36

J45-RDM

18 mm Snap-Off Knife Blade - 10 Pieces

DuraMAX



The code represents a 10 piece package

CODE NO	mm	mm	SEGMENTS	
J45-RDM	108	18	7	10 pk. •

J45-R

18 mm Snap-Off Knife Blade - 10 Pieces



The code represents a 10 piece package

CODE NO	mm	mm	SEGMENTS	
J45-R	108	18	12	10 pk. •

J46-R

9 mm Snap-Off Knife Blade - 10 Pieces



The code represents a 10 piece package

CODE NO	mm	mm	SEGMENTS	
J46-R	85	9	7	10 pk. •

J46-R/30

9 mm Snap-Off Knife Blade (Precision Art) - 10 Pieces



The code represents a 10 piece package

CODE NO	mm	mm	SEGMENTS	
J46-R/30	85	9	6	10 pk. •

J47-R

Trapezoid Trimming Knife Blade - 10 Pieces



The code represents a 10 piece package

CODE NO	mm	mm	
J47-R	60	19	10 pk. •

J47-RS

Trapezoid Trimming Knife Blade (with Hole) - 10 Pieces



Spare blade for J47C-S

The code represents a 10 piece package

CODE NO	mm	mm	
J47-RS	60	19	10 pk. •

J47-RH

Hooked Trimming Knife Blade - 10 Pieces




The code represents a 10 piece package

CODE NO	mm	mm	
J47-RH	49	19	10 pk. •

J49-R

Razor Blade - 10 Pieces



The code represents a 10 piece package

CODE NO	mm	mm	
J49-R	38.3	19	10 pk. •

J80-200

Flat Scraper

DIN 8350 Form A



CODE NO	mm	mm	
J80-200	20	200	10

J81-200

Triangular Scraper

DIN 8350 Form B



CODE NO	mm	mm	
J81-200	10	200	10

J82 Series

Triangular Hollow Scraper



CODE NO	mm	mm	
J82-150	14	150	10
J82-200	16	200	10

J83-200

Triangular Spoon Scraper



CODE NO	mm	mm	
J83-200	14	200	6


Ceta Form Files




E Engineer's Files – for stock removal and surface finish requirements on machined components.


S Saw Files – for sharpening wood working saws and similar thin edges.

R Rasps – used on wood, leather and similar soft materials for rapid stock removal.

 **Double cut:**
Mainly for steel and other materials.

 **Single cut:**
For a good surface finish, sharpening saws, lathe filing and fitters requirements.


 **Rasp cut:**
For soft materials and wood.
Produces a rough surface.



J55 Series Flat Files




Double-cut surfaces

CODE NO	mm "	mm	
Bastard			
J55-106	150 – 6"	16	12•
J55-108	200 – 8"	20	12•
J55-110	250 – 10"	25	12•
J55-112	300 – 12"	30	6•
Second			
J55-206	150 – 6"	16	12•
J55-208	200 – 8"	20	12•
J55-210	250 – 10"	25	12•
J55-212	300 – 12"	30	6•
Smooth			
J55-306	150 – 6"	16	12•
J55-308	200 – 8"	20	12•
J55-310	250 – 10"	25	12•
J55-312	300 – 12"	30	6•

J55-H Series Flat Files (Softgrip Handle)




Same specs as J55 series,
with dual-component ergonomic handle

CODE NO	mm "	mm	
Bastard			
J55-106H	150 – 6"	16	6
J55-108H	200 – 8"	20	6
J55-110H	250 – 10"	25	6
J55-112H	300 – 12"	30	6
Second			
J55-206H	150 – 6"	16	6
J55-208H	200 – 8"	20	6
J55-210H	250 – 10"	25	6
J55-212H	300 – 12"	30	6
Smooth			
J55-306H	150 – 6"	16	6
J55-308H	200 – 8"	20	6
J55-310H	250 – 10"	25	6
J55-312H	300 – 12"	30	6

J55F Series Tapered Flat Files




Double-cut surfaces

CODE NO	mm "	mm	
Second			
J55F-206	150 – 6"	16	12•
J55F-208	200 – 8"	20	12•
J55F-210	250 – 10"	25	12•
J55F-212	300 – 12"	30	6•

J55F-H Series Tapered Flat Files (Softgrip Handle)




Same specs as J55F series,
with dual-component ergonomic handle

CODE NO	mm "	mm	
Second			
J55F-206H	150 – 6"	16	6
J55F-208H	200 – 8"	20	6
J55F-210H	250 – 10"	25	6
J55F-212H	300 – 12"	30	6

J55W-206 Warding File




Double-cut surfaces

CODE NO	mm "	mm	
Second			
J55W-206	150 – 6"	15	12•

J55W-206H Warding File (Softgrip Handle)



Double-cut surfaces

CODE NO	mm "	mm	
Second			
J55W-206H	150 – 6"	15	6

10 Cutting Tools and Files

J56 Series Half-Round Files



Double-cut surfaces,
edges and surfaces tapered to the tip



CODE NO	mm "	mm	
Bastard			
J56-106	150 – 6"	16	12 •
J56-108	200 – 8"	20	12 •
J56-110	250 – 10"	24.5	12 •
J56-112	300 – 12"	29.5	6 •
Second			
J56-206	150 – 6"	16	12 •
J56-208	200 – 8"	20	12 •
J56-210	250 – 10"	24.5	12 •
J56-212	300 – 12"	29.5	6 •
Smooth			
J56-306	150 – 6"	16	12 •
J56-308	200 – 8"	20	12 •
J56-310	250 – 10"	24.5	12 •
J56-312	300 – 12"	29.5	6 •

J56-H Series Half-Round Files (Softgrip Handle)



Same specs as J56 series,
with dual-component ergonomic handle



CODE NO	mm "	mm	
Bastard			
J56-106H	150 – 6"	16	6
J56-108H	200 – 8"	20	6
J56-110H	250 – 10"	24.5	6
J56-112H	300 – 12"	29.5	6
Second			
J56-206H	150 – 6"	16	6
J56-208H	200 – 8"	20	6
J56-210H	250 – 10"	24.5	6
J56-212H	300 – 12"	29.5	6
Smooth			
J56-306H	150 – 6"	16	6
J56-308H	200 – 8"	20	6
J56-310H	250 – 10"	24.5	6
J56-312H	300 – 12"	29.5	6

J57 Series Round Files



Double-cut surfaces,
edges and surfaces tapered to the tip



CODE NO	mm "	mm	
Bastard			
J57-106	150 – 6"	6	12 •
J57-108	200 – 8"	7.5	12 •
J57-110	250 – 10"	9.5	12 •
J57-112	300 – 12"	12	6 •
Second			
J57-206	150 – 6"	6	12 •
J57-208	200 – 8"	7.5	12 •
J57-210	250 – 10"	9.5	12 •
J57-212	300 – 12"	12	6 •

J57-H Series Round Files (Softgrip Handle)



Same specs as J57 series,
with dual-component ergonomic handle



CODE NO	mm "	mm	
Bastard			
J57-106H	150 – 6"	6	6
J57-108H	200 – 8"	7.5	6
J57-110H	250 – 10"	9.5	6
J57-112H	300 – 12"	12	6
Second			
J57-206H	150 – 6"	6	6
J57-208H	200 – 8"	7.5	6
J57-210H	250 – 10"	9.5	6
J57-212H	300 – 12"	12	6

J58 Series Square Files



Double-cut surfaces,
edges and surfaces tapered to the tip



CODE NO	mm "	mm	
Bastard			
J58-106	150 – 6"	6	12 •
J58-108	200 – 8"	8	12 •
J58-110	250 – 10"	9.5	12 •
J58-112	300 – 12"	12	6 •
Second			
J58-206	150 – 6"	6	12 •
J58-208	200 – 8"	8	12 •
J58-210	250 – 10"	9.5	12 •
J58-212	300 – 12"	12	6 •

J58-H Series Square Files (Softgrip Handle)



Same specs as J58 series,
with dual-component ergonomic handle



CODE NO	mm "	mm	
Bastard			
J58-106H	150 – 6"	6	6
J58-108H	200 – 8"	8	6
J58-110H	250 – 10"	9.5	6
J58-112H	300 – 12"	12	6
Second			
J58-206H	150 – 6"	6	6
J58-208H	200 – 8"	8	6
J58-210H	250 – 10"	9.5	6
J58-212H	300 – 12"	12	6



J59 Series Three Square Files



Double-cut surfaces,
edges and surfaces tapered to the tip



CODE NO	mm "	mm	
Bastard			
J59-106	150 – 6"	11	12•
J59-108	200 – 8"	15	12•
J59-110	250 – 10"	17.5	12•
J59-112	300 – 12"	20	6•
Second			
J59-206	150 – 6"	11	12•
J59-208	200 – 8"	15	12•
J59-210	250 – 10"	17.5	12•
J59-212	300 – 12"	20	6•

J59-H Series Three Square Files (Softgrip Handle)



Same specs as J59 series,
with dual-component ergonomic handle



CODE NO	mm "	mm	
Bastard			
J59-106H	150 – 6"	11	6
J59-108H	200 – 8"	15	6
J59-110H	250 – 10"	17.5	6
J59-112H	300 – 12"	20	6
Second			
J59-206H	150 – 6"	11	6
J59-208H	200 – 8"	15	6
J59-210H	250 – 10"	17.5	6
J59-212H	300 – 12"	20	6

J72-A Series 5 Piece File Sets (Combination A)



CODE NO	
J72-0851A	1
200 mm	
J55-108H, J55-208H, J56-108H, J57-108H, J58-108H	
J72-1051A	1
250 mm	
J55-110H, J55-210H, J56-110H, J57-110H, J58-110H	

J64 Series Milled Files



Single cut surfaces, rounded on one edge



CODE NO	mm "	mm	
Second			
J64-206	150 – 6"	16	12•
J64-208	200 – 8"	20	12•
J64-210	250 – 10"	25	12•
J64-212	300 – 12"	30	6•

J64-H Series Milled Files (Softgrip Handle)



Same specs as J64 series, with
dual-component ergonomic handle



CODE NO	mm "	mm	
Second			
J64-206H	150 – 6"	16	6
J64-208H	200 – 8"	20	6
J64-210H	250 – 10"	25	6
J64-212H	300 – 12"	30	6

J72-B Series 5 Piece File Sets (Combination B)



CODE NO	
J72-0851B	1
200 mm - Bastard Cut	
J55-108H, J56-108H, J57-108H, J58-108H, J59-108H	
J72-0852B	1
200 mm - Second Cut	
J55-208H, J56-208H, J57-208H, J58-208H, J59-208H	

J65 Series Taper Saw Files



Double-cut surfaces,
edges and surfaces tapered to the tip



CODE NO	mm "	mm	
Bastard			
J65-106	150 – 6"	12	12•
J65-107	175 – 7"	14	12•
J65-108	200 – 8"	16	12•
Second			
J65-204	100 – 4"	6	12•
J65-245	112 – 4-1/2"	7	12•
J65-205	125 – 5"	7	12•
J65-206	150 – 6"	9	12•

J65-H Series Taper Saw Files (Softgrip Handle)



Same specs as J65 series, with
dual-component ergonomic handle



CODE NO	mm "	mm	
Bastard			
J65-106H	150 – 6"	12	6
J65-107H	175 – 7"	14	6
J65-108H	200 – 8"	16	6

J65D-207 Double Ended Saw File



Single cut surfaces



CODE NO	mm "	mm	
Second			
J65D-207	175 – 7"	6	12•

J66 Series Round Chainsaw Files



Single cut surfaces



CODE NO		mm	mm	mm "	
Second					
J66-640	5/32	4	150 – 6"	12•	
J66-848	3/16	4.8	200 – 8"	12•	
J66-855	7/32	5.5	200 – 8"	12•	


10 Cutting Tools and Files


J67 Series

Cabinet Rasps



Rasp-cut surfaces



CODE NO	mm "	mm	
Bastard			
J67-108	200 – 8"	20	12 •
J67-110	250 – 10"	25	12 •


J67-H Series

Cabinet Rasps (Softgrip Handle)



Same specs as J67 series, with dual-component ergonomic handle



CODE NO	mm "	mm	
Bastard			
J67-108H	200 – 8"	20	6
J67-110H	250 – 10"	25	6


J68 Series

Half Round Rasps



Rasp-cut surfaces, tapered to the tip



CODE NO	mm "	mm	
Bastard			
J68-108	200 – 8"	20	12 •
J68-110	250 – 10"	24	12 •
J68-112	300 – 12"	29	6 •


J68-H Series

Half Round Rasps (Softgrip Handle)



Same specs as J68 series, with dual-component ergonomic handle



CODE NO	mm "	mm	
Bastard			
J68-108H	200 – 8"	20	6
J68-110H	250 – 10"	24	6
J68-112H	300 – 12"	29	6


J70 Series

Round Rasps



Rasp-cut surfaces, tapered to the tip



CODE NO	mm "	mm	
Bastard			
J70-108	200 – 8"	8	12 •
J70-110	250 – 10"	10	12 •
J70-112	300 – 12"	12	6 •


J70-H Series

Round Rasps (Softgrip Handle)



Same specs as J70 series, with dual-component ergonomic handle




CODE NO	mm "	mm	
Bastard			
J70-108H	200 – 8"	8	6
J70-110H	250 – 10"	10	6
J70-112H	300 – 12"	12	6

J71 Series

Softgrip File Handles








Two-component ergonomic handle with hanger hole for use with rasps, standard and saw files

CODE NO	mm	
J71-03	95	12 •
J71-04	95	12 •
J71-05	103	12 •
J71-06	103	12 •

WHICH HANDLE FOR WHICH FILE ?

6" 7" 8" 10" 12"

Engineer's Files

Icon	File Type	6"	7"	8"	10"	12"
	J55 Flat Files, J55F Tapered Flat Files	J71-03	–	J71-05	J71-05	J71-05
	J56 Half-Round File	J71-03	–	J71-05	J71-05	J71-05
	J57 Round File	J71-04	–	J71-04	J71-06	J71-06
	J58 Square File	J71-04	–	J71-04	J71-06	J71-06
	J59 Three Square File	J71-04	–	J71-04	J71-06	J71-06

Saw Files

	J64 Milled File	J71-03	–	J71-05	J71-05	J71-05
	J65 Taper Saw File	J71-05	J71-06	J71-06	–	–

Rasps

	J67 Cabinet Rasp	–	–	J71-05	J71-05	–
	J68 Half-Round Rasp	–	–	J71-05	J71-05	J71-05
	J70 Half-Round Rasp	–	–	J71-04	J71-06	J71-06

J75-H26
Flat Needle File



CODE NO			
J75-H26	160 – 6"	7.5	12 •

J75-F26
Tapered Flat Needle File



CODE NO			
J75-F26	160 – 6"	7.5	12 •

J75-HR26
Half Round Needle File



CODE NO			
J75-HR26	160 – 6"	6.9	12 •

J75-R26
Round Needle File



CODE NO			
J75-R26	160 – 6"	4	12 •

J75-R06
6 Piece Needle File Set



CODE NO	
J75-R06	10

6 PC: J75-F26, J75-H26, J75-HR26, J75-R26, J75-S26, J75-TS26

J75-S26
Square Needle File



CODE NO			
J75-S26	160 – 6"	3.5	12 •

J75-TS26
Three Square Needle File



CODE NO			
J75-TS26	160 – 6"	5	12 •

J75-K26
Knife Needle File



CODE NO			
J75-K26	160 – 6"	7.2	12 •

J75-B26
Barrette Needle File



CODE NO			
J75-B26	160 – 6"	7	12 •

J75-R12
12 Piece Needle File Set



CODE NO	
J75-R12	10

12 PC: J75-F26x2, J75-H26x2, J75-HR26, J75-R26, J75-S26, J75-TS26, J75-K26, J75-B26, J75-C26, J75-O26

J75-C26
Crossing Needle File



CODE NO			
J75-C26	160 – 6"	6.6	12 •

J75-O26
Oval Needle File



CODE NO			
J75-O26	160 – 6"	4.6	12 •

J75M-R05
Contact File



Used for filing electrical contacts
The code represents a 5 piece package



CODE NO			
J75M-R05	160 – 6"	8.0	1

J76-R06
6 Piece Diamond Needle File Set



CODE NO	
J76-R06	10

11 Hammers and Chisels

160 | 162




L01 Series

Machinist's Hammers (Wooden Handle)


DIN 1041, ISO 15601, TS 5-1



CODE NO	gr	mm	
L01-100	100	265	6
L01-200	200	280	6
L01-300	300	300	6
L01-500	500	320	6
L01-1000	1000	360	6
L01-1500	1500	380	4
L01-2000	2000	400	4

Spare Handles (for L01 Series)




CODE NO	gr	mm	
L01-H300	300	300	12
L01-H500	500	320	12
L01-H1000	1000	360	12

L01F Series

Machinist's Hammers (3 Component Handle)

new




CODE NO	gr	mm	
L01F-300	300	300	6
L01F-500	500	320	6
L01F-1000	1000	360	6

L02 Series

Ball Pein Hammers (Wooden Handle)

ISO 15601, TS 5-1



CODE NO	oz	gr	mm	
L02-08	8	227	300	6
L02-12	12	340	325	6
L02-16	16	450	350	6
L02-24	24	700	375	6
L02-32	32	910	400	6

L02F-12

Ball Pein Hammers (Fiberglass Handle)

ISO 15601, TS 5-1




CODE NO	oz	gr	mm	
L02F-12	12	340	315	6

L12DB Series

Dead Blow Hammers




CODE NO	mm	gr	mm	
L12DB-35	35	450	290	10
L12DB-45	45	675	305	10
L12DB-50	50	900	325	8

L12-2 Series

Soft Face Hammers


new



CODE NO	mm	mm	
L12-30-2	30	280	6
L12-40-2	40	300	6
L12-50-2	50	340	6




Spare Plastic Heads (for L12-2 Series) - Single

CODE NO	mm	
L12-R30-2	30	6•
L12-R40-2	40	6•
L12-R50-2	50	6•

L12C-35

Combi Hammer (Steel and Plastic Faces)



CODE NO	mm	mm	
L12C-35	35	295	6



Spare Plastic Heads (for L12C-35) - Single

CODE NO	mm	
L12C-35R	35	6•

L16 Series

Rubber Mallets

DIN 5128, TS 5-2



CODE NO	∅ mm	mm	
L16-30	50	310	6
L16-40	55	335	6
L16-50	60	335	6

L17-40

Aluminium Hammer



CODE NO	∅ mm	mm	
L17-40	40	300	6

L18 Series

Copper Hammers



CODE NO	gr	mm	
L18-750	750	320	6
L18-1000	1000	350	6
L18-1500	1500	360	6

L18F Series

Copper Hammers (3 Component Alu Core Handle)



CODE NO	gr	mm	
L18F-750	750	320	6
L18F-1000	1000	350	6
L18F-1500	1500	360	6

L25-2 Series

Flat Chisels

DIN 6453, TS 492-1



CODE NO	mm	mm	
L25-150-2	150	18	12
L25-200-2	200	24	12
L25-250-2	250	28	6
L25-300-2	300	30	6

L25-G-2 Series

Flat Chisel (with Plastic Guard)

DIN 6453, TS 492-1



CODE NO	mm	mm	
L25-250G-2	250	28	6
L25-300G-2	300	30	6

L27 Series

Cold Flat Chisels

DIN 6453, TS 492-1



CODE NO	mm	mm	
L27-125	125	12	12
L27-150	150	16	12
L27-175	175	20	12

L28 Series

Cross Cut Chisels

DIN 6453, TS 492-2



CODE NO	mm	mm	
L28-125	125	5	12
L28-150	150	7	12

L29 Series

Centre Punches

DIN 7252, TS 2338-3



CODE NO	∅ mm	mm	
L29-3	3	100	12
L29-4	4	120	12
L29-5	5	150	12

L29AT

Automatic Center Punch

DIN 7252, TS 2338-2



CODE NO	∅ mm	mm	
L29AT	3	150	20
L29ATR	Spare Tip (for L29AT)		25

L30 Series

Taper Pin Punches

DIN 6458, TS 2338-2



CODE NO	∅ mm	mm	
L30-2	2	120	12
L30-3	3	120	12
L30-4	4	120	12
L30-5	5	120	12
L30-6	6	120	12

L31 Series

Parallel Pin Punches

DIN 6450, TS 2338-1



CODE NO	∅ mm	mm	
L31-2	2	150	12
L31-3	3	150	12
L31-4	4	150	12
L31-5	5	150	12
L31-6	6	150	12
L31-8	8	150	12
L31-10	10	150	12

L35-61

6 Piece Chisel and Punch Set



CODE NO	
L35-61	10

L27 125, 150 mm, L28 125 mm, L29 4 mm, L30 3 mm, L31 4 mm

L35-62

6 Piece Parallel Pin Punch Set




CODE NO	
L35-62	10


L31 2, 3, 4, 5, 6, 8 mm

11 Hammers and Chisels

L35A-51

5 Piece Chisel and Punch Set (ANSI Spec.)




CODE NO	
L35A-51	1
L27A 5/8 x 6-3/4 inch	
L29A 1/8 x 4-7/8 inch	
L30A 1/8 x 5-1/8 inch	
L31A 2 PC: 1/8 x 5-3/16, 3/16 x 5-7/8 inch	

L35A-11

11 Piece Chisel and Punch Set (ANSI Spec.)





CODE NO	
L35A-11	1
L27A 3 PC: 3/8 x 5-1/2, 1/2 x 6, 5/8 x 6-3/4 inch	
L29A 3/16 x 6 inch L30A 3 PC: 3/32 x 5-1/4, 5/32 x 6, 3/16 x 6-1/4 inch	
L31A 3 PC: 3/32 x 4-7/32, 5/32 x 5, 3/16 x 5-7/8 inch	
Chisel gauge 2-5/8 inch	

L20-04SW

Metal Skin Wedge Tool (Curved)





CODE NO		
L20-04SW	180	6

L20-0401

Pry Bar (with pointed and flat bent heads)





CODE NO		
L20-0401	400	6

L20-0403

Pry Bar (with pointed and leverage ends)







CODE NO		
L20-0403	400	6

L40P Series

Hollow Punches (Used with L40G)





CODE NO				
L40P-03	3	1/8	25	6
L40P-04	4	5/32	25	6
L40P-05	5	3/16	25	6
L40P-06	6	1/4	25	6
L40P-08	8	5/16	25	6
L40P-10	10	3/8	25	6
L40P-12	12	15/32	25	6
L40P-14	14	35/64	25	6
L40P-16	16	5/8	25	6
L40P-18	18	45/64	25	6
L40P-20	20	25/32	25	6
L40P-22	22	7/8	25	6
L40P-30	30	1 3/16	25	6

L40G

Handle (for L40P Series)



CODE NO		
L40G	145	6

L40-P14

14 Piece Hollow Punch Set






CODE NO	
L40-P14	1
L40P 14 PC: 3, 4, 5, 6, 8, 10, 12, 14, 16, 18, 20, 22, 30 mm + L40G	

L50-2 Series

Wood Chisels (Softgrip Handle)

DIN 5139, ISO 2729, TS 531




CODE NO			
L50-06-2	6	140	10
L50-08-2	8	140	10
L50-10-2	10	140	10
L50-12-2	12	140	10
L50-14-2	14	140	10
L50-16-2	16	140	10
L50-18-2	18	140	10
L50-20-2	20	140	10
L50-22-2	22	140	10
L50-25-2	25	140	10
L50-30-2	30	140	10

L50-B4-2

4 Piece Softgrip Handle Wood Chisel Set



CODE NO	
L50-B4-2	1
4 PC: L50-2, 6, 12, 20, 25 mm	

12 Specialist Automotive Tools

163 | 181




N11-02A Compression Tester Kit (for Petrol Engines)



CASE WxHxD (mm)
235 x 145 x 50

For testing the compression of petrol engines, kit contains 150 mm coupling adaptor and 350 mm flexible adaptor (14/18 mm threaded)


CODE NO	CAPACITY psi / kPa	
N11-02A	0-300 / 0-2000	1
N11-02A/4		1

N11-02A-2 Compression Tester Kit (for Petrol and LPG Engines)




CASE WxHxD (mm)
280 x 220 x 60

For testing the compression of gasoline and LPG vehicles, 2 x 130 mm adaptors (1 curved, 1 straight), 1 x 300 mm extension and 4 adapters (10, 12, 14, 18 mm)


CODE NO	CAPACITY psi / kPa	
N11-02A-2	0-300 / 0-2000	1

N11-02B-2 Compression Tester Kit (for Diesel Engines)

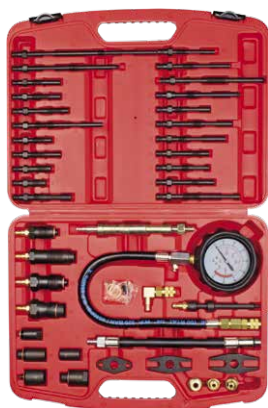

CASE WxHxD (mm)
390 x 300 x 80

Kit for testing the compression of diesel engines, comprehensive range of dummy glow plugs and injectors


CODE NO	CAPACITY bar/psi	
N11-02B-2	70/1000	1

N11-03 Vacuum and Pressure Test / Bleed Kit



CASE WxHxD (mm)
390 x 300 x 80

Helps identify a variety of faults including fuel, ignition, transmission, emission and air conditioning/heating, also suitable for bleeding brake and clutch systems

CODE NO	CAPACITY bar	
N11-03	(-1) - 4	1

N11-04 Oil Pressure Test Kit



CASE WxHxD (mm)
510 x 230 x 70

Used for checking fuel pump pressure and low oil warning systems, includes adaptors with coupling and 1.3 m long hose

CODE NO	CAPACITY bar/psi	
N11-04	0-10 bar / 0-150 psi	1


CETA FORM
QUALITY

12 Specialist Automotive Tools

N11-05 Diesel Injector Flow Test Kit (Common Rail)



CASE WxHxD (mm)
390 x 300 x 75

Measures return fuel flow on diesel vehicles up to 6 cylinders (Common Rail), identifies faulty injectors easily, tubes for quick tests and bottles for longer, more accurate tests

Now includes adapters also for Bosch, Delphi and Denso systems

CODE NO		
N11-05		1

N11-06 Fuel Injection Pressure Test Kit (Petrol Engines)



CASE WxHxD (mm)
450 x 340 x 90

Used to measure the fuel system pressure in gasoline vehicles, includes all necessary adapters, hoses and fittings, pressure valve with long drain hose, ensures safe discharge of fuel

CODE NO	CAPACITY bar/psi	
N11-06	0-10 bar / 0-140 psi	1

N11-20 Mechanic's Stethoscope



Used to identify the source of engine noise (i.e.: damaged valves, blown gaskets etc.), plastic ear pieces, supplied with 210 mm extension probe (fixed probe: 80 mm)

CODE NO		
N11-20		1

N12-01 Cooling System Pressure Test Kit



CASE WxHxD (mm)
610 x 500 x 120

Complete kit for the detection of leakages in cooling systems of cars, wide model coverage

Updated content: Now covers more models

CODE NO		
N12-01		1

N12-01B Cooling System Pressure Test Kit (Universal Adaptors)



CASE WxHxD (mm)
400 x 370 x 80

Kit for the detection of leakages in cooling systems of cars, conical adaptors in the kit allow for universal coverage

CODE NO		
N12-01B		1

N12-04AB Refractometer (Suitable for AdBlue®)




CASE WxHxD (mm)
200 x 75 x 55

4 in 1 measurement tool:

- *Antifreeze
- *Battery Acid
- *Washer fluid antifreeze
- *Adblue additive

Can be used on vehicles which use ethylene glycol as coolant or sulphuric acid as battery fluid. Waterline adjustment screw, visual clarity adjustment, pipette for draining fluid.



CODE NO	mm	
N12-04AB	150	1

N12-05P Antifreeze Tester (with Reservoir)



Large and easy to read dial, Hydrostatic liquid lock, Temperature balancing twin rotor measuring unit, Intake canal preventing air bubbles

CODE NO	TEMPERATURE RANGE °C	
N12-05P	0 / -40	1

N12-05 Antifreeze Tester



Suitable for measuring ethylene glycol (Antifreeze) density inside radiator, tubular shatterproof composite body

CODE NO	mm	
N12-05	200	10

N12-10
Hose Clamp Pliers (for Spring Band Hose Clamps)



For tag-type hose clamps, rotating tips

CODE NO	mm	
N12-10	220	6

N12-10L
Long Reach Hose Clamp Pliers (for Spring Band Hose Clamps)



For tag-type hose clamps, 680 mm bowden shaft for restricted areas

CODE NO	mm	
N12-10L	230	12

N12-12
Hose Clamp Pliers (for Ear Hose Clamps)



For ear-type hose clamps (found on vacuum hoses, fuel and cooling systems), also suitable for CV joint clamps

CODE NO	mm	
N12-12	230	10

N12-12HD
CV Joint Boot Band Pliers (Heavy Duty)



For installing CV joint clamps on axle boots (Hytre) with preset torque values, used in conjunction with a torque wrench

CODE NO	mm	
N12-12HD	265	1

N12-13
Hose Clamp Pliers (for CLIC Clamps)



For CLIC and CLIC-R hose clamps

CODE NO	mm	
N12-13	180	6

N12-10HEN
HENN Clamp Removal Tool



Used to remove HENN type clamps used in sections such as coolant hoses and turbo hoses

CODE NO	mm	
N12-10HEN	100	1

N12-P16 Series
Flexible Hose Clamps



Stops flow inside flexible hoses, high quality plastic, includes locking ring

CODE NO	mm	max. mm	
N12-P1615	155	15	12
N12-P1630	185	30	12
N12-P1652*	250	52	12

*ex code N12-P1660

N12-P16KIT
3 Piece Flexible Hose Clamp Set



CODE NO	
N12-P16KIT	1

3 PC: Ø15, Ø30, Ø52 mm

N12-1625
Fluid Line Clamp



Used to stop fuel flow temporarily, knob adjustment

CODE NO	mm	
N12-1625	25	1

N12-25AT
3 Arm Adjustable Fuel Tank Sensor Wrench



Plastic fuel tank allows the sensor modules to be disassembled without damaging the part, 3-arm self-adjusting design

CODE NO	CAPACITY mm	mm	
N12-25AT	89-170	16	1

12 Specialist Automotive Tools

C17-R Series

3/8" Drive 6 Point Spark Plug Sockets (Retaining Rubber)

ISO 11168



10
3/8"

6-Point, retaining rubber

CODE NO	mm	mm	
C17-R16	16	63	12•
C17-R18	18	63	12•
C17-R21	21	65	12•
For display carded delivery = Item code + X			6

C17-R14C

3/8" Drive 12 Point Spark Plug Socket (Retaining Clip)

ISO 11168



10
3/8"

For 14 mm spark plugs, with metal clip holder

Suitable for both 6 and 12 point plugs

CODE NO	mm	mm	
C17-R14C	14	63	6•
For display carded delivery = Item code + X			6

C17-R14ML

3/8" Drive 12 Point Spark Plug Sockets (Magnetic- Extra Long)

ISO 11168



10
3/8"



For 14 mm spark plugs, retaining magnet

Suitable for both 6 and 12 point plugs

CODE NO	mm	mm	
C17-R14ML	14	250	6
For display carded delivery = Item code + X			6

C17-R14CF

3/8" Drive 12-Point Jointed Spark Plug Socket

ISO 11168



10
3/8"

For 14 mm spark plugs, with retaining magnet

Suitable for both 6 and 12 point plugs

CODE NO	mm	mm	
C17-R14CF	14	98	6
For display carded delivery = Item code + X			6

C27-R Series

1/2" Drive 6 Point Spark Plug Sockets (Retaining Rubber)

ISO 11168



12.5
1/2"

6-Point, retaining rubber

CODE NO	mm	mm	
C27-R16	16	67	12•
C27-R21	21	67	12•
For display carded delivery = Item code + X			6

C27-RM Series

1/2" Drive 6 Point Spark Plug Sockets (Magnetic)

ISO 11168



12.5
1/2"



6-Point, retaining magnet

CODE NO	mm	mm	
C27-R16M	16	67	6•
C27-R21M	21	67	6•
For display carded delivery = Item code + X			6

B32-S Series

T-Handle Swivel Spark Plug Socket Wrenches



Swiveling 6-point socket, retaining magnet, with 3/8" drive female end

CODE NO	mm	mm	
B32-16S	16	510	6
B32-21S	21	510	6

N13-PC14

Spark Plug Pliers (Curved Long Nose)



For removal of spark plug boot in deep-seated engine applications

CODE NO	MIN. mm	mm	
N13-PC14	14	290	6

N13-10P03

3 Piece 3/8" Drive Glow Plug Socket Set



10
3/8"

Set for installing / removing glow plugs, universal joint sockets, 72 mm socket depth

CODE NO	
N13-10P03	10
3 PC: 8, 10, 12 mm	

N14-01 Series

3/8" Drive Oil Filter Cap Wrenches



10
3/8" ✓

Cap type, prevents damage to the filter housing, low profile design for tight spaces, heavy gauge steel

Max. torque 115 Nm (85 lbf. ft)

N14-016514	LAND ROVER, Japanese Cars
N14-017612	FORD, PEUGEOT, RENAULT
N14-017614	BMW, MERCEDES, PORSCHE, VW, AUDI, SEAT
N14-018616	BMW, VOLVO
N14-019515	FORD: Transit van

CODE NO	∅ mm	Flutes	
N14-016514	65	14	12
N14-017612	76	12	12
N14-017614	76	14	12
N14-018616	86	16	12
N14-019515	95	15	12

N14-01S Series

3/8" Drive Oil Filter Sockets (Low Profile)



10
3/8" ✓

Low profile design for use on cartridge steel filters

N14-01532	OPEL Astra-G/Corsa-B/Zafira
N14-01536	BMW 24V, FORD DuraTorq dizel / Transit, MERCEDES 116 MB Vito Cdi, OPEL 16V

CODE NO	∅ mm	
N14-01532	32	12
N14-01536	36	6

N14-02 Series

1/2" Drive Oil Filter Cap Wrench (Aluminum)



12.5
1/2" ✓

Cap type, aluminum material for minimum risk of damage to filter housing, low profile design for tight spaces

N14-027414	AUDI, BMW, MERCEDES, VW
N14-029215	ALFA-ROMEO, AUDI, CHRYSLER, FORD, HONDA, MAN, MITSUBISHI, NISSAN, OPEL/VAUXHALL, PORCHE, RENAULT, VOLVO, VW (Especially for KNECHT and MAHLE filters)

CODE NO	∅ mm	Flutes	
N14-027414	74	14	12
N14-029215	92	15	12

N14-01K09

9 Piece Oil Filter Cap Wrench Set (Euro Vehicles)



CASE 6xVxD (mm)
330 X 260 X 70

Suitable for most Euro vehicles on the market, 3/8" drive content, supplied with 3/8" M-1/2" F adaptor

CODE NO	
N14-01K09	1



N14-01
∅ mm 66 (6 Flutes), 76 (12 Flutes), 76 (14 Flutes), 86 (16 Flutes)



N14-01S
∅ mm 32 (6 Flutes), 36 (6 Flutes)



N14-02
∅ mm 74 (14 Flutes), 92 (15 Flutes)



C21-915 D1/2" - E3/8"

N14-03 Series

Oil Filter Wrenches (with Double Chain)



Very high clamping power, swivel head, duplex chain for security

CODE NO	∅ mm	mm	
N14-031	60-110	230	1
N14-032	60-160	230	1
N14-033	60-195	230	1

N14-03SQ Series

Oil Filter Wrenches (with Thin Double Chain)



12.5
1/2" ✓

For operation in restricted areas, very high clamping power, duplex chain for security

CODE NO	∅ mm	
N14-031SQ	60-110	1
N14-032SQ	70-170	1

N14-04S Series

Metal Band Oil Filter Wrenches (Rotating Head)



Ease of working in tight spaces thanks to the swivel joint, textured areas on the metal band surface that prevent the filter from slipping

CODE NO	∅ mm	mm	
N14-04S1	70-82.5	200	6
N14-04S3	95-110	200	6

N14-04 Serisi

Adjustable Oil Filter Wrenches

new



Adjustable metal band, plastic handle

CODE NO	∅ mm	mm	
N14-041	60-80	190	1
N14-042	80-110	190	1

N14-05 Series

Oil Filter Strap Wrenches



Reinforced rubberised strap

CODE NO	∅ max. mm	mm	
N14-051	160	225	6
N14-052	200	225	6

N14-05R Series

Spare Straps (for N14-05 Series)



CODE NO		
N14-051R	N14-051	1
N14-052R	N14-052	1

12 Specialist Automotive Tools

N14-061S

Oil Filter Band Wrench (Ergo Grip)



High strength non slip metal strap, durable ergonomic handle

CODE NO	mm	mm	
N14-061S	60-100	155	6



Spare Strap (for N14-06 Series)

N14-06R	N14-061S, N14-06	10
---------	------------------	----

N14-081

Adjustable Oil Filter Pliers



Slip joint design quickly adjusts to most filter sizes

CODE NO	mm	mm	
N14-081	60-100	300	6

N14-071

3/8" Drive 3 Arm Oil Filter Claw Wrench



10 3/8"

Self-adjusting mechanism: higher applied torque for tighter claw grip, 3/8" drive, supplied with 3/8" M-1/2" F adaptor

CODE NO	mm	
N14-071	65-120	1

N14-072

1/2" Drive 3 Arm Oil Filter Claw Wrench (Commercial Vehicles)



12.5 1/2"

For commercial vehicles, also used on air dryer cartridges, self-adjusting mechanism: higher applied torque for tighter claw grip, 1/2" drive

CODE NO	mm	
N14-072	95-165	1

N14-07DSG1

1/2" Dr. Oil Filter Wrench for DSG Gear Oil Change (Short)



12.5 1/2"

All features are the same as N14-07DSG2, but the product is manufactured in short type for common rail engines

CODE NO	mm	mm	
N14-07DSG1	24	100	1

N14-07DSG2

1/2" Dr. Oil Filter Wrench for DSG Gear Oil Change (Long)



12.5 1/2"

For VW group vehicles, used for covers during oil filter change in DSG gearboxes, batteries etc. requires no dismantling and saves about half an hour of time

CODE NO	mm	mm	
N14-07DSG2	24	140	1

N14-10

Oil Drain Plug Wrench



For removal and installation of female oil drain plugs

CODE NO	mm	mm	
N14-10	8x10	285	6

N14-12S Series

3/8" Drive Square Oil Drain Plug Sockets



10 3/8"

For removal and installation of female oil drain plugs

CODE NO	mm	mm	
N14-12S08	8	36	1
N14-12S10	10	36	1
N14-12S12	12	36	1

N14-12X16

3/8" Drive XZN Tamper Proof Socket Bit- Short



10 3/8"

3/8" Drive XZN Tamper Proof Oil Drain Plug Socket

CODE NO	mm	
N14-12X16	M16	36

N14-12F10

3/8" Drive Female Square Drain Plug Key



10 3/8"

For use in engine, gearbox and differentials

CODE NO	mm	mm	
N14-12F10	10	36	1

N14-12VAG.B

1/4" Oil Drain Plug Bit - for VAG Plastic Plugs



Used in the assembly and removal of plastic oil drain plugs on VAG group cars

CODE NO	mm	
N14-12VAG.B	35 mm	1

N14-12P14

14 Piece 3/8" Drive Oil Drain Plug Socket Set



10 3/8"

CODE NO	
N14-12P14	1

<ul style="list-style-type: none"> ○ N14-12S 8, 10, 12 mm ○ N14-12H 8, 10, 12, 14, 17 mm ● N14-12F10 10 mm 	<ul style="list-style-type: none"> ⊙ N14-12X16 M16 ⊙ N14-12T45 T45 ⊙ N14-12TR9
N14-12VAG.B	C11-37 3/8"x250 mm

N14-12R09

9 Piece 3/8" Drive Oil Drain Plug Socket Set



10
3/8"

CODE NO

N14-12R09



1



○ N14-12S 8, 10, 12 mm



C11-40 3/8"x200 mm



○ N14-12H 8, 10, 12, 14, 17 mm

N15-T3UNI

6 Piece Belt Tension Locking Pin Set



For locking the camshaft sprockets when changing the timing belt

CODE NO

N15-T3UNI



1

6 PC: 0.79mm / .0310", 1.24mm / .0490",
1.37mm / .0540", 1.49mm / .0585", 1.68mm
/ .0660", 1.92mm / .0760"

N15-K2VAG.12

Timing Tool Kit (VAG 1.2 TSI)



N15-K2VAG.U/5



N15-K2VAG.U/4



Applications:

Audi: A1, A3 / **Seat:** Altea, Ibiza, Leon, Toledo / **Skoda:** Fabia II, Octavia II, Praktik, Rapid, Roomster, Yeti / **VW:** Beetle, Caddy, Golf Plus, Golf VI, Jetta, Polo, Touran

Engine Codes: CBZA, CBZB, CBZC

CODE NO

N15-K2VAG.12



1

N15-K3VAG

Timing Tool Kit

(VW/Seat/Skoda 1.2 6/12V)



Applications:

Seat: Cordoba, Ibiza / **Skoda:** Fabia, Fabia II, Roomster / **VW:** Fox, Polo

Engine Codes:

AWY, AZQ, BBM, BMD, BME, BXV, BZG, CEVA, CGPA, CGPB, CHFA, CHFB, CJA

CODE NO

N15-K3VAG



1

N15-T1BMW

Injection Pump Puller (BMW 1.8, 2.0, 3.0D)



For the safe removal of the fuel pump when removing the pump sprocket, and to retain the position of the pump sprocket in-sit, whilst the pump is being removed from the engine

Applications:

BMW 318d, 320d (E46) 1988-2005 arası / 318td, 320td, 525d, 530d, 530, 535 (E60-61) 2000-2006 in vehicles between M47, M47T2, M47TU, M57, M57TU for coded engines

CODE NO

N15-T1BMW



1

N15-K1BMW

Timing Tool Kit (BMW 2.0, 3.0D N47/N57)



Applications:

116d, 118d, 120d, 123d, 316d, 318d, 320d, 325d, 330d/xd, 520d, 525d, 530d, 530d GT, 535d, 535d GT, 730d/Ld, 740d, 740d xDrive, X1 sDrive 1.8d/2.0d, X1 xDrive 1.8d/2.0d/2.3d, X3 2.0d, X3 xDrive 1.8d/3.0d, X5 3.0d, X5 xDrive 4.0d, X6 xDrive 3.0d/4.0d

Engine Codes:

D20A, D20B, D20U0, D2000, D20T0, D30U0, D3000, D3001, D30T0

CODE NO

N15-K1BMW



1

N15-K2BMW

Timing Tool Kit (BMW/Mini 1.4, 1.6N13)



Kit also suitable for Citroen and Peugeot models, please refer to the detailed application and engine codes list

Applications:

BMW, Mini

Engine Codes:

N13, N16, N18,

CODE NO

N15-K2BMW



1

N15-K2REN

Timing Tool Kit (RENAULT 1.4, 1.6, 1.8, 2.0 16V)



Applications:

Renault: Avantime, Clio II, Clio III/Sport, Espace/Grand Espace, Kangoo/Trekka, Kangoo II/Be Bop, Laguna, Laguna II, Laguna III, Logan/MCV, Megane, Megane II, Megane III/Sport, Megane/Scenic, Modus/Grand Modus, Scenic/RX4, Scenic/Grand Scenic II, Trafic II, Twingo II/Sport / **Nissan:** Kubistar, Primastar / **Vauxhall/Opel:** Vivaro

Engine Codes:

K4J: 730, 732, 740

K4M: 708, 730, 732, 752, 753, 760, 761, 764, 812, 813

F4P: 720, 722, 760, 770, 771, 772, 773, 774, 775

F4R: 700, 701, 712, 713, 714, 715, 720, 722, 730, 732, 740, 741, 744,

746, 762, 763, 764, 765, 766, 767, 770, 771, 774, 776, 780, 784, 786,

787, 790, 791, 792, 794, 795, 796, 797, 800, 802, 810, 811, 820, 830,

832, 867, 870, 874, 886, 887, 896, 897

CODE NO

N15-K2REN



1

12 Specialist Automotive Tools

N15-T1REN

Camshaft Sprocket Holding Tool
(RENAULT 1.4, 1.6 16V)



For camshaft sprocket holding during timing belt change, an ideal addition to kit N15-K2REN

Applications:

1.4, 1.6 16V petrol engines

Engine Codes:

K4J: 730, 732, 740

K4M: 708, 730, 732, 752, 753, 760, 761, 764, 812, 813

CODE NO

N15-T1REN



1

N15-M1REN

Master Timing Tool Kit (RENAULT)



CASE WxHxD (mm)
370 x 300 x 80

Complete kit for timing belt/chain change almost for all RENAULT group diesel and petrol engines

Applications:

1.2, 1.4, 1.6, 1.8, 2.0 16V, 2.5 20V petrol engines

1.9 D/TD/dTi, 2.2 D/TD, 2.5D, 2.8 dTi diesel engines

1.5 dCi, 1.9 dCi, 2.2 dCi, 2.5 dCi diesel engines

CODE NO


N15-M1REN



1

N15-M1FRD

Complete Master Timing Tool Kit (FORD)

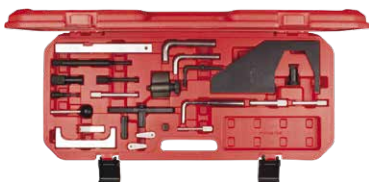

CASE WxHxD (mm)
600 x 270 x 60

Complete kit for timing belt/chain change almost for all FORD group diesel and petrol engines

Applications:

1.25, 1.4, 1.6, 1.6 Ti-VCT, 1.8, 2.0 petrol engines

1.4/1.6 TDCi, 1.8 D/TD/TDCi/TDDi, 2.0 TDCi diesel engines

CODE NO

N15-M1FRD



1

N16-07

Valve Stem Seal Pliers



For removal and installation of valve stem seals on 16V and 24V OHC engines, long stem, serrated tips

CODE NO

N16-07

mm

280



6

N16-10 Series

Piston Ring Compressors



To hold piston rings in position while inserting the pistons into cylinders, spring steel wrap, ratchet action tensioning, supplied with key

CODE NO

N16-1001

mm

53-125

mm

75



1

N16-1002

53-175

75

1

N16-1003

60-125

100

1

N16-1004

60-175

100

1

N16-1005

60-175

150

1

N16-11 Series

Piston Ring Expanders



For assembling and dismantling piston rings

CODE NO

N16-1110

mm

50-100

mm

215



1

N16-1116

110-160

260

1

N17-052208

1/2" Drive Diesel Injector Socket - 22 mm



12.5
1/2"

For removal and installation of diesel injectors

Applications:

Nissan, VW

CODE NO

N17-052208

mm

22

mm

78



10

N17-052211

1/2" Drive Diesel Injector Socket - 22 mm



12.5
1/2"

For removal and installation of diesel injectors

Applications:

Audi, BMW, Mercedes, Rover, Seat, Vauxhall/Opel, Volvo, VW

CODE NO

N17-052211

mm

22

mm

110



10

N17-052708

1/2" Drive Diesel Injector Socket - 27 mm



12.5
1/2"

For removal and installation of diesel injectors

Applications:

BMW, Fiat, Ford, Peugeot

CODE NO

N17-052708

mm

27

mm

80



10

N18-1522SL

1/2" Drive Offset Oxygen Sensor Socket - 22 mm



12.5
1/2"

Used for removal and installation of heated and unheated oxygen sensors, angled design allows access to the sensor from the side instead of the top and prevents cable damage.

CODE NO

N18-1522SL

mm

22



1

N17-05L14
1/2" Drive 12-Point Injection Line Socket - 14 mm



12.5
1/2"

Used for bolted connections in injector lines

Applications:

Fiat, Citroen, Peugeot, Renault, Iveco (Common Rail motorlar)
BMW, Mercedes-Benz, VW (bolted injector line connections)

CODE NO	mm	mm	
N17-05L14	14	119	1

N17-05L17
1/2" Drive 12-Point Injection Line Socket - 17 mm



12.5
1/2"

Used for bolted connections on injection lines

Applications:

Mercedes-Benz 100, 130, 314, 360, 360h, 352A, 346/355, 401, 402, 403, 407h, 615, 616, 617

CODE NO	mm	mm	
N17-05L17	17	119	1

N17-05L19
1/2" Drive 12-Point Injection Line Socket - 19 mm



12.5
1/2"

Used for bolted connections in injector lines

Applications:

Mercedes-Benz 352 A, 346/355 A, 401, 402/422 LA, 403, 407h

CODE NO	mm	mm	
N17-05L19	19	119	1

N18-1522S
3/8" Drive Oxygen (Lambda) Sensor Socket



10
3/8"

Suitable for heated and unheated oxygen sensors, cut-out wiring section

CODE NO	mm	mm	
N18-1522S	22	90	10

N18-CC
Chain Type Exhaust Cutter



Suitable for steel, copper and PVC pipes up to 2.6 mm, Especially recommended for cutting exhaust pipes, 13 blade cutter chain, Epoxy coated, High strength sheet steel handle

CODE NO	mm	mm	
N18-CC	15-75	250	1



N18-CCR	for N18-CC	1
---------	------------	---

N21-0101
Brake Fluid Tester (8-in-1)

new



Color-coded diode lamps are used in all vehicles, including cars, trucks, and motorcycles, to measure brake fluid quality. Requires 1 x 1.5V AAA battery (included).



Applications:

1: DOT 3, 2: DOT 4, 3: DOT 5.1, 4: ACD elco DOT 3, 5: PENNZOIL DOT 3, 6: Prestone DOT 3, 7: Motorcraft DOT 3, 8: TOYOTA DOT 3

CODE NO	mm	
N21-0101	155	10

N21-0102
Brake Fluid Tester



For testing hydraulic brake fluid quality, suitable for DOT4 brake fluids, colour coded bulb indicators, suitable for cars, trucks and motorbikes, 1 piece 1.5V AAA battery (included)

Applications: DOT 4

CODE NO	mm	
N21-0102	150	25

N21-0302
Brake Fluid Bleeder Set (Pneumatic)



For the extraction of brake fluid on wheel brake cylinders / brake calipers, pneumatic, suitable for ABS brakes, supplied complete with two refill containers

CODE NO	CAPACITY litre	
N21-0302	0.75-1	1

N21-04P12
12 Piece Brake Caliper Wind-Back Tool Kit



Used to mount pistons into brake calipers during the assembly of new brake pads, suitable for push-back and wind-back brakes

CODE NO	
N21-04P12	1

N21-04P21
21 Piece Brake Caliper Wind-Back Tool Kit



Used to mount pistons into brake calipers during the assembly of new brake pads, suitable for push-back and wind-back brakes

CODE NO	
N21-04P21	1

12 Specialist Automotive Tools

N21-05 Disc Brake Piston Spreader Tool



Used to retract the piston during the assembly of new brake pads

CODE NO	CAPACITY mm	
N21-05	0-70	1

N21-20BC Caliper Gauge for Brake Discs



For accurate measurement of brake disc thickness, 0.1 mm graduated metric scale, floating jaw, supplied in plastic case

CODE NO	CAPACITY max.mm	
N21-20BC	60	1

N21-20BCW Caliper Gauge for Brake Discs / Thickness Gauge



Ideal for measuring brake disc thickness without the need for tire removal, for customer supervised measurement

CODE NO	CAPACITY max.mm	
N21-20BCW	45	1

N21-30DST Draw Spring Assembly Tool



Used in the assembly and disassembly of the pull wire of the parking brake linings (rear disc)

CODE NO		
N21-30DST	155	6

N21-10 Brake Caliper Brush



For brake caliper cleaning, suitable for disc brakes, one row steel wire

CODE NO		
N21-10	220	1

C64W-H Series 1/2" Drive Impact Wheel Nut Sockets (Plastic Sleeved)



CODE NO			COLOR	
C64W-H17	17	86.5	Blue	6
C64W-H19	19	86.5	Yellow	6
C64W-H21	21	86.5	Red	6
C64W-H22	22	86.5	Green	6

C64W-P03 3 Piece 1/2" Drive Impact Wheel Nut Socket Set



CASE Width (mm)
147 x 104 x 40

CODE NO	
C64W-P03	1

3 PC: 17, 19, 21 mm

C64-H17MB 1/2" Drive Convex Wheel Nut Socket (Mercedes S-Class)



For use on wheel nuts on Mercedes S-Class series

CODE NO			
C64-H17MB	17	78	6

C64F Series 1/2" Drive Impact Flip Sockets



Ideal for wheel service, two sizes in one socket, requires 75 mm extension for use

CODE NO			
C64F-1719	17 x 19	76.5	6
C64F-1819	18.5 x 19.5	76.5	6
C64F-2122	21 x 22	76.5	6

C64F-KIT1 3 Piece 1/2" Drive Impact Flip Socket Set



Get 4 common sizes needed in automotive service in only 2 sockets

CODE NO	
C64F-KIT1	1


3 PC: C64F (17x19, 21x22 mm), C61-72 (75 mm)

N23-03K1AU

20 Piece Wheel Lock Lug Nut Socket Set (AUDI)



For clover leaf security lug nuts, use with 17 mm wheel nut sockets


CODE NO	
N23-03K1AU	1
20 PC No: 801, 802, 803, 504, 805, 806, 807, 808, 809, 810, 811, 812, 813, 814, 815, 816, 817, 818, 819, 820	

N23-03K2BMW

20 Piece Wheel Lock Lug Nut Socket Set (BMW)



For clover leaf security lug nuts, use with 17 mm wheel nut sockets

CODE NO	
N23-03K2BMW	1
20 PC B11/15 ribs, B12/14 ribs, B13/16 ribs, B14/12 ribs, B15/11 ribs, B16/10 ribs, B17/7 ribs, B18/13 ribs, B19/8 ribs, B20/9 ribs, B30/13 point, BB31/15 point, BB32/16 point, BB33/17 point, BB34/18 point, BB35/19 point, BB36/20 point, BB37/21 point, BB38/22 point, BB40/23 point	




N23-011

4-Way Wheel Nut Wrench

DIN 3119, ISO 6788



Special tool steel, hardened and tempered, zinc finish


CODE NO			
N23-011	17, 19, 21, 22	420	1

N23-03K1BMW

20 Piece Wheel Lock Lug Nut Socket Set (BMW)



For clover leaf security lug nuts, use with 17 mm wheel nut sockets


CODE NO	
N23-03K1BMW	1
20 PC No: 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54, 55, 56, 57, 58, 59, 60	

N23-03K2VW

22 Piece Wheel Lock Lug Nut Socket Set (VW)



For clover leaf security lug nuts, use with 17 mm wheel nut sockets

CODE NO	
N23-03K2VW	1
22 PC No: 51/6pt, 52/7pt, 53/8pt, 54/9pt, 55/10pt, 56/11pt, 57/12pt, 58/13pt, 59/14pt, 60/15pt, 61/16pt, 62/17pt, ABC0/10pt, ABC1/11pt, ABC2/13pt, ABC3/14pt, ABC4/14pt, ABC5/16pt, ABC6/17pt, ABC7/19pt, ABC8/20pt, ABC9/21pt	





N23S Series

Offset Wheel Nut Wrenches (Driver End)

new



High-alloy steel, nickel-plated surface


CODE NO				
N23S-17	17	11/16	285	1
N23S-19	19	3/4	285	1
N23S-21	21	13/16	320	1

N23-03K1VW

20 Piece Wheel Lock Lug Nut Socket Set (VW)



For clover leaf security lug nuts, use with 17 mm wheel nut sockets

CODE NO	
N23-03K1VW	1
20 PC No: 521, 522, 523, 524, 525, 526, 527, 528, 529, 530, 531, 532, 533, 534, 535, 536, 537, 538, 539, 540	

12 Specialist Automotive Tools

N23-02 Series

Wheel Nut Wrenches for Trucks (Double Ended)

new



For commercial vehicles, high-alloy steel, nickel-plated surface

CODE NO	mm	mm	
N23-022427	24 x 27	400	1
N23-022730	27 x 30	400	1
N23-023032	30 x 32	400	1

N23-032038

Wheel Nut Wrenches for Trucks (Single Ended)

new



For commercial vehicles, high-alloy steel, nickel-plated surface

CODE NO	mm	mm	
N23-032038	20 x 38	400	1

N23-0200

Tommy Bar for Wheel Nut Wrenches (for N23-02 Series and N23-032038)

DIN 900, TS ISO 3793

new



For use in heavy-duty lug wrenches, special tool steel, nickel-plated surface

CODE NO	mm	mm	
N23-0200	18	630	1

N23-0750

Tyre Lever

new



CODE NO	mm	
N23-0750	500 - 20"	6

N23-0810A

Tyre Inflator (Dial Pressure Display) - Expert

new



Rubber-coated aluminum housing, single clip connector, 50 cm hose, 360° rotatable hose connection, 1/4" air inlet, IP44 protection class, compliant with UNI EN12645:2014 standard.

CODE NO	psi - bar	
N23-0810A	180 - 12	1

N23-0811A

Tyre Inflator (Dial Pressure Display) - Pro

new



Ergonomic composite housing, single clip connector, 70 cm hose, 360° rotatable hose connection, 1/4" air inlet, compliant with UNI EN12645:2014 standard.

CODE NO	psi - bar	
N23-0811A	170 - 12	1

N23-0811L

Tyre Inflator (Digital Display) - Pro

new



The digital display suitable for nighttime use thanks to its backlit screen, features a 360° rotating hose connection, displays Psi, Bar, and Kpa readings, comes with a 1/4" x 70 cm hose, and operates on 2 x 1.5V AAA batteries

CODE NO	psi - bar - Kpa	
N23-0811L	255 - 18 - 1800	1

N23-08MC

Michelin Tyre Inflator



Official Michelin licensed product, composite body, single clip-on connector, 1.5 m hose, 1/4" air inlet, suitable for nitrogen, accuracy to UNI EN 12645:2014

CODE NO	psi - bar	
N23-08MC	145 - 10	1

N23-0811D

Tyre Inflator (Digital Pressure Display)



High resolution backlit digital display, accuracy guaranteed to minimum -20 °, Psi, bar, Kpa and Kg/cm 2 reading, 60 cm hose, 1/4" air inlet, battery: 2x 1.5V AAA batteries

CODE NO	psi - bar	
N23-0811D	255 - 18	1

N23-0812G

Tyre Inflator (Dial Pressure Display)



Die cast body, Psi and bar reading, 30 cm hose, 1/4" air inlet

CODE NO	psi - bar	
N23-0812G	230 - 16	1

N23-0825

Tyre Inflator Chuck



Zamak head, steel body (chrome finish), 1/4" air inlet, rubber handle

CODE NO	∅	mm	
N23-0825	1/4	250	25

N23-0831

Tyre Pressure Gauge (for Cars)



Pen type, psi scale, features valve deflator and pocket clip, steel body (chrome finish)

CODE NO	psi	mm	
N23-0831	10-120	135	25

N23-0832

Tyre Pressure Gauge (for Commercial Vehicles)



Suitable for cars and commercial vehicles, psi scale, zamak head, steel body (chrome finish)

CODE NO	psi	mm	
N23-0832	10-150	300	25

N23-08VCT

Valve Core Tool



Used for removing and installing tyre valve pins.

CODE NO	mm	
N23-08VCT	70	12

N23-08TD

Digital Tyre Tread Depth Gauge



Metric and imperial readings, large display reading 0.01 mm, 1xCR2032 battery (included)

CODE NO	max. mm	
N23-08TD	25	1

N23-0525

Wheel Balancing Weight Pliers




For installing, removing and cutting balance weights

CODE NO	mm	
N23-0525	240	12

N23-0604

4 Piece Plastic Scraper Set

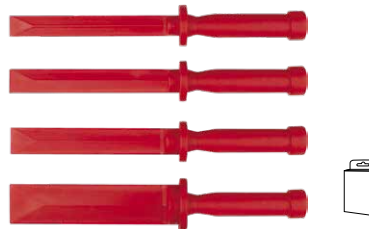

Used for removing balance leads from alloy wheels without damage, also used for removing labels and adhesives

CODE NO	mm	mm	
N23-0604	19, 22, 24, 36	265	1

N23-15 Series

Steering Arm Removal Wrenches



For removal of steering arms, for use with 30 mm wrenches
N23-15P: for cars, N23-15C: for commercial vehicles

CODE NO	∅ mm	mm	
N23-15P	34.5 - 39.5	430	1
N23-15C	37.5 - 44	435	1

N23-10

Universal Ball Joint Puller



For removing ball joint pivots of steering tie rods, stabilizers, etc., suitable for cars and light commercial vehicles

CODE NO	∅ mm	h max. mm	
N23-10	22	50	1

N23-11

Universal Ball Joint Puller (2-Stage Lever Position)



For removing ball joint pivots of steering tie rods, stabilizers, etc., especially for German cars

CODE NO	∅ mm	h max. mm	
N23-11	22	12-50	1

N23-12 Series

Ball Joint Pullers



For removing ball joint pivots of steering tie rods, stabilizers, etc.

CODE NO	WxH mm	∅ mm	
N23-1218	36x 38	18	1
N23-1225	45x 47	25	1
N23-1230	62x 66	30	1
N23-1240	62x 77	40	1
N23-1246	81x 81	46	1

12 Specialist Automotive Tools

N23-14 Series

Tie Rod / Ball Joint Separator



For fast removal of track rod and push rod ends, pitman arms and other parts of the steering

CODE NO	∅ mm	mm	
N23-1418	18	400	6
N23-1424	24	300	6

N23-18 Series

1/2" Drive Spreader Socket for Wheel Bearing Housings



12.5
1/2"

Used to expand the shock absorber and rod assembly (to separate the shock absorber from the rubber hub bearing housing)

CODE NO	∅ mm	mm	
N23-1850	5.0x7	60	6
N23-1855	5.5x8	50	6

N23-19DH

Seal Puller



Used for removing oil seals in the drivetrain without damaging the gasket and cast gasket seats.

CODE NO	mm	
N23-19DH	300	6

N23-42

Universal Clutch Aligner



For aligning / centering clutch plate to the pressure plate, for cars and commercial vehicles up to 5 tons, plastic body, supplied with 3 metal expansion mandrels

CODE NO	
N23-42	10

N23-38

Special Retaining Ring Pliers (Angled Jaws-Centering Hole)



For circlips on cardan shafts and gear boxes, angled tips with centering hole

CODE NO	mm	
N23-38	210	20

N23-39

Special Retaining Ring Pliers (Straight Jaws)



For circlips on outside lockrings (shafts) i.e.: gearboxes, chequered straight tips

CODE NO	mm	
N23-39	210	20

N31-1105

5 Piece Trim and Upholstery Removal Set



Set for trim and trim stud removal, durable polyamide material, minimum damage to panels

CODE NO	
N31-1105	1

N31-12

Trim Clip Removal Tool



Used to remove the plastic fixing clips on door trims

CODE NO	mm	
N31-12	150	6

N31-13

Trim Clip Removal Pliers



Used to remove the plastic fixing clips on door trims

CODE NO	mm	
N31-13	240	12

N31-13C

Trim Clip Removal Pliers



Used to remove the plastic fixing clips on door trims

CODE NO	mm	
N31-13C	170	12

N31-14

Wiper Arm Extractor



For the fast and safe removal of taper mounted windscreen wiper arms, ball-end thrust bolt

CODE NO	∅ mm	
N31-14	16	6

N31-APW2

Air Pump Wedge



For leveling of elements from gaps of 2 mm to 50 mm, pressure release valve, particularly suitable for opening of car doors

CODE NO	Pressure	WxH mm	
N31-APW2	approx. 100 kg/pc.	150x160	6

N33-01BMC2/MS

Bumping Hammer (Flat Round and Milled Square Head)



Stretching and planishing hammer, flat round face, chequered square face, genuine hickory wooden handle

CODE NO	mm	mm	mm	
N33-01BMC2/MS	43	43	335	6

N33-01SPF

Finishing Hammer (Milled Round and Straight Pein)



Finishing hammer with a straight, thin pein, milled round head, genuine hickory wooden handle

CODE NO	mm	mm	
N33-01SPF	43	335	6

N33-01BPF

Finishing Hammer (Flat Round and Pointed Pein)



Finishing hammer with a round, point pick, flat round head, genuine hickory wooden handle

CODE NO	mm	mm	
N33-01BPF	43	335	6



N33-02UA

Universal Anvil Dolly



Ground faces

CODE NO	WxDxH mm	
N33-02UA	61.5 x 70 x 63.5	6

N33-02PW

Wedge Dolly



Ground faces

CODE NO	WxDxH mm	
N33-02PW	64 x 112 x 25.8	6

N33-02CW

Curved Dolly



Ground faces

CODE NO	WxDxH mm	
N33-02CW	58.5 x 132 x 44.2	6

N33-02HE

Heel Dolly



Ground faces

CODE NO	WxDxH mm	
N33-02HE	80 x 60.5 x 29.5	6

N33-02TO

Toe Dolly



Ground faces

CODE NO	WxDxH mm	
N33-02TO	118.5 x 54.5 x 23.5	6

N33-02DE

Double End Dolly (Convex and Flat Head)



Ground faces

CODE NO	WxDxH mm	
N33-02DE	∅ 55.5 x ∅ 55.5 x 57.5	6

N33-02PWC

Curved Wedge Dolly



Ground faces

CODE NO	WxDxH mm	
N33-02PWC	126 x 66.5 x 27.5	6


12 Specialist Automotive Tools

N33-03SL

Long Single End Spoon (Flat End)



Enamelled with ground faces


CODE NO	LxWxH mm	
N33-03SL	391 x 56.8 x 25.8	6

N33-03SS

Short Single End Spoon (Flat End)



Enamelled with ground faces


CODE NO	LxWxH mm	
N33-03SS	286 x 51 x 68.5	6

N33-03DS

Double End Spoon (Angled and Flat Ends)



Enamelled with ground faces

CODE NO	LxWxH mm	
N33-03DS	401 x 59.5 x 172.7	6

N33-05C

Punch / Flange Combination Tool



Forms crimped edges on sheet metals, punches holes for spot-welding (MIG), time-saving tool

CODE NO	∅ mm	L mm	
N33-05C	5	10	1

N33-04

Bodywork File Holder (with spare body file)



For 14" bodywork files, control knob to adjust curve

CODE NO	mm	DELIVERY	
N33-04	370	N33-04F + N33-04R1	1
N33-04F	370	Holder only	1


N33-04R Series

Bodywork File (Curved Cut)



Flat, milled curved cut, long life

DuraMAX

CODE NO	mm	TPI*	
N33-04R1*	350	9	12
N33-04R2	350	12	12

TPI: Teeth per inch
* ex code N33-04R

N36-1002

Suction Lifter (Two Heads)



For glass, tiles, plastic, sheet metal etc., push-lock levers, holds up to 80 kg in horizontal position

CODE NO	∅ mm	mm	
N36-1002	115	370	1




N36-WRT

Bonded Windscreen Removal Tool



Used for removal of windscreens on vehicles, hardened cutting edge easily cuts through adhesive glass paste


CODE NO	mm	
N36-WRT	165	1

N36-WH2

Pair of Handles for Windscreen Bond Cutting Wire



Plastic handle holder tool for windscreen bond cutting wires, sold in pairs

CODE NO	mm	
N36-WH2	98	1


N36-CS0722

Windscreen Bond Cutting Wire



StainlessSteel

Used for cutting through adhesive glass paste around windscreens

CODE NO	mm	m	
N36-CS0722	0.7	22	20




Chapter /1 Page 37




N37-02SM1
Small Mouth Pull Clamp




Single way operation pull clamp for tight spaces
Clamping Area: width 44 mm / depth 24 mm

CODE NO	CAPACITY ton	
N37-02SM1	5	1

N37-02SM2
Small Mouth Pull Clamp (Two Way)

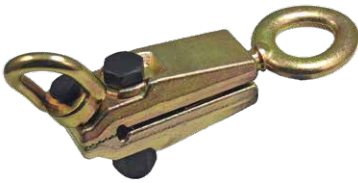

Two way operation pull clamp for tight spaces
Clamping Area: width 44 mm / depth 24 mm

CODE NO	CAPACITY ton	
N37-02SM2	5 (I) -2 (II)	1



N37-02AJ1
Asymmetric Jaw Pull Clamp



Single way operation pull clamp, asymmetric jaws
Clamping Area: width 37 mm / depth 15 mm

CODE NO	CAPACITY ton	
N37-02AJ1	3	1

N37-02SJ1
Symmetric Jaw Pull Clamp




Single way operation pull clamp, symmetric jaws
Clamping Area: width 37 mm / depth 15 mm

CODE NO	CAPACITY ton	
N37-02SJ1	3	1

N37-02FR1
Frame Rack Pull Clamp





Single way operation, flat profile pull clamp
Clamping Area: width 118 mm / depth 18 mm

CODE NO	CAPACITY ton	
N37-02FR1	5	1

N41-10
Battery Fluid Tester




Suitable for measuring the electrolyte density inside battery fluid,
tubular composite body, easy to read indicator

CODE NO		
N41-10	200	10

G09-11
Car Electric Circuit Tester




Brass body with test light, 850 mm cable with alligator clip


CODE NO	DC (V)	
G09-11	6-24	10

G09-16
Car Electric Circuit Tester - Pro



Spring loaded, pointed probe for testing through insulation, twin LEDs indicate live circuit and polarity, 850 mm cable with alligator clip

CODE NO	DC (V)	
G09-16	3-48	10



12 Specialist Automotive Tools

N42-01M10

1/2" Drive Spline (XZN) Alternator Socket



For the removal and installation of the V-(ribbed) belt pulley on the alternator



CODE NO		 mm	
N42-01M10	M10	17	25

N42-01T50

1/2" Drive TORX Alternator Socket



For the removal and installation of the V-(ribbed) belt pulley on the alternator

CODE NO		 mm	
N42-01T50	T50	17	25

N42-01K13

13 Piece Alternator Pulley Removal Kit



CASE WxHxD (mm)
245 X 129 X 40

Complete kit for the removal and installation of the V-(ribbed) belt pulley on the alternator


CODE NO	
N42-01K13	1

N43-01K1UNI

12 Piece Terminal Release Tool Kit (Universal)



CASE WxHxD (mm)
315 x 155 x 50


CODE NO	
N43-01K1UNI	1
N43-01T 12 PC: (01 + 02 + 04 + 01S + 02S + 04S + 10 + 14 + 15 + 20 + 30 + 31)	
Ref. CE-01, CE-05, CE-02, 01S, 02S, 04S, CE-56, CE-59, CE-62, CE-91, CE-74, CE-53)	

N43-01K1VAG

11 Piece VW/Audi Terminal Release Tool Kit (VAG)



CASE WxHxD (mm)
315 x 155 x 50

CODE NO	
N43-01K1VAG	1
N43-01T 11 PC: (01 + 04 + 01S + 04S + 10 + 11 + 12 + 13 + 20 + 30 + 31)	
Ref. CE-01, CE-02, 01S, 04S, CE-56, CE-56-1, CE-57, CE-58, CE-91, CE-74, CE-53)	



N43-01T Series

Ejection Tools (for Round Contacts)




For round snap-in receptacles, including dismantling sleeve, folding handle design

Applications:

N43-01T01 + N43-01T01S: BMW, Mercedes-Benz, Fiat, MAN, Opel, Porsche, Seat, Skoda, VW/Audi

N43-01T02 + N43-01T02S: Ford, Opel, PSA, Renault

N43-01T04 + N43-01T04S: BMW, Mercedes-Benz, Fiat, MAN, Opel, Porsche, Seat, Skoda, VW/Audi



CODE NO	Ref.	∅ mm	
N43-01T01	CE-01	1.5	1
N43-01T02	CE-05	2.3	1
N43-01T04	CE-02	3.5	1

N43-01TS Series

Spare Dismantling Sleeves (for N43-01T Series)



Spare sleeves for use with N43-01T01 to N43-01T04

CODE NO		L mm	
N43-01T01S	N43-01T01	30	1
N43-01T02S	N43-01T02	35	1
N43-01T04S	N43-01T04	24	1

N43-01T10

Ejection Tool (for Micro-Timer II, III Contacts)



For flat plug-in sockets, Micro-Timer II, III contacts, folding handle design

Applications:

Mercedes-Benz, Opel, Porsche, PSA, Renault, Saab, Seat, Skoda, VW/Audi

CODE NO	Ref.	□ mm	
N43-01T10	CE-56	1.6	1

N43-01T11


Ejection Tool (for Flat Plug-in Sockets) - 0.64 mm



For flat plug-in sockets with asymmetrically positioned latches in terminals with two release channels, folding handle design

Applications:

Seat, Skoda, VW/Audi

CODE NO	Ref.	□ mm	
N43-01T11	CE-56-1	0.64	1

N43-01T/12-13


Ejection Tools (for Flat Plug-in Sockets)



For flat plug-in sockets with asymmetrically positioned latches in terminals with two release channels, folding handle design

Applications:

Seat, Skoda, VW/Audi

CODE NO	Ref.	□ mm	
N43-01T12	CE-57	2.8	1
N43-01T13	CE-58	4.8	1

N43-01T14


Ejection Tool (for Flat Plug-in Sockets)



For flat plug-in sockets, Maxi Power Timer contacts, folding handle design

Applications:

Mercedes-Benz, VW/Audi

CODE NO	Ref.	□ mm	
N43-01T14	CE-59	9.5	1

N43-01T15


Ejection Tool (for Pit-Pod Contacts)



For flat plug-in sockets, Pit-Pod contacts, folding handle design

Applications:

For all vehicle makes

CODE NO	Ref.	□ mm	
N43-01T15	CE-62	various	1

N43-01T20

Ejection Tool (for JPT/SPT Contacts)



For flat plug-in sockets in terminals with two release channels, JPT/SPT contacts, folding handle design

Applications: BMW, Mercedes-Benz, Fiat, Ford, MAN, Opel, PSA, Renault, Saab, VW/Audi

CODE NO	Ref.	□ mm	
N43-01T20	CE-91	2.8, 5.8	1

N43-01T30


Ejection Tool (for Micro-Timer I Contacts)



For flat plug-in sockets, Micro-Timer I contacts and ABS plug-in housing, folding handle design

Applications:

Fiat, Ford, Mazda, Opel, PSA, Renault, Saab, VW/Audi

CODE NO	Ref.	□ mm	
N43-01T30	CE-74	1.6	1

N43-01T/31-32

Ejection Tools (for Standard Flat Contacts)




For flat plug-in sockets locked in terminals with single release channel, folding handle design

Applications:

N43-01T31: BMW, Mercedes-Benz, Ford, MAN, Opel, Porsche, PSA, Renault, Seat, Skoda, VW/Audi

N43-01T32: BMW, PSA, Renault

CODE NO	Ref.	□ mm	
N43-01T31	CE-53	2.8, 5.8	1
N43-01T32	CE-54	2.8	1

13 Measuring Tools

182 | 184



P01 Series Pro Brake Tape Measures

Pro Brake



EEC class II accuracy, double-side printed blades with nylon coating, magnetic hook, self-lock stop, piano black ABS case

CODE NO	m	mm	
P01-0522	5	22	8•
P01-0527	5	27	8•
P01-0827	8	27	8•

P05B Series Tape Measure (Soft Touch)

Compact
Pro



EEC class II accuracy, magnetic hook, double stop, soft touch ABS case

CODE NO	m	mm	
P05B-0519	5	19	8•
P05B-1025	10	25	8•

P05 Series Tape Measures (Metric)

Compact



EEC class II accuracy, metric, double stop

CODE NO	m	mm	
P05-0316	3	16	12•
P05-0516	5	16	12•
P05-0519	5	19	12•
P05-0525	5	25	12•
P05-1025	10	25	8•

P03 Series C-Pro Tape Measures

C
Pro



EEC class II accuracy, double-side printed blades, softgrip ABS case

CODE NO	m	mm	
P03-0316	3	16	12•
P03-0519	5	19	8•
P03-0525	5	25	8•

P05S-0519 Tape Measure (Stainless Steel)

Compact
Stainless



All metallic components in stainless steel, perfect for wet environments, EEC class II accuracy, double stop

CODE NO	m	mm	
P05S-0519	5m	19	12•

P05A Series Tape Measures (Inch/Metric)

Compact



EEC class II accuracy, inch/metric, double-stop

CODE NO	m/ft	mm	
P05A-0316	3m-10ft	16	12•
P05A-0519	5m-16ft	19	12•

P10 Series

C-Grip Long Tape Measures (Fiberglass Blade)



EEC class II accuracy, double side printed fiberglass blade, loop with retractable claw, softgrip ABS case, geared rewind mechanism

CODE NO	m	mm	
P10-10	10	15	1
P10-20	20	15	1
P10-30	30	15	1

P05-AD2

Adhesive Tape Measure



EEC class II accuracy adhesive tape, can be cut to size, ideal for workbenches, saw tables, counters etc.

CODE NO	m	mm	
P05-AD2	2	13	12

P17-B03

Chalk Line Set



Self-chalking line, metal end support, softgrip ABS case, folding winder, supplied complete with a bottle of chalk and line level

CODE NO	m	
P17-B03	30	6

P07 Series

C-Pro Long Tape Measures (Steel Blade)



EEC class II accuracy, steel blade, loop with retractable claw, ergonomic plastic frame, geared rewind mechanism

CODE NO	m	mm	
P07-20	20	13	1
P07-30	30	13	1
P07-50	50	13	1

P07TT Series

Tank Dipping Tape Measures (Stainless Steel Blade) **new**



StainlessSteel

For depth measurement of liquids in tanks or silos, EEC class II accuracy, stainless steel blade, aluminium frame construction
Tapes ship with P07TT-DW dipping weight

CODE NO	m	mm	
P07TT-10	10	13	1
P07TT-20	20	13	1

P07TT-DW

Dipping Weight (for P07TT Series) **new**



Engraved scale, MS58 brass material

CODE NO	mm	g	
P07TT-DW	90	280	1

P45D

Digital Vernier Caliper



StainlessSteel

Metric and imperial reading, large display reading 0.01 mm and 0.0005", zero setting control, depth gauge, stainless steel body, 1xSR44 battery (included), supplied in plastic case

CODE NO	mm	mm	
P45D	0-150	0-6	10

P45A

Vernier Caliper



StainlessSteel

Metric reading 0.02 mm, depth gauge, stainless steel body, supplied in plastic case

CODE NO	mm	mm	
P45A	0-150	0-6	10

P47 Series

External Micrometers



0.01 mm graduations, clamping ring and ratchet stop, carbide tipped anvils, heat plates, supplied in plastic case

CODE NO	mm	
P47-025	0- 25 mm	1
P47-050	25- 50 mm	1
P47-075	50- 75 mm	1
P47-100	75-100 mm	1

P15 Series

Stainless Steel Rules



StainlessSteel

Precision class II, metric, stainless steel, photoengraved, anti-reflection treatment, supplied in pouch

CODE NO	cm	mm	
P15-015	15	13	50
P15-030	30	25	10
P15-050	50	30	10
P15-100	100	30	10

13 Measuring Tools

P54-20S Feeler Gauge (Metric-20 Blade)




100 mm long tapered blades, hardened and polished, steel case with thumbscrew

CODE NO	mm	mm	
P54-20S	0.05-1.00	100	6

P54A-25S Feeler Gauge (SAE-25 Blade)




100 mm long tapered blades, hardened and polished, steel case with thumbscrew

CODE NO	inch	mm	
P54A-25S	.002 - .025	90	6

P55-52MW Screw Pitch Gauge (Metric / Whitworth - 52 Blade)




For ISO 60° metric and Whitworth 55° threads, stainless steel
Metric: 0.25, 0.30, 0.35, 0.40, 0.45, 0.5, 0.6, 0.7, 0.75, 0.8, 0.9, 1.0, 1.25, 1.5, 1.75, 2.0, 2.5, 3.0, 3.5, 4.0, 4.5, 5.0, 5.5, 6.0 mm
Whitworth: 4, 4-1/2, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 16, 18, 19, 20, 22, 24, 25, 26, 28, 30, 32, 36, 40, 48, 60, 62 TPI

CODE NO	mm	TPI	
P55-52MW	0.25-6	62-4	5

P26 Series Level Vials



Special phosphorescent liquid, ultrasonically sealed, quality acrylic body

CODE NO	mm	mm	mm	
P26-BE1	18	9	-	12•
P26-BH1	-	15	36	12•
P26-SH1	9.5	-	31	50•

P20D-060 Electronic Spirit Level


new

30 Years Vial Warranty



ACCUVISION+

Easy reading of large, illuminated display; numbers rotate when using upside down; four audible indicators; digital resolution 1mm/m ultrasonic welded block vials, replacable shockproof end caps, milled base, heavy duty aluminum box profile, hand grips

CODE NO	mm	
P20D-060	60	2


P20 Series Aluminium Spirit Levels (Heavy Duty)

30 Years Vial Warranty



ACCUVISION+

Pro quality, 0.50 mm/m (.0029) accuracy, ultrasonic welded block vials, replacable shockproof end caps, milled base, heavy duty aluminum box profile, hand grips


CODE NO	mm	
P20-060	60	2
P20-080	80	2
P20-100	100	2
P20-120	120	2

P24M-022 Torpedo Level (Cast Body)

new design



Pro quality, 3 vials, 0.50 mm/m (.0029) accuracy, ultrasonic welded block vials, built-in magnets

CODE NO	mm	
P24M-022	22	12


P21 Series Aluminium Spirit Levels

ACCUVISION

30 Years Vial Warranty



Pro quality, 0.5 mm/m (0.029°) accuracy, ultrasonic welded block vials, shockproof end caps, rigid aluminium box profile

CODE NO	mm	
P21-030	30	10
P21-040	40	10
P21-050	50	10
P21-060	60	10
P21-070	70	10
P21-080	80	10
P21-100	100	10
P21-120	120	10
P21-150	150	10


P21-M Series Aluminium Spirit Levels (Magnetic Base)

ACCUVISION

30 Years Vial Warranty



Pro quality, 0.5 mm/m (0.029°) accuracy, ultrasonic welded block vials, shockproof end caps, rigid aluminium box profile, built-in rare earth magnets

CODE NO	mm	
P21-040M	40	10
P21-050M	50	10
P21-060M	60	10
P21-080M	80	10
P21-100M	100	10
P21-120M	120	10


P21-012M Aluminium Spirit Levels (Mini)

ACCUVISION

30 Years Vial Warranty



Pro quality, 0.5 mm/m (0.029°) accuracy, ultrasonic welded block vials, shockproof end caps, rigid aluminium box profile, built-in magnets, for horizontal measurement

CODE NO	mm	
P21-012M	12	10

14 General Maintenance and Workshop Tools

185 | 201



Lu-MAX

Powerful and uniform illumination

Ceta Form has invested into a joint venture in Asia specialized in the production of LED work lamps in 2021. In this catalogue, we are pleased to show the range manufactured in this plant – truly better in design and performance. Thanks to the capabilities this new plant will provide, we aim to be an important player in the ever growing LED work lamp market.

**100%
CETA FORM
Design**

All work lights in this section excluding the flashlights are concept designed in the Ceta Form design labs. The electronic engineering is done by our expert team in the Weihai factory.



R10-MAX01

Rechargeable LED Work Light

Main light: 10W COB LED 1000-500-250 lumens

Top light: 4W SMD LED 150 lumens

CRI: 80 CRI+ **CCT:** 6500K

Battery: 3.7V 2600 mAh Li-ion

Runtime: 2 h- 4 h - 8 h / Top light 7 h

Charging time: 3.5 h, battery level indicator

Protection class: IP65 / IK07

HxWxD: 268 x 61 x 42 mm / 339 g



**1000
lumen**



150 Lumens



3 Levels

180°
Flexible HandleMagnetic
Back & Bottom5V-1A
USB Type C

R10-MAX02

Rechargeable LED Work Light

Main light: 7W COB LED 700-350-175 lumens

Top light: 4W SMD LED 100 lumens

CRI: 80 CRI+ **CCT:** 6500K

Battery: 3.7V 2600 mAh Li-ion

Runtime: Main light 2 h, 4 h, 8 h / Top light 10 h

Charging time: 3.5 h, battery level indicator

Protection class: IP54 / IK07

HxWxD: 268 x 61 x 42 mm / 330 g




**700
lumen**



100 Lumens



3 Level

180°
Flexible HandleMagnetic
Back & Bottom5V-1A
USB Type C

14 General Maintenance and Workshop Tools



500
lumen



100 Lumens



2 Level



180°
Flexible Handle



Magnetic
Bottom



5V-1A
USB Type C



150
lumen



80 Lumens



80 Lumens



Magnetic
Back



5V-1A
USB Type C

R10-MIDI

Midi Rechargeable LED Work Light

Main light: 6W COB LED 500-250 lumens

Top light: 3W SMD LED 100 lumens

Battery: 3.7V 2600 mAh Li-ion

Runtime: Main light 3.5 h - 5 h / Top light 10 h

Charging time: 3.5 h, battery level indicator

Protection class: IP54 / IK07

HxWxD: 199 x 56 x 36 mm / 214 g

R10-MINI1

Rechargeable LED Pen Work Light

Main light: 3W COB LED 150 lumens

Top light: 1W SMD LED 80 lumens

Battery: 3.7V 800 mAh Li-ion

Runtime: Main light 3 h / Top light 5 h

Charging time: 2 h

Protection class: IP20 / IK07

HxWxD: 165 x 25x 27mm / 62 g

UV Leak Detection Work Light

Helps detect leakages in cooling systems of cars. Used with UV detection liquid. Main light is UV spec, top light is standard LED spec.



395
Nanometer



R10-MIDI/UV

Midi Rechargeable Leak Detection LED Work Light – UV


Main light: 3W COB LED, 395 nanometer
Top light: 4W SMD LED, 100 lumens
Battery: 3.7 V 2600 mAh Li-ion
Runtime: Main light UV - 4.5 h / Top light 10 h
Charging time: 3.5 h
Protection class: IP54 / IK07
HxWxD: 199 x 56 x 36 mm / 212 g

Color Proofing LED Work Light

Due to the special LED features, this lamp replicates daylight. Perfect for any paint, polish, cleaning or prep-zone operation.



300
lumen

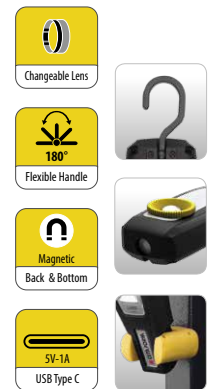


R10-CLR1

Midi Rechargeable Color Proofing LED Work Light

Main light: 10W COB LED, 300/270/250 lumens
Top light: 100 lumens
CRI: 96 CRI+ **CCT:** 2700K - 4500K - 6500K
Battery: 3.7 V 2600 mAh Li-ion
Runtime: Main light 3.5 h / Top light 10 h
Charging time: 3.5 h
Protection class: IP54 / IK07
HxWxD: 198 x 57 x 40 mm / 235 g

14 General Maintenance and Workshop Tools

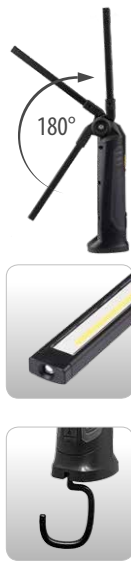

**1000
lumen**



**300
lumen**



R10F-SLIM01

Folding LED Work Light - Slim

Flood light: 10W COB LED, 1000 / 500 / 250 lumens

Spot light: Super Bright LED 150 lumens

CRI: 80 CRI+ **CCT:** 6500K

Battery: 3.7 V 2600 mAh Li-ion

Runtime: Flood light 2 h - 4 h - 8 h / Spot light 7 h

Charging time: 3.5 h, battery level indicator

Protection class: IP65 / IK07

HxWxD: 195/348 x 46 x 60 mm / 292 g

R10F-SLIM02

Folding LED Work Light - Ultra Slim

Flood light: Super Bright COB LED, 300 / 150 lumens

Spot light: Super Bright LED / 80 lumens

Back light: COB LED 200 lumens

CRI: 80 CRI+ **CCT:** 6500K

Battery: 3.7 V 800 mAh Li-ion

Runtime: Flood light 1.5 h - 3 h, Spot light 2 h, Back light 3 h

Charging time: 2 h, battery level indicator

Protection class: IP54 / IK07

HxWxD: 158/301 x 20 x 25 mm / 95 g

1000
lumen



R10F-TRCH1

Swivel Head LED Torch

Floodlight: 10W Super Bright LED,
1000 / 500 / 250 lumens

CRI: 70 CRI+ **CCT:** 6500K

Battery: 3.7V 2600 mAh Li-ion

Runtime: 2 - 4 - 7 h

Charging time: 3.5 h, battery level indicator

Protection class: IP65 / IK07

HxWxD: 251 x 46 x 60 mm / 325 g

400
lumen



R10-COM1

Compact Rechargeable LED Work Light

Main light: 3W COB LED
Normal Mode: LED 400 lumens, Eco Mode: 120 lumens

CRI: 80 CRI+ **CCT:** 6500K

Battery: 3.7V 1500 mAh Li-Po

Runtime: 3 h - 8,5 h

Charging time: 3 h, battery level indicator

Protection class: IP54 / IK07

HxWxD: 127 x 69 x 33 mm / 166 g

14 General Maintenance and Workshop Tools

new

1200 lumen



R10-ALCOM1



Compact Rechargeable LED Work Light (Alu Line)
Main light: 10W COB LED 1200-600-80 lumens
Top light: 2W SMD LED 100 lumens
CRI: 80 CRI+ **CCT:** 6000-7000K
Battery: 3.7 V 2000 mAh Li-ion
Runtime: 1,5 h - 5,5 h - 10 h / Top light 12 h
Charging time: 3 s, battery level indicator
Protection class: IP65 / IK07
HxWxD: 116 x 45 x 26 mm / 147 gr



1000 lumen

R14-CF10

Rechargeable Compact LED Floodlight
Floodlight: 10W COB LED, High Mode: 1000 lumens, Normal Mode: 500 lumens, Eco Mode: 250 lumens
Flashlight: SMD LED / 250 lumens
CRI: 80 CRI+ **CCT:** 5500 - 6500K
Battery: 3.7 V 2600 mAh Li-ion
Runtime: Floodlight 2 h, 5 h, 10 h / Flashlight 6 h
Charging time: 3.5 h, battery level indicator
Protection class: IP65 / IK07
HxWxD: 91 x 84 x 52 mm / 267 g



new

300 lumen



R10-ALPEN1



Rechargeable LED Pen Light (Alu Line)
Main light: 3W COB LED 300 lumens
Top light: 2W SMD LED 200 lumens
Battery: 3.7V 700 mAh Li-ion
Runtime: Main light 2 h / Top light 3 h
Charging time: 2 h
Protection class: IP20 / IK07
HxWxD: 170 x 21 x 20 mm / 58 gr



2000 lumen

R14-CF20

Rechargeable Compact LED Floodlight
Floodlight: 20W COB LED, High Mode: 2000 lumens, Normal Mode: 1000 lumens, Eco Mode: 500 lumens
Flashlight: SMD LED / 450 lumens
CRI: 80 CRI+ **CCT:** 5500 - 6500K
Battery: 3.7 V 5000 mAh Li-ion
Runtime: Floodlight 2 h, 4 h, 7 h / Spot light 5 h
Charging time: 4 h, battery level indicator
Protection class: IP65 / IK07
HxWxD: 113 x 104 x 62 mm / 380 g





wireless
charge

Lumax Wireless Charging System

Ideal for workshops and garages where LED work lights are frequently used. Wall mounted dock wireless charging system eliminates the need for multiple number of chargers and charge points. Increased efficiency in workshops.



1000
lumen



150 Lumens



3 Levels



180°
Flexible Handle



Magnetic
Back & Bottom



5V-1A
USB Type C



Up to 3 charging docks can be connected to each other for simultaneous charging of multiple lights



R10W-MAX01

Rechargeable LED Work Light – Wireless Charge

Main light: 10W COB LED 1000-500-250 lumens

Top light: 4W SMD LED 150 lumens

CRI: 80 CRI+ CCT: 6500K

Battery: 3.7V 2600 mAh Li-ion

Runtime: 2 h- 4 h - 8 h / Top light 7 h

Charging time: 3.5 h, battery level indicator

Protection class: IP65 / IK07

HxWxD: 268 x 61 x 42 mm / 339 g

R10W-DCK1

Wireless Charging Dock

TYPE-C port input voltage: 5V/9V/12V

TYPE-C port input current: 1-3A

Wireless charging power: 5W / 7.5W / 10W / 15W(MAX)

Wireless charging voltage: 5V / 9V / 12V

Wireless charging current: 5V-1A / 9V-1.6A / 12V-1.2A

USB Output Voltage: 5V-2A

Bottom Magnetic: $\geq 34N$

Working Temperature: -10~+40°C


Protection class: IK07

HxWxD: 116 x 112 x 17 mm / 253 g

14 General Maintenance and Workshop Tools



Innovative lighting

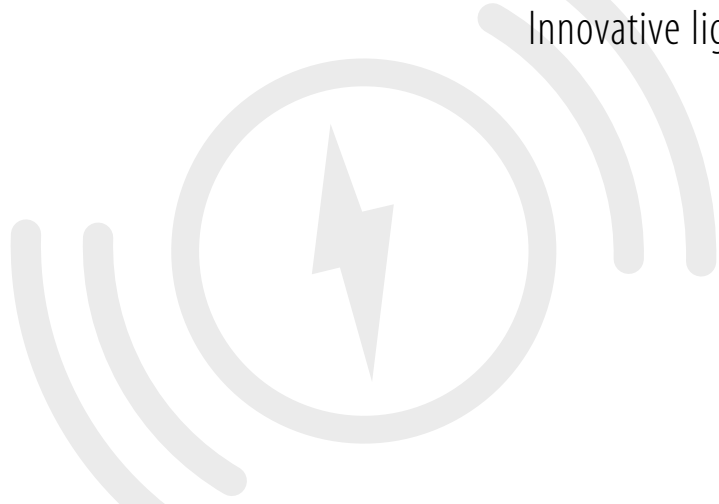

R10FW-SLIM01

Slim Folding LED Work Light – Wireless Charge

Flood light: 10W COB LED, 1000 – 500 – 250 lumens

Spot light: Super Bright LED 150 lumens

CRI: 80 CRI+ **CCT:** 6500K

Battery: 3.7V 2600 mAh Li-ion

Runtime: Flood light 2 h – 4 h – 8 h / Spot light 7 h

Charging time: 3.5 h, battery level indicator

Protection class: IP65 / IK07

HxWxD: 348 x 46 x 60 mm / 320 g

R14W-CF20

Compact LED Floodlight - Wireless Charge

Floodlight: 20W COB LED, 2000 – 1000 – 500 lumens

Normal Mode: 1000 lumens, **Eco Mode:** 500 lumens

Spot light: Super Bright LED / 450 lumens

CRI: 80 CRI+ **CCT:** 5500 – 6500K

Battery: 3.7V 5000 mAh Li-ion

Charging time: 4 h

Runtime: Floodlight 2 h, 4 h, 7 h / Spot light 5 h

Protection class: IP65 / IK07

HxWxD: 118 x 104 x 62 mm / 380 g



400 lumen



TPE liner for forehead comfort

R12-PRO1

Rechargeable LED Headlamp (Motion Sensor)

Main light: 4W COB LED
 Normal Mode: 400 lumens, Eco Mode: 200 lumens
 CRI: 80 CRI+ CCT: 6500K
 Battery: 3.7V 1500 mAh Li-ion
 Runtime: 2 h - 6 h
 Charging time: 2.5 h
 Protection class: IP65 / IK07
 HxWxD: 47.5 x 78.5 x 42 mm / 110 g



500 lumen




TPE liner for forehead comfort

SPOTLIGHT / FLOODLIGHT

R12-FLS1

Rechargeable LED Headlamp (Motion Sensor)

Flood light: 3W COB LED
 Flood light+Spot light: 500 lumens
 CRI: 80 CRI+ CCT: 6500K
 Battery: 3.7V 1500 mAh Li-ion
 Runtime: Flood light: 3 h, Spot Light: 3 h / 8 h, Flood+Spot: 1.5 h
 Charging time: 2.5 h
 Protection class: IP65 / IK07
 HxWxD: 78.5 x 47.5 x 42 mm / 128 g



200 lumen



TPE liner for forehead comfort

R12-CLR1

Color Proofing Rechargeable LED Headlamp (Motion Sensor)

Main light: 6W COB LED, 200 lumens
 CRI: 96 CRI+ CCT: 2700K / 4500K / 6500K
 Battery: 3.7V 1500 mAh Li-ion
 Runtime: 3.5 h
 Charging time: 2.5h
 Protection class: IP65 / IK07
 HxWxD: 50 x 77 x 45 mm / 110 g



150 lumen



TPE liner for forehead comfort

R12-BAT1

LED Headlamp (3AAA)

Main light: 3W COB LED
 Normal Mode: 150 lumens, Eco Mode: 30 lumens
 S.O.S Function
 CRI: 80 CRI+ CCT: 6500K
 Battery: 3x1.5V AAA battery (not included)
 Runtime: 2 h - 8 h
 Protection class: IP20
 HxWxD: 50 x 78 x 43 mm / 65 g



14 General Maintenance and Workshop Tools

LU-MAX PRO Professional Focus Flashlights

The top flashlight programme of Ceta Form

This range is developed to the needs of the most demanding user profiles. From batteries to LED chips, aluminium material to chipboards all components used are of top-notch quality. Any professional user will appreciate the performance and build quality after a short period of use.



R.P6

Focus Flashlight 2AA

LED CREE XPG2 S3
 MODE On / Off
 Output 250 lumens
 Run time 9 h
 2xAA battery (included)
 Beam Distance 89 m
 Intensity 2000cd
HxWxD: 150.3 x Ø28.2 x Ø20.4 mm

R.P5R

Rechargeable Focus Flashlight

Samsung LED
 MODE Low/Middle/High
 Output 20/150/450 lumens
 Run time 12 h-4 h-3 h
 880 mAh Li-Ion pil (14500),
 Battery level indicator
 Beam Distance 141 m
 Intensity 5000cd
HxWxD: 113 x Ø35 x Ø26 mm

R.P7R

Rechargeable Focus Flashlight

Samsung LED
 MODE Low/Middle/High
 Output 20/250/1000 lumens
 S.O.S Function
 Runtime 35 h-5 h-2.5 h
 2600 mAh Li-Ion battery (18650)
 Beam Distance 89 m
 Intensity 8000cd
 Charging time: 3.5 h Battery level indicator
HxWxD: 154 x Ø35 x Ø26 mm

R.P-BP

High Quality Tetron Belt Pouch (for R.P Series)

R.P6, R.P7, R.P5R, R.P7R, R.L7R



new

**2000
lumen**



**900
lumen**



R.P8R

Rechargeable Focus Flashlight

LED CREE
 MODE Low / Middle / High
 Output 440/1000/2000 lumens
 Runtime 4 h-2 h
 5000 mAh Li-Ion battery (21700)
 Beam Distance 200 m
 Intensity 10000cd
 Charging time: 3.5 h Battery level indicator
HxWxD: 160 x Ø35 x Ø28 mm

R.L7R

Rechargeable Focus Flashlight

Samsung LED
 MODE Low / Middle / High / UV
 Output 90/400/900 lumens
 Runtime 20 h-4 h-3 h
 2600 mAh Li-Ion battery (18650)
 Beam Distance 134 m
 Intensity 2000cd
 Charging time: 3.5 h
 Battery level indicator
HxWxD: 159 x Ø35 x Ø26 mm

14 General Maintenance and Workshop Tools



LED Flashlights

A range of sturdy, compact and powerful flashlights

Comes with focus function on most models for concentrated and focused light beam.

Manufactured from military grade high quality aluminum material.

All models with either strap or pocket clip.



105
lumen



100
lumen



70
lumen



R11-PRO

Professional LED Flashlight

3W LED

10-105 lumens

Aluminium body

Zoom feature

3xAAA batteries (included)

Pack Quantity: 12

HxWxD: 136 x Ø26 x Ø30 mm

R11-PEN

Stylus LED Flashlight

1W LED

100 lumens

Aluminium body

Zoom feature

2xAAA battery (not included)

Pack Quantity: 12

HxWxD: 150 x Ø16 x Ø17 mm

R11-MINI

Pocket LED Flashlight

1W LED

70 lumens

Aluminium body

Zoom feature ~ 5 m

3xAAA batteries (not included)

Pack Quantity: 12


HxWxD: 100 x Ø27 x Ø30 mm

M01 Series

Two Arm Universal Pullers




Can be used as internal and external puller by inverting the hooks, durable spindle

CODE NO	W mm	H mm	
M01-0810	80	100	1
M01-1310	130	100	1
M01-1615	160	150	1
M01-2015	200	150	1
M01-2520	250	200	1
M01-3520	350	200	1

M01-S05

5 Piece Two Arm Universal Puller Display



CODE NO	
M01-S05	1


5 PC: M01-0810, M01-1310, M01-1615, M01-2015, M01-2520

M05 Series

3-Arm Pullers (Self Centering Jaws)



Automatic centering, durable spindle


CODE NO	W mm	H mm	
M05-1010	100	100	1
M05-1616	160	160	1

M10S Series

Flat Separators – (External Bearing Puller Holder Jaws)



Separator is closed by tightening nuts on stud bolts, in conjunction with M10P series


CODE NO	Ø mm	
M10S-0460	4- 60	1
M10S-0680	6- 80	1
M10S-1011	10-110	1

M20-KIT1

Bearing Extractor Kit




Helps catch bearings between the races by properly shaped tips in kit. For 6004, 6010, 6200, 6205, 6300, 6304, 61812, 61816 bearings

CODE NO	Ø mm	
M20-KIT1	20-95	1

R09F Series

Bench Vices (with Integrated Pipe Jaws)

new




CODE NO	JAW WIDTH mm	CAPACITY mm	
R09F-100	100	120	1
R09F-125	125	160	1
R09F-150	150	200	1
R09F-175	175	210	1

R09F-SK Series

Swivel Base Kits

new




CODE NO	
R09F-SK100 Swivel Base Kit - for R09F-100	1
R09F-SK125 Swivel Base Kit - for R09F-125	1
R09F-SK150 Swivel Base Kit - for R09F-150	1
R09F-SK175 Swivel Base Kit - for R09F-175	1


R03K-NRC

Hand Riveter Kit (for Nuts/Rivets) - New Generation




2.4 - 3.2 - 4.0 - 4.8	M3 - M4 - M5 - M6
-----------------------	-------------------

CODE NO	
R03K-NRC	1




R01-STD/M10


4 PC: Nozzle Bolts




Adapters Nut



4 PC: Pop Rivet Head



4 PC: Nozzle Nuts



Wrench

R04K


Long Reach Riveter Kit (for Nuts/Rivets)



BAG WxHxD (mm)
340 X 220 X 50

3.2 - 4.0 - 4.8 - 6.4	M4 - M5 - M6 - M8 - M10
-----------------------	-------------------------

For blind rivets and rivet nuts, foldable body riveter, very strong compared to regular riveters

CODE NO	
R04K	1

Content :
 Long reach riveter (1 pc.), Wrenches (3 pc.), Rivet head (5 pc.), Rivet head adaptor nut (1 pc.), Rivet head bolt (5 pc.), Rivet nut bearing nut loaf (5 pc.), Rivet nut adaptor (1 pc.)



14 General Maintenance and Workshop Tools

R03K-M Series

Replacement Nozzle Bolts (for R03K-NRC)



CODE NO	M	
R03K-M03	M3	6•
R03K-M04	M4	6•
R03K-M05	M5	6•
R03K-M06	M6	6•

R03K-S Series

Replacement Nozzle Nuts (for R03K-NRC)



CODE NO	M	
R03K-S03	M3	6•
R03K-S04	M4	6•
R03K-S05	M5	6•
R03K-S06	M6	6•

R04K-M Series

Replacement Nozzle Bolts (for R04K)



CODE NO	M	
R04K-M04	M4	6•
R04K-M05	M5	6•
R04K-M06	M6	6•
R04K-M08	M8	6•
R04K-M10	M10	6•

R04K-S Series

Replacement Nozzle Nuts (for R04K)



CODE NO	M	
R04K-S04	M4	6•
R04K-S05	M5	6•
R04K-S06	M6	6•
R04K-S08	M8	6•
R04K-S10	M10	6•

R04K-AS

Rivet Nut Adaptor (for R04K)



CODE NO	
R04K-AS	6•

R03K-RTC

Ratcheting Riveter Kit (Nuts/Studs)



Capacities:

Blind rivet nuts M4 to M12 aluminium/steel/stainless steel
Blind rivet studs M5/M6/M8 aluminium/steel/stainless steel

CODE NO	
R03K-RTC	1
M12	
M10	
M6	
M5	
M4	
M5	
M6	
M8	

R03K-RTC-NM Series

Replacement Rivet Nut Bolts (for R03K-RTC)

new



CODE NO	M	
R03K-RTC-NM04	M4	6•
R03K-RTC-NM05	M5	6•
R03K-RTC-NM06	M6	6•
R03K-RTC-NM08	M8	6•
R03K-RTC-NM10	M10	6•
R03K-RTC-NM12	M12	6•

R03K-RTC-SM Series

Replacement Stud Rivet Nut Bolts (for R03K-RTC)

new



CODE NO	M	
R03K-RTC-SM05	M5	6•
R03K-RTC-SM06	M6	6•
R03K-RTC-SM08	M8	6•

R03K-PT

2-in-1 Power Tool Attachment for Rivets and Nuts



Easily converts cordless, pneumatic or corded drills into a power rivet / rivet nut setter, features durable bearings, supplied complete with accessories in a plastic case

CODE NO	
R03K-PT	1
Rivet Adaptor	
Rivet Nut Adaptor	
	3.2 - 4.0 - 4.8 - 6.4
	M4 - M5 - M6 - M8 - M10

R01-STD

Hand Riveter (New Generation)



For aluminium, steel and stainless steel rivets, interchangeable nose pieces

CODE NO		
R01-STD	2.4 - 3.2 - 4.0 - 4.8 mm	1

R02-280

Hand Riveter (Swivel Head)



For aluminium, steel and stainless steel rivets, 360° swiveling head, interchangeable nose pieces, aluminium body

CODE NO		
R02-280	2.4 - 3.2 - 4.0 - 4.8 mm	1

R15 Series

Magnetic Pick-Up Tools (Flexible Shaft)



For collecting metal parts from restricted areas, powerful rare earth magnet, flexible shaft, C-PLUS softgrip handle

CODE NO	g	mm	
R15-0500	680	510	6
R15-1000	1590	510	6
R15-1800	2270	510	6
R15-3000	3600	510	6

R15-TM10

Telescoping Magnetic Pick-Up Tool



For collecting metal parts from restricted areas, powerful rare earth magnet, telescoping shaft, metal clip

CODE NO	g	mm	
R15-TM10	1000	150-675	25

R15-HTM

Heavy Duty Telescoping Magnetic Pick-Up Tool



For collecting metal parts from restricted areas, powerful rare earth magnet, telescoping shaft, vinyl grip

CODE NO	g	mm	
R15-HTM	1600	425-680	12

R18S

Magnetic Tray (Rectangular)



StainlessSteel

For collection of metal parts, stainless steel, magnetic base

CODE NO	WxHxD mm	
R18S	240x140x40	1

R15-NTM

Telescoping Magnetic Pick-Up Tool (with Nozzle Adjuster)



For collecting metal parts from restricted areas, powerful rare earth magnet, includes a scribe useful for adjusting the nozzles of the washing system, telescoping shaft, metal clip

CODE NO	mm	
R15-NTM	150-675	25

R16-700

Magnetic Pick-Up and Claw Tool (Flexible Shaft)



Expandable/retractable claw and pickup magnet in one tool, claw control by handle, flexible shaft

CODE NO	g	mm	
R16-700	500	700	25

R20R

Telescoping Inspection Mirror (Round-L)



Steel base mounted mirror, flexible head, telescoping shaft (900 mm in extended position), stainless steel body

CODE NO	mm	mm	
R20R	50	250-900	25

R18R

Magnetic Tray (Round)



StainlessSteel

For collection of metal parts, stainless steel, magnetic base

CODE NO	mm	
R18R	150	1

R20RS

Telescoping Inspection Mirror (Round-M)



Steel base mounted mirror, flexible head, telescoping shaft (520 mm in extended position), metal clip

CODE NO	mm	mm	
R20RS	32	180-520	25

R20S

Telescoping Inspection Mirror (Square)



Steel base mounted mirror, flexible head, telescoping shaft (725 mm in extended position), stainless steel body

CODE NO	W x H mm	mm	
R20S	45x63	230-725	25

R20RP

Insulated Round Inspection Mirror



Steel base mounted mirror, fixed offset head, stainless steel body

CODE NO	mm	mm	
R20RP	30	175	12

R21P

Pull-Out Twin Magnifier (3X)



CODE NO	WxHxD mm	
R21P	66 x39x18	1


14 General Maintenance and Workshop Tools

R05 Series

Metallic Oil Cans (Metal Spout)



Metal spout, sheet steel body, powder coated finish

CODE NO	CC	
R05-200	200	12 •
R05-300	300	12 •
R05-500	500	12 •
R05-1000	1000	6 •


R08-500

Grease Gun (Hand Type-Metal Spout)

new
design



400 bar feed pressure, metal spout, sheet steel body, powder coated finish


CODE NO	CC	mm	
R08-500	500	300	1

R08-500SN

Spare Nozzle (for R08-500)



Four jaw steel connector, M10 x 1.0 mm female thread

CODE NO	mm	
R08-500SN	38	6 •

R08-FS Series

Spare Flexible Spouts (for R08-500)




R08-FSN - with nozzle



R08-FSY - without nozzle

High pressure reinforced rubber tube, M10 x 1.0 mm male threads


CODE NO	mm	
R08-FSN	330	6 •
R08-FSY	300	6 •

R25-P05

5 Piece Screw Extractor Set



For turning out worn/broken screws with left handed thread, Chrome Molybdenum steel

CODE NO	
R25-P05	6

5 PC: 7/64" (3-6 mm), 9/64" (6-8 mm), 5/32" (8-11 mm), 1/4" (11-14 mm), 19/64" (14-18 mm)

R26A-B05

5 Piece Screw Extractor Set - SAE



For turning out worn/broken screws with left handed thread, Chrome Molybdenum steel

CODE NO	
R26A-B05	1

5 PC: 1/8, 3/16, 15/64, 5/16, 3/8 inch

R26-M25

25 Piece Screw Extractor Kit




BOX WxHxD (mm)
245X129X40

Kit for turning out broken bolts and screws, HSS drill bits, special tool steel guides, pins and sleeves



Application:
M5, M6, M7, M8 (2 pc.), M9, M10, M11, M12, M14, M16 for bolts

CODE NO	
R26-M25	1


R30 Series

1/2" Drive Roller Stud Extractor Sockets



12.5
1/2"

For installing and removing stud bolts, roller type, unscrews both left and right hand threads

CODE NO	M	mm	
R30-06	M6	60	25
R30-08	M8	60	25
R30-10	M10	69	25
R30-12	M12	69	25

R30-R04

4 Piece 1/2" Drive Roller Stud Extractor Set



CODE NO	
R30-R04	6

4 PC: M6, M8, M10, M12



R32 Series

1/2" Bolt Extractor Sockets



Special sockets for removal of even extremely worn-out bolts, helix socket profile

10 3/8"

12.5 1/2"

8-19 mm

21-27 mm



YouTube Clip

CODE NO	mm	mm	
R32-08	8	27.5	12
R32-10	10	27.5	12
R32-11	11	27.5	12
R32-12	12	27.5	12
R32-13	13	27.5	12
R32-14	14	27.5	12
R32-15	15	27.5	12
R32-16	16	27.5	12
R32-17	17	27.5	12
R32-18	18	27.5	12
R32-19	19	27.5	12
R32-21	21	27.5	12
R32-22	22	27.5	12
R32-24	24	27.5	12
R32-27	27	27.5	12

R32-P11

11 Piece 1/2" Drive Bolt Extractor Socket Set



10 3/8"

CODE NO	
R32-P11	6



9 PC: R32 (8, 10, 11, 12, 13, 14, 16, 17, 19 mm)



Pim



BT/7020 3/8"x50 mm

R36-1

Straight Pick



StainlessSteel

CODE NO	mm	
R36-1	80	6 •

R36-2

Angle Pick



StainlessSteel

CODE NO	mm	
R36-2	80	6 •

R36-3

90° Pick



StainlessSteel

CODE NO	mm	
R36-3	80	6 •

R36-4

Hook Pick



StainlessSteel

CODE NO	mm	
R36-4	80	6 •

R36-B04

4 Piece Hook and Pick Set



StainlessSteel

CODE NO	
R36-B04	1



R36-1



R36-3



R36-2



R36-4

R37-25

Seal Scraper



CODE NO	mm	mm	
R37-25	25	150	6

CM-B0

Bottle Opener



CODE NO	mm	
CM-B0	145	12

R35DE

Engineer's Double End Scriber



CODE NO	mm	
R35DE	235	1

R35CT

Carbide Tipped Scriber



CODE NO	mm	
R35CT	145	20

R40-4

Steel Wire Brush (4 Row)



CODE NO	mm	
R40-4	275	12 •

R41-1

Steel Wire Brush



CODE NO	mm	
R41-1	245	12 •

15 Merchandisers

15 Merchandisers

202 | 205



SK10-1-54

54 Piece C-PLUS T-Handle Hexagon Key Display



CODE NO



SK10-1-54

1

54 PC: K10

2 mm x 6, 2.5 mm x 6, 3 mm x 6,
4 mm x 12, 5 mm x 12, 6 mm x 6, 8 mm x 6

SC22H-1-184

184 Piece 1/2" Drive 6-Point Socket Display



12.5
1/2"

CODE NO



SC22H-1-184

1

184 PC: C22H

10 mm x 13, 11 mm x 14, 12 mm x 14, 13 mm x 14,
14 mm x 14, 15 mm x 14, 16 mm x 13, 17 mm x 12,
18 mm x 12, 19 mm x 12, 21 mm x 11, 22 mm x 10,
24 mm x 9, 27 mm x 8, 30 mm x 7, 32 mm x 7

SF10-1-067

67 Piece C-PLUS Screwdriver Display



⦿ x36

⊕ x25

⊕ x6

CODE NO



SF10-1-067

1

⦿ F10 3.0x75 mm x 7,
4.0x100 mm x 6,
5.5x125 mm x 12,
6.5x150 mm x 6,
8.0x150 mm x 5

⊕ F14 PH0x60 mm x 7,
PH1x80 mm x 6,
PH2x100 mm x 12
⊕ F17 PZ2x100 mm x 6

SF10-1-067P

67 Piece C-PLUS Screwdriver Display



⦿ x36

⊕ x6

⊕ x25

CODE NO



SF10-1-067P

1

⦿ F10 3.0x75 mm x 7,
4.0x100 mm x 6,
5.5x125 mm x 12,
6.5x150 mm x 6,
8.0x150 mm x 5

⊕ F14 PH2x100 mm x 6
⊕ F17 PZ0x60 mm x 7,
PZ1x80 mm x 6,
PZ2x100 mm x 12

SF18-1-071

71 Piece C-PLUS Screwdriver Display



⦿ x71

CODE NO



SF18-1-071

1

⦿ F18
T5x60 mm x 7, T6x60 mm x 7, T7x60 mm x 7,
T8x60 mm x 7, T10x80 mm x 7, T15x80 mm x 6,
T20x100 mm x 6, T25x100 mm x 6, T27x115 mm x 6,
T30x115 mm x 6, T40x130 mm x 6



S4000M-1-067

67 Piece TOREX Screwdriver Display

- x36
- ⊕ x25
- ⊕ x6



CODE NO	
S4000M-1-067	1

- 4100M 3.0x75 mm x 7, 4.0x100 mm x 6, 5.5x125 mm x 12, 6.5x150 mm x 6, 8.0x150 mm x 5
- ⊕ 4200M PH0x60 mm x 7, PH1x80 mm x 6, PH2x100 mm x 12
- ⊕ 4300M PZ2x100 mm x 6

S4000M-1-067P

67 Piece TOREX Screwdriver Display

- x36
- ⊕ x6
- ⊕ x25



CODE NO	
S4000M-1-067P	1

- 4100M 3.0x75 mm x 7, 4.0x100 mm x 6, 5.5x125 mm x 12, 6.5x150 mm x 6, 8.0x150 mm x 5
- ⊕ 4200M PH2x100 mm x 6
- ⊕ 4300M PZ0x60 mm x 7, PZ1x80 mm x 6, PZ2x100 mm x 12

SCB-1-1008

1008 Piece Bit Merchandiser



1/4"

CODE NO	
SCB-1-1008	1

- 25 mm**
- CB/610 4.0, 5.5, 6.5 mm (48 each)
- CB/250 PH1, PH2, PH3 (48 each)
- CB/350 PZ1, PZ2, PZ3 (48'er ad.)
- CB/800 T10, T15, T20, T25, T30, T40 (48 each)
- 50 mm**
- CB/490 PH1, PH2, PH3 (48 each)
- CB/590 PZ1, PZ2, PZ3 (48 each)

SE11-1-040

40 Piece Pliers Display (DuoTech/Chrome Finish)



CODE NO	
SE11-1-040	1

- E01-11 160 mm, 180 mm, 200 mm (5 each)
- E06-11 140 mm, 160 mm (5 each)
- E15-11 160 mm, 200 mm (5 each)
- E16-11 200 mm (5 each)

SE41-1-040

40 Piece Pliers Display (DuoTech/Polished Finish)



CODE NO	
SE41-1-040	1

- E01-41 160 mm, 180 mm, 200 mm (5 each)
- E06-41 140 mm, 160 mm (5 each)
- E15-41 160 mm, 200 mm (5 each)
- E16-41 200 mm (5 each)

SE44-1-040

40 Piece Pliers Display (PVC Handle/Polished Finish)



CODE NO	
SE44-1-040	1


- E01-44 160 mm, 180 mm, 200 mm (5 each)
- E06-44 140 mm, 160 mm (5 each)
- E15-44 160 mm, 200 mm (5 each)
- E16-44 200 mm (5 each)

15 Merchandisers

SG01-1-067

67 Piece C-PLUS Insulated Screwdriver (VDE) Display

- x36
- ⊕ x25
- ⊕ x6




CODE NO	
SG01-1-067	1

- G01 3.0x100 mm x 7, 4.0x100 mm x 6, 5.5x125 mm x 12, 6.5x150 mm x 6, 8.0x175 mm x 5
- ⊕ G02 PH0x60 mm x 7, PH1x80 mm x 6, PH2x100 mm x 12
- ⊕ G03 PZ2x100 mm x 6

SG01-1-067P

67 Piece C-PLUS Insulated Screwdriver (VDE) Display

- x36
- ⊕ x6
- ⊕ x25



CODE NO	
SG01-1-067P	1

- G01 3.0x100 mm x 7, 4.0x100 mm x 6, 5.5x125 mm x 12, 6.5x150 mm x 6, 8.0x175 mm x 5
- G01 3.0x100 mm x 7, 4.0x100 mm x 6, 5.5x125 mm x 12, 6.5x150 mm x 6, 8.0x175 mm x 5

SG18-1-040

40 Piece Insulated Pliers (VDE) Display



CODE NO	
SG18-1-040	1

- G10-18 160 mm, 180 mm, 200 mm (5 each)
- G15-18 160 mm, 200 mm (5 each)
- G12-18 140 mm, 160 mm (5 each)
- G16-18 200 mm (5 each)

SH99-1-080

80 Piece Electronic Screwdriver Display

- x40
- ⊕ x30
- ⊕ x10



CODE NO	
SH99-1-080	1

- H01 1.5x40 mm x 10, 2.0x60 mm x 10, 2.5x80 mm x 10, 3.0x80 mm x 10
- ⊕ H02 PH0x60 mm x 10, PH0x60 mm x 10, PH1x80 mm x 10
- ⊕ H04 T6x40 mm x 10

SH20-1-040

40 Piece Electronic Pliers Display

new
content

StainlessSteel



CODE NO	
SH20-1-040	1

- H20-125SB 125 mm x 5
- H23F-130 130 mm x 5
- H20-125FL 125 mm x 5
- H25-155 155 mm x 5
- H20T-125SB 125 mm x 5
- H26-130 130 mm x 5
- H21-125SB 125 mm x 5
- H27-130 130 mm x 5

SJ72-1-60

60 Piece File Display



CODE NO	
SJ72-1-60	1

- J55.H 206H, 208H, 210H (150, 200, 250 mm) Second (6 each)
- J56.H 206H, 208H, 210H (150, 200, 250 mm) Second (6 each)
- J57.H 208H, 210H (200, 250 mm) Second (6 each)
- J58.H 208H (200 mm) Second (6 par ad.)
- J59.H 208H (200 mm) Second (6 each)

Discontinued Items

SP05 Series

P05 Tape Measure Merchandisers



CODE NO	
SP05-0316-180	1
SP05-0516-120	1
SP05-0519-120	1
SP05-0525-108	1
SP05-1025-072	1



SP05-0316-180
P05-0316 x 180



SP05-0516-120
P05-0516 x 120



SP05-0519-120
P05-0519 x 120



SP05-0525-108
P05-0525 x 108



SP05-1025-072
P05-1025 x 72

SP21-54

54 Piece Aluminum Spirit Level Merchandiser



CODE NO	
SP21-54	1

54 PC: P21 30 cm x 6, 40 cm x 6, 50 cm x 6,
60 cm x 12, 70 cm x 6, 80 cm x 12, 100 cm x 6

DISCONTINUED	SUBSTITUTE	PAGE NO
B05-E12	B05-E10	31
B06-E12	B06-E10	31
N23-E05	N23-E06	37
N30-E05	N30-E04	30
A50BR-84	A50BR-83	47
A50BR-84A01M	A50BR-83A01M	47
A50BR-84A01	A50BR-83A01	47
B01AS-00732B	B01A-00732	51
B09-1012	Cancelled	-
B09-1214	Cancelled	-
B09-1417	Cancelled	-
B09A-0810	Cancelled	-
B27T-06B	Cancelled	-
B27T-08B	B27-1B	55
B27T-10B	Cancelled	-
B27T-14B	Cancelled	-
LT27/800CP	LT30/900CP	61
LT27/900CP	LT30/900CP	61
CO2A-S0104	CO2A-B0104	63
CO2A-S0932	CO2A-B0932	63
CO2A-S0516	CO2A-B0516	63
C11-60S	Cancelled	-
C10-15PG1	Cancelled	-
C2A-B06/2	Cancelled	-
C21-60S	Cancelled	-
C32A-B27	Cancelled	-
C62-B24	Cancelled	-
C62-B32	C64-B32	86
C62-B34	C64-B34	86
C62-B36	C64-B36	86
BT/8008QR	BT/8008	79
D03F2-0125	D02F2-0125	89
D03F2-1112	D02F2-1110	89
D03F2-2122	D02F2-2110	89
D03F2-2133	D02F2-2130	89
D06-31	Cancelled	-
F22-100-150	Cancelled	-
CB/690	CB/620	105
CB4/EST28	CB4/EST36	107
CB4/ST49	CB4/ST51	107
8000/PH3	Cancelled	-
CB/1835	Cancelled	-
BTA/010442	Cancelled	-
BTD/08	BT/0865	106
BTD/10	BT/1065	106
BTD/13	BT/1365	106
CB/516X206	CB/3008G	109
F26/BR	F26/BR1	111
F26/BR3	F26/BR1	111
F26/AG	F26/AD1	111
F26/AG-2	F26/AD1	111
E19D-200	Cancelled	-
E55-16-0290	E55-280-2	120
E69-ESHX1	E69-ESHX1	123
6105	G09-VT30	129
6106	G09-VT35	129
G25-58-0250	G25-18-0200	-
G30-58-0170	G30-18-0170	131
G30-58-0200	G30-18-0200	131
GB14-15	GB09-15	132
GB14-16	GB09-16	132
GB14-18	GB09-18	132
G90-IR550	G90-IR500	138

DISCONTINUED	SUBSTITUTE	PAGE NO
H30S-110FL	H20-125FL	140
H33F-120	H23F-130	140
H36-120	H26-130	140
H37-120	H27-130	140
H30-W04	H20-W04	141
I06-10-2	I01-15	147
I06-14-2	I01-20	147
I06-24-2	Cancelled	-
I11-40	I12-40	147
I11-60	Cancelled	-
I11-40R	Cancelled	-
I11-60R	Cancelled	-
I50	Cancelled	-
L01-H1500	Cancelled	-
L01-H2000	Cancelled	-
L07F-16	Cancelled	-
L12-30	L12-30-2	160
L12-40	L12-40-2	160
L12-50	L12-50-2	160
L12-R30	Cancelled	-
L12-R40	Cancelled	-
L12-R50S	Cancelled	-
L40P-25	Cancelled	-
L50-W6-2	L50-B4-2	162
L20-120	Cancelled	-
N14-0452	N14-042	167
N15-TIPE	Cancelled	-
N15-TZUNI	Cancelled	-
N15-K1VAG	Cancelled	-
N15-K2VAG.U	Cancelled	-
N15-K4VAG	Cancelled	-
N15-M1VAG	Cancelled	-
N15-K1FIA	Cancelled	-
N15-K3FIA	Cancelled	-
N15-K3BMW	Cancelled	-
N15-K3REN	Cancelled	-
N16-0101	Cancelled	-
N16-06	Cancelled	-
N22-0202	Cancelled	-
N22-01K05	Cancelled	-
N33-04R	N33-04R1	178
N33-04R1C	N33-04R1	178
N33-04R2C	N33-04R2	178
N33-04R1D	Cancelled	-
N33-04R2D	Cancelled	-
N33-04R3D	Cancelled	-
N43-1020	Cancelled	-
29110	P07TT-10	183
29120	P07TT-20	183
29100D	Cancelled	-
R.P7	R.P5R	194
P20R	Cancelled	-
R09B-125	R09F-125	197
R09B-150	R09F-150	197
R09B-200	R09F-175	197
R21-P19	Cancelled	-

■ SUBSTITUTE ITEMS ■ RECOMMENDED ITEMS

NEW CODES FOR EXISTING PRODUCTS		
EX CODE	NEW CODE	PAGE NO
N33-04R	N33-04R1	178

INDEX

ARTICLE CODE	PAGE NUMBER	ARTICLE CODE	PAGE NUMBER	ARTICLE CODE	PAGE NUMBER	ARTICLE CODE	PAGE NUMBER	ARTICLE CODE	PAGE NUMBER	ARTICLE CODE	PAGE NUMBER
705	59	90564	59	4200/64M	96	740L	59	A12-20D6	14	A50M-43A25	20
706	59	90732	59	4200/66M	96	740TL	60	A17D-G	14	A50M-43A27	20
707	59	90764	59	4200/84M	96	745L	59	A17D-GP	14	A50M-43A32	20
708	59	90964	59	4200/TP1M	96	8000Q/M15	98	A17D-S	14	A50M-43A32H	20
709	59	1300M/SST1	97	4200/TP2M	96	8002QH	98	A17D-SP	14	A50M-80PH4	20
710	59	1300M-E501	35	4300/30M	96	8101Q	98	A17D-W	14	A50M-98A07	19
715	59	1304M	96	4300/51M	96	8102Q	98	A17D-WP	14	A50MB-319	44
720	59	1305M	96	4300/62M	96	8246Q	98	A17H-D50	15	A50MB-319A01	44
725	59	1306M	96	4300/84M	96	8312Q	98	A17H-S25	15	A50MB-319A01M	44
727	59	1307M	96	4300/TP1M	96	8412Q	98	A17H-S50	15	A50MC-291	48
730	59	1308M	96	4300/TP2M	96	8515Q	98	A17L-NG	14	A50MC-291A01	48
740	59	1309M	96	4400/T10M	96	8525Q	98	A17L-NS	14	A50MC-291A01M	48
745	59	1310M	96	4400/T15M	96	A		A17L-NW	14	A50PSA-328	45
750	59	1311M	96	4400/T20M	96	A01-05CNC	13	A20-100	15	A50PSA-328A01	45
802	57	1312M	96	4400/T25M	96	A01-06	12	A20-110SH	15	A50PSA-328A01M	45
803	57	1313M	96	4400/T27M	96	A01-06W	12	A20-170	15	A50TK-121	38
804	57	1314M	96	4400/T30M	96	A01-06WW	12	A20-200SH	15	A50TK-121A01	38
805	57	1355M	96	4400/T40M	96	A01-07	12	A25-5	17	A50TK-121A02	38
806	57	3100/BT1	110	4400M/6ST1	97	A01-07J	12	A25-5L	17	A50TK-123	38
807	57	3100/BT6A	111	4400M-E701	35	A01-08	12	A26-BP01	18	A50TK-123A01	38
808	57	3100/TF2	98	6105CP	129	A01-08J	12	A26-ET01	18	A50TK-123A02	38
810	57	4000M/4ST4	96	6106CP	129	A01-11	12	A26-IT01	18	A50TK-164	39
812	57	4000M/5ST1	96	6106EX	129	A01-11W	12	A26-PB01	18	A50TK-164A01	39
814	57	4000M/5ST3	96	705L	59	A01M-06	12	A26-TB12	18	A50TK-164A02	39
815	57	4000M/6ST1	97	706L	59	A01M-06L	12	A26-TB19	18	A50TK-230	40
817	57	4000M/6ST2	97	707L	59	A01M-07	12	A27-16PL	17	A50TK-230A01	40
819	57	4000M/7ST1	97	708L	59	A01M-07J	12	A27-19PL	17	A50TK-230A01M	40
825	57	4000M/7ST2	97	709B	60	A01M-07JL	12	A27-22PL	17	A50TK-230A02	40
835	57	4000M/9ST1	97	709IPR	60	A01M-07L	12	A27J-28	18	A50TK-232/1	39
902	57	4000M-E701	35	709L	59	A01M-08	12	A32	18	A50TK-232/1A01	39
903	57	4100/107M	96	709TL	60	A01M-08J	12	A32/T	18	A50TK-232/1A01M	39
904	57	4100/21M	96	710B	60	A01M-08JL	12	A32H	18	A50TK-232/1A02	39
905	57	4100/31M	96	710IPR	60	A01M-08L	12	A32H-XL	18	A50TK-232/2	40
906	57	4100/32M	96	710L	59	A01M-CH	15	A32-XL	18	A50TK-232/2A01	40
907	57	4100/35M	96	710TL	60	A01M-DH	16	A50AS-159A07	19	A50TK-232/2A01M	40
908	57	4100/41M	96	715B	60	A01M-LD	15	A50AS-197	42	A50TK-232/2A02	40
910	57	4100/42M	96	715IPR	60	A01M-PR	15	A50AS-197A01	42	A50TK-275	41
912	57	4100/43M	96	715L	59	A01-PL	15	A50AS-197A01M	42	A50TK-275A01	41
915	57	4100/44M	96	715TL	60	A01-PM	15	A50BMW-321	44	A50TK-275A01M	41
925	57	4100/52M	96	720B	60	A01-PM/J	16	A50BMW-321A01	44	A50TK-343	41
935	57	4100/53M	96	720IPR	60	A01-PM/S	16	A50BMW-321A01M	44	A50TK-343A01	41
80050	58	4100/54M	96	720L	59	A01-PM/W	16	A50BR-153	47	A50TK-343A01M	41
80104	58	4100/56M	96	720TL	60	A01-PM/XL	16	A50BR-153A01	47	A50VW-292	43
80108	58	4100/62M	96	725B	60	A01-PS	15	A50BR-153A01M	47	A50VW-292A01	43
80116	58	4100/63M	96	725IPR	60	A01-SCL	13	A50BR-83	47	A50VW-292A01M	43
80308	58	4100/64M	96	725L	59	A01-SCM	13	A50BR-83A01	47	AE00	37
80316	58	4100/66M	96	725TL	60	A02-04	13	A50BR-83A01M	47	A-SH	16
80332	58	4100/74M	96	727B	60	A02-05	13	A50CR-293	42	A-SL	16
80516	58	4100/75M	96	727IPR	60	A02-06	13	A50CR-293A01	42	A-STR-4045	16
80532	58	4100/86M	96	727L	59	A03-CNC1	13	A50CR-293A01M	42	A-SW100	16
80564	58	4100/87M	96	727TL	60	A03-ID	13	A50CR-350	43	A-SW100F	16
80732	58	4100/TP40M	96	730B	60	A03-SD	13	A50CR-350A01	43	A-SW100S	16
80764	58	4100/TP55M	96	730IPR	60	A06-04	17	A50CR-350A01M	43	A-SW100SB	16
80964	58	4100/TP65M	96	730L	59	A06-04JS	17	A50EV-132	46	A-SW125	16
90050	59	4200/106M	96	730TL	60	A06-08JX	17	A50EV-132A01	46	A-SW125F	16
90104	59	4200/30M	96	740/M05	60	A06-CT	17	A50EV-132A01M	46	A-SW125S	16
90108	59	4200/31M	96	740/M06	60	A07-02	17	A50FRD-344	45	A-SW125SB	16
90116	59	4200/51M	96	740/M08	60	A07-03	17	A50FRD-344A01	45	A-SWJ-01M	16
90308	59	4200/52M	96	740/M10	60	A07-0301	17	A50FRD-344A01M	45	A-SWS-01M	16
90316	59	4200/53M	96	740/M12	60	A10-4D10	14	A50HCV-358	46	B	
90332	59	4200/56M	96	740/M14	60	A10-6D10	14	A50HCV-358A01	46	B01-05/2	50
90516	59	4200/62M	96	740B	60	A12-15D0	14	A50HCV-358A01M	46	B01-06	50
90532	59	4200/63M	96	740IPR	60	A12-20CNC1	13	A50M-43	20	B01-07	50

INDEX

ARTICLE CODE	PAGE NUMBER	ARTICLE CODE	PAGE NUMBER	ARTICLE CODE	PAGE NUMBER	ARTICLE CODE	PAGE NUMBER	ARTICLE CODE	PAGE NUMBER		
B01-08	50	B01-B21	50	B06-14	51	B09-B06	53	B14-B06	54	B24-46	55
B01-09	50	B01-B25	50	B06-15	51	B09-B08	53	B14-B08	54	B24-50	55
B01-10	50	B01-E12	31	B06-16	51	B09-B10	53	B14-B10/2	54	B24-55	55
B01-11	50	B01-E16	31	B06-17	51	B09-B10/2	53	B14-B12	54	B24-60	55
B01-12	50	B01-E21/2	23	B06-18	51	B09-B12	53	B14-E08	31	B24-65	55
B01-13	50	B01-P12	50	B06-19	51	B09-E08	31	B14-R08	54	B24-70	55
B01-14	50	B01-R12	50	B06-E10	31	B09-E12	31	B14-R12	54	B24-75	55
B01-15	50	B01-R13	50	B06-R05	51	B09-P12	53	B17-0608	54	B24-80	55
B01-16	50	B01-R21	50	B06-R10	51	B09-R08	52	B17-1012	54	B27-1B	55
B01-17	50	B05-08	51	B06-R12	51	B09-R12	52	B17-1418	54	B27-2022	55
B01-18	50	B05-09	51	B07A-0102	52	B09SA-0102	53	B17-2024	54	B27-2123	55
B01-19	50	B05-10	51	B07A-0203	52	B09SA-0104	53	B17-B04	54	B27-2224	55
B01-20	50	B05-11	51	B07A-0304	52	B09SA-0308	53	B17-E18	31	B27-2426	55
B01-21	50	B05-12	51	B07A-0506	52	B09SA-0516	53	B19-0810	54	B27-2427	55
B01-22	50	B05-12S	52	B07A-B04	52	B09SA-0716	53	B19-0911	54	B27-2528	55
B01-23	50	B05-13	51	B07AO-0102	52	B09SA-0732	53	B19-1011	54	B27-2B	55
B01-24	50	B05-14	51	B07AO-0203	52	B09SA-0916	53	B19-1113	54	B27-3032	55
B01-25	50	B05-14B	52	B07AO-0304	52	B09SA-0932	53	B19-1214	54	B27T-0607	55
B01-26	50	B05-14S	52	B07AO-0506	52	B09SA-1132	53	B19-1719	54	B27T-0809	55
B01-27	50	B05-15	51	B07AO-B04	52	B09SA-1564	53	B19-1922	54	B27T-1011	55
B01-28	50	B05-16	51	B07-B01	51	B09SA-R09	53	B19-2427	54	B27T-1213	55
B01-30	50	B05-17	51	B09-0555	52	B10-0607	53	B19-B06	54	B27T-12B	55
B01-32	50	B05-18	51	B09-0607	52	B10-0809	53	B19-E06	32	B27T-1415	55
B01-34	50	B05-19	51	B09-0809	52	B10-1011	53	B20-1012	54	B27T-1617	55
B01-36	50	B05-21	51	B09-0810	52	B10-1013	53	B20-1113	54	B27T-1819	55
B01-38	50	B05-22	51	B09-1011	52	B10-1213	53	B20-1315	54	B27T-2022	55
B01-41	50	B05-24	51	B09-1013	52	B10-1317	53	B20-1317	54	B27T-2123	55
B01-46	50	B05-27	51	B09-1213	52	B10-1415	53	B20-1417	54	B27T-2426	55
B01-50	50	B05-30	51	B09-1317	52	B10-1617	53	B20-1922	54	B27T-2528	55
B01A-00102	51	B05-32	51	B09-1415	52	B10-1719	53	B21-150B	55	B27T-3032	55
B01A-00104	51	B05-36	51	B09-1617	52	B10-1819	53	B21-150C	55	B27T-B08	55
B01A-00304	51	B05-38S	52	B09-1719	52	B10-1922	53	B21-200B	55	B27T-B12	55
B01A-00308	51	B05AR-0102	52	B09-1819	52	B10-2022	53	B21-200C	55	B28-06	56
B01A-00508	51	B05AR-0104	52	B09-1922	52	B10-2123	53	B21-250B	55	B28-07	56
B01A-00516	51	B05AR-0304	52	B09-2022	52	B10-2224	53	B21-250C	55	B28-08	56
B01A-00708	51	B05AR-0308	52	B09-2123	52	B10-2426	53	B21-300B	55	B28-09	56
B01A-00716	51	B05AR-0508	52	B09-2224	52	B10-2427	53	B21-300C	55	B28-10	56
B01A-00732	51	B05AR-0516	52	B09-2426	52	B10-2528	53	B21-375B	55	B28-11	56
B01A-00916	51	B05AR-0716	52	B09-2427	52	B10-2732	53	B21-375C	55	B28-12	56
B01A-00932	51	B05AR-0732	52	B09-2528	52	B10-3032	53	B21W-150B	55	B28-13	56
B01A-01116	51	B05AR-0916	52	B09-2732	52	B10-B06	53	B21W-200B	55	B28-14	56
B01A-01132	51	B05AR-0932	52	B09-3032	52	B10-B08	53	B21W-250B	55	B28-15	56
B01A-01316	51	B05AR-1116	52	B09-3236	52	B10-B10	53	B21W-300B	55	B28-16	56
B01A-01516	51	B05AR-1132	52	B09-3336	52	B10-B10/2	53	B23-24	55	B28-17	56
B01A-10000	51	B05-E10	31	B09-3641	52	B10-B12	53	B23-27	55	B28-18	56
B01A-10102	51	B05-P12	51	B09-4146	52	B10-E08	31	B23-30	55	B28-19	56
B01A-10104	51	B05-R05	51	B09-4650	52	B10-E12	31	B23-32	55	B28-22	56
B01A-10108	51	B05R-09	51	B09A-0102	53	B10-P12	53	B23-36	55	B28-B08	56
B01A-10116	51	B05-R10	51	B09A-0203	53	B10-R08	53	B23-41	55	B28-E08	32
B01A-10308	51	B05R-11	51	B09A-0304	53	B10-R12	53	B23-46	55	B30-0810	56
B01A-10316	51	B05R-12	51	B09A-0405	53	B14-0607	54	B23-50	55	B30-1011	56
B01A-E14	31	B05-R12	51	B09A-0506	53	B14-0809	54	B23-55	55	B30-1213	56
B01A-R09	51	B05R-14	51	B09A-0607	53	B14-1011	54	B23-60	55	B30-1415	56
B01A-R14	51	B05R-15	51	B09A-0708	53	B14-1213	54	B23-65	55	B30-1617	56
B01A-R16	51	B05R-16	51	B09A-0709	53	B14-1415	54	B23-70	55	B30-1819	56
B01AS-00108	50	B05R-18	51	B09A-0809	53	B14-1617	54	B23-75	55	B32-06	56
B01AS-00316	50	B05-S04	52	B09A-0911	53	B14-1819	54	B23-80	55	B32-07	56
B01AS-00532	50	B06-08	51	B09A-1011	53	B14-2022	54	B24-24	55	B32-08	56
B01AS-00732	50	B06-09	51	B09A-1213	53	B14-2123	54	B24-27	55	B32-09	56
B01-B08	50	B06-10	51	B09A-1315	53	B14-2426	54	B24-30	55	B32-10	56
B01-B12	50	B06-11	51	B09A-1415	53	B14-2427	54	B24-32	55	B32-11	56
B01-B12/2	50	B06-12	51	B09A-1417	53	B14-2528	54	B24-36	55	B32-12	56
B01-B17	50	B06-13	51	B09A-R10	53	B14-3032	54	B24-41	55	B32-13	56

INDEX

ARTICLE CODE	PAGE NUMBER	ARTICLE CODE	PAGE NUMBER	ARTICLE CODE	PAGE NUMBER	ARTICLE CODE	PAGE NUMBER	ARTICLE CODE	PAGE NUMBER	ARTICLE CODE	PAGE NUMBER
B32-14	56	BT/8001QR	100	C01-C	68	C04-B10	64	C08S-T07	65	C12A-B1000	70
B32-15	56	BT/8003	73	C01-HLOK	66	C04-B13	64	C08S-T08	65	C12A-B1116	70
B32-16	56	BT/8003QR	100	C01-T90	66	C04-H040	63	C08S-T09	65	C12A-B1316	70
B32-16S	166	BT/8004	73	C01-T90L	66	C04-H045	63	C08S-T10	65	C12A-B1516	70
B32-17	56	BT/8005	73	C01-T90LR	67	C04-H050	63	C08S-T15	65	C12A-RB13	70
B32-18	56	BT/8006	79	C01-T90R	67	C04-H055	63	C08S-T20	65	C12A-S0102	70
B32-19	56	BT/8006QR	100	C02A-B0102	63	C04-H060	63	C08S-T25	65	C12A-S0308	70
B32-21S	166	BT/8007	79	C02A-B0104	63	C04-H070	63	C08S-T27	65	C12A-S0508	70
B99A-E26	23	BT/8008	79	C02A-B0308	63	C04-H080	63	C08S-T30	65	C12A-S0716	70
B99A-E31	23	BT/ST061	106	C02A-B0316	63	C04-H090	63	C08S-T40	65	C12A-S0916	70
B99-E20	31	BTA/010245	106	C02A-B0516	63	C04-H100	63	C08S-TR08	65	C12A-S1532	70
B99-E24	23	BTA/051642	106	C02A-B0716	63	C04-H110	63	C08S-TR09	65	C12A-S1932	70
B99-E241	23	C		C02A-B0732	63	C04-H120	63	C08S-TR10	65	C12-H06	70
B99-E32	23	C00-15RH4	68	C02A-B0916	63	C04-H130	63	C08S-TR15	65	C12-H07	70
B99-E37	21	C00-18PH2	69	C02A-B0932	63	C04-H140	63	C08S-TR20	65	C12-H08	70
B99-E41	21	C00-25RH4	68	C02A-B1132	63	C04-RH08	64	C08S-TR25	65	C12-H09	70
BC-E08	23	C00-27PH5	68	C02A-H0108	63	C06-04	64	C08S-TR27	65	C12-H10	70
BC-E081	23	C00-46PH2	69	C02A-H0316	63	C06-05	64	C08S-TR30	65	C12-H11	70
BC-E25	23	C00-61PH2	69	C02A-H0532	63	C06-06	64	C08S-TR40	65	C12-H12	70
BC-E40	24	C00A-15PBT	69	C02A-RB10	63	C06-07	64	C10-18PH4	74	C12-H13	70
BT/01DUO	110	C00A-60PM2	69	C02A-S0308	63	C06-08	64	C10-20PH2	74	C12-H14	70
BT/01QH	110	C00A-E15BT	33	C02A-S0316	63	C06-10	64	C10-60PH2	74	C12-H15	70
BT/01SL2	110	C00A-E25BT	33	C02A-S0716	63	C06-R06	64	C10A-17PBT	74	C12-H16	70
BT/01TM	99	C00A-E39BT	33	C02A-S0732	63	C08AS-H0104	65	C10A-41PM2	74	C12-H17	70
BT/01XF	111	C00C-E45BHT	33	C02A-S1132	63	C08AS-H0108	65	C10A-E17BT	33	C12-H18	70
BT/02	110	C00-E26H2	32	C02-H040	63	C08AS-H0116	65	C10A-E30BT	33	C12-H19	70
BT/02TM	99	C00-E52H2	32	C02-H045	63	C08AS-H0316	65	C10-E18H2	33	C12-H20	70
BT/03	110	C01-11	66	C02-H050	63	C08AS-H0332	65	C11-11	72	C12-H21	70
BT/05	110	C01-11R	67	C02-H055	63	C08AS-H0516	65	C11-11R	72	C12-H22	70
BT/0642	106	C01-12	66	C02-H060	63	C08AS-H0532	65	C11-12	72	C12-RH10	70
BT/0665	106	C01-12R	67	C02-H070	63	C08AS-H0564	65	C11-12R	72	C12U-RB10	71
BT/0680	106	C01-14N	66	C02-H080	63	C08AS-H0732	65	C11-14N	72	C14A-B0102	70
BT/0742	106	C01-14NR	67	C02-H090	63	C08AS-H0764	65	C11-14NR	72	C14A-B0104	70
BT/0765	106	C01-15	66	C02-H100	63	C08AS-H0964	65	C11-20	72	C14A-B0304	70
BT/0780	106	C01-20	67	C02-H110	63	C08AS-RHX11	65	C11-20S	72	C14A-B0308	70
BT/08	110	C01-20F	67	C02-H120	63	C08S-H25	65	C11-36MR	72	C14A-B0508	70
BT/0842	106	C01-20S	67	C02-H130	63	C08S-H30	65	C11-40	72	C14A-B0516	70
BT/0865	106	C012-16	68	C02-H140	63	C08S-H40	65	C11-50MR	72	C14A-B0708	70
BT/0865TM	99	C012-16	73	C02-H150	63	C08S-H50	65	C11-60	72	C14A-B0716	70
BT/0880	106	C012-16	79	C02-RH13	63	C08S-H60	65	C11-72	73	C14A-B0916	70
BT/1045	106	C012-19	68	C02UA-0102	64	C08S-H70	65	C11-72W	73	C14A-B1000	70
BT/1065	106	C012-19	73	C02UA-0104	64	C08S-H80	65	C11-75	73	C14A-B1116	70
BT/1065TM	99	C012-19	79	C02UA-0308	64	C08S-IPR10	65	C11-75W	73	C14A-B1316	70
BT/1080	106	C012-26	68	C02UA-0516	64	C08S-IPR15	65	C11-76F	73	C14A-B1516	70
BT/1165	106	C012-26	73	C02UA-0716	64	C08S-IPR20	65	C11-77	73	C14A-RB13	70
BT/1265	106	C012-26	79	C02UA-0732	64	C08S-IPR25	65	C11-78	73	C14-H08	70
BT/1365	106	C012-34	68	C02UA-0916	64	C08S-IPR27	65	C11-79	73	C14-H09	70
BT/1365TM	99	C012-34	73	C02UA-0932	64	C08S-IPR30	65	C11-80	73	C14-H10	70
BT/1380	106	C012-34	79	C02UA-1132	64	C08S-IPR40	65	C11-91	73	C14-H11	70
BT/1465	106	C01-35MR	67	C02UA-RB09	64	C08S-PH1	64	C11-92	73	C14-H12	70
BT/1765	106	C01-40	67	C04-10PH0	69	C08S-PH2	64	C11-92S	73	C14-H13	70
BT/1780	106	C01-50MR	67	C04A-B0102	64	C08S-PH3	64	C11-C	73	C14-H14	70
BT/7000S3	109	C01-60	67	C04A-B0104	64	C08S-PZ1	64	C11-T90	72	C14-H15	70
BT/7000TMS3	99	C01-71	68	C04A-B0308	64	C08S-PZ2	64	C11-T90R	72	C14-H16	70
BT/7010	109	C01-72	68	C04A-B0316	64	C08S-PZ3	64	C12A-B0102	70	C14-H17	70
BT/7015	109	C01-73	68	C04A-B0516	64	C08S-RHX7	65	C12A-B0104	70	C14-H18	70
BT/7017M	109	C01-73W	68	C04A-B0716	64	C08S-RTP7	65	C12A-B0304	70	C14-H19	70
BT/7018	109	C01-75	68	C04A-B0732	64	C08S-RTR7	65	C12A-B0308	70	C14-RB10	70
BT/7020	109	C01-75F	68	C04A-B0916	64	C08S-RTX7	65	C12A-B0508	70	C14-RH10	70
BT/7027	109	C01-77	68	C04A-B0932	64	C08S-S40	64	C12A-B0516	70	C15-RH10	71
BT/7028	109	C01-78	68	C04A-B1132	64	C08S-S55	64	C12A-B0708	70	C16-04	71
BT/7030	109	C01-80	68	C04A-RB10	64	C08S-S65	64	C12A-B0716	70	C16-05	71
BT/8001	68	C01-92	68	C04-B08	64	C08S-T06	64	C12A-B0916	70	C16-06	71

INDEX

ARTICLE CODE	PAGE NUMBER	ARTICLE CODE	PAGE NUMBER	ARTICLE CODE	PAGE NUMBER	ARTICLE CODE	PAGE NUMBER	ARTICLE CODE	PAGE NUMBER		
C16-07	71	C21-39MR	78	C22-H10	74	C26-10	75	C28S-R14L	77	C32A-B13	83
C16-08	71	C21-40	79	C22-H11	74	C26-11	75	C28S-RH9	76	C32A-B14	83
C16-10	71	C21-40L	79	C22-H12	74	C26-12	75	C28S-RR6L	77	C32A-B15	83
C16-11	71	C21-50	79	C22-H13	74	C26-14	75	C28S-RT9	76	C32A-B17	83
C16-12	71	C21-60	79	C22-H14	74	C26-16	75	C28S-RX5L	77	C32-B22	83
C16-14	71	C21-71W	79	C22-H15	74	C26-18	75	C28S-RX6	77	C32-B24	83
C16-16	71	C21-72	79	C22-H16	74	C26-20	75	C28-SS40	78	C32-B27	83
C16-18	71	C21-74	79	C22-H17	74	C26-22	75	C28-SSE40	34	C32-B30	83
C16-20	71	C21-74W	79	C22-H18	74	C26-24	75	C28S-T20	76	C32-B32	83
C16D-08	71	C21-77	79	C22-H19	74	C26-R08	75	C28S-T20L	76	C32-B36	83
C16D-10	71	C21-77W	79	C22-H20	74	C27-R16	166	C28S-T25	76	C32-B38	83
C16D-12	71	C21-79W	79	C22-H21	74	C27-R16M	166	C28S-T25L	76	C32-B41	83
C16D-14	71	C21-80	79	C22-H22	74	C27-R21	166	C28S-T27	76	C32-B46	83
C16-R10	71	C21-90KIT15	80	C22-H23	74	C27-R21M	166	C28S-T27L	76	C32-B50	83
C17-R14C	166	C21-90KIT6	80	C22-H24	74	C28AS-H0102	77	C28S-T30	76	C32-H19	83
C17-R14CF	166	C21-91	79	C22-H25	74	C28AS-H0104	77	C28S-T30L	76	C32-H21	83
C17-R14ML	166	C21-91S	79	C22-H26	74	C28AS-H0308	77	C28S-T35	76	C32-H22	83
C17-R16	166	C21-92	79	C22-H27	74	C28AS-H0316	77	C28S-T35L	76	C32-H24	83
C17-R18	166	C21-C	79	C22-H28	74	C28AS-H0508	77	C28S-T40	76	C32-H27	83
C17-R21	166	C21-T90	78	C22-H28	74	C28AS-H0516	77	C28S-T40L	76	C32-H30	83
C18S-H03	71	C21-T90R	78	C22-H29	74	C28AS-H0532	77	C28S-T45	76	C32-H32	83
C18S-H04	71	C22A-B03	75	C22-H30	74	C28AS-H0532	77	C28S-T45L	76	C32-H33	83
C18S-H05	71	C22A-B04	75	C22-H32	74	C28AS-H0732	77	C28S-T50	76	C32-H34	83
C18S-H06	71	C22A-B05	75	C22-RB11	75	C28AS-H0916	77	C28S-T50L	76	C32-H36	83
C18S-H07	71	C22A-B06	75	C22-RH11	75	C28AS-H0916	77	C28S-T55	76	C32-H38	83
C18S-H08	71	C22A-B07	75	C24-B08	75	C28S-17PTH	78	C28S-T55L	76	C32-H41	83
C18S-H09	71	C22A-B08	75	C24-B10	75	C28S-E14H	33	C28S-T60	76	C32-H46	83
C18S-H10	71	C22A-B08	75	C24-B11	75	C28S-E29	34	C28S-T60L	76	C32-H50	83
C18S-H10	71	C22A-B09	75	C24-B12	75	C28S-E32M	34	C28S-T70	76	C32-H55	83
C18S-RH08	71	C22A-B10	75	C24-B13	75	C28S-H04	76	C28S-T70L	76	C32-H60	83
C18S-RT09	71	C22A-B11	75	C24-B14	75	C28S-H05	76	C28S-TR30	76	C38S-H14	83
C18S-T10	71	C22A-B12	75	C24-B15	75	C28S-H05L	76	C28S-TR30XL	76	C38S-H17	83
C18S-T15	71	C22A-B13	75	C24-B16	75	C28S-H06	76	C28S-TR40	76	C38S-H19	83
C18S-T20	71	C22A-B14	75	C24-B17	75	C28S-H06L	76	C28S-TR45	76	C38S-H22	83
C18S-T25	71	C22A-B15	75	C24-B18	75	C28S-H06XL	76	C28S-TR50	76	C40-15MB2	84
C18S-T27	71	C22A-B16	75	C24-B19	75	C28S-H06XL2	76	C28S-TR55	76	C41-12	84
C18S-T30	71	C22A-B17	75	C24-B20	75	C28S-H07	76	C28S-X05	77	C41-12/H	84
C18S-T40	71	C22A-RB11	75	C24-B21	75	C28S-H07L	76	C28S-X06	77	C41-12/T	84
C18S-T45	71	C22-B08	74	C24-B22	75	C28S-H08	76	C28S-X06L	77	C41-12R	84
C18S-T50	71	C22-B09	74	C24-B24	75	C28S-H08L	76	C28S-X08	77	C41-40	84
C18S-T55	71	C22-B10	74	C24-B27	75	C28S-H09	76	C28S-X08L	77	C41-40R	84
C20-180PH2	82	C22-B11	74	C24-B30	75	C28S-H09L	76	C28S-X10	77	C41-76	84
C20-18PH2	80	C22-B12	74	C24-B32	75	C28S-H10	76	C28S-X10L	77	C41-78	84
C20-18PTX	78	C22-B13	74	C24-E13H	33	C28S-H10L	76	C28S-X10XL	77	C41-91	84
C20-23PH4	80	C22-B14	74	C24-H08	75	C28S-H10XL	76	C28S-X12	77	C42-B32	84
C20-25PB2	80	C22-B15	74	C24-H10	75	C28S-H11L	76	C28S-X12L	77	C42-B36	84
C20-25PH2	80	C22-B16	74	C24-H11	75	C28S-H12	76	C28S-X12XL	77	C42-B41	84
C20-35PH4	81	C22-B17	74	C24-H12	75	C28S-H12L	76	C28S-X14	77	C42-B46	84
C20-49PH2	81	C22-B18	74	C24-H13	75	C28S-H12XL	76	C28S-X14L	77	C42-B50	84
C20-56PH2	81	C22-B19	74	C24-H14	75	C28S-H13L	76	C28S-X16	77	C42-B55	84
C20-96PH2	82	C22-B20	74	C24-H15	75	C28S-H14	76	C30-14MB2	84	C42-B60	84
C20A-20PBT	81	C22-B21	74	C24-H16	75	C28S-H14L	76	C30-14MH2	84	C42-B65	84
C20A-34PM2	81	C22-B22	74	C24-H17	75	C28S-H17	76	C30-E26HM2	21	C42-B70	84
C20A-E20BT	34	C22-B23	74	C24-H18	75	C28S-H19	76	C31-12-2	83	C42-B75	84
C20-E23H2	34	C22-B24	74	C24-H19	75	C28S-HB05XL	77	C31-12-2R	83	C42-B80	84
C21-11	78	C22-B25	74	C24-H20	75	C28S-HB06XL	77	C31-40	83	C51R-72	85
C21-11R	78	C22-B26	74	C24-H21	75	C28S-HB07XL	77	C31-73	83	C51R-80	85
C21-12	78	C22-B27	74	C24-H22	75	C28S-HB08XL	77	C31-76	83	C51R-91	85
C21-12R	78	C22-B28	74	C24-H24	75	C28S-HB10XL	77	C31-78	83	C51R-92	85
C21-12T	78	C22-B29	74	C24-H27	75	C28S-R05L	77	C31-91	83	C52-H06	85
C21-14N	78	C22-B30	74	C24-H30	75	C28S-R06L	77	C31-92	83	C52R-H08	85
C21-14NR	78	C22-B32	74	C24-H32	75	C28S-R08L	77	C32A-B11	83	C52R-H09	85
C21-20	78	C22-H08	74	C24-H33	75	C28S-R10L	77	C32A-B12	83	C52R-H10	85
C21-38MR	78	C22-H09	74	C24-RB09	75	C28S-R12L	77				
				C24-RH09	75						

INDEX

ARTICLE CODE	PAGE NUMBER	ARTICLE CODE	PAGE NUMBER	ARTICLE CODE	PAGE NUMBER	ARTICLE CODE	PAGE NUMBER	ARTICLE CODE	PAGE NUMBER		
C52R-H11	85	C64-H20	86	C72-H20	87	C82-H65	88	CB/180108	103	CB/253B	101
C52R-H12	85	C64-H21	86	C72-H21	87	C82-H70	88	CB/180316	103	CB/253TC	100
C52R-H13	85	C64-H22	86	C72-H22	87	C82-H75	88	CB/180332	103	CB/253TM	99
C52R-H14	85	C64-H23	86	C72-H23	87	C82-H80	88	CB/180532	103	CB/253X	101
C52R-H15	85	C64-H24	86	C72-H24	87	C84-H24	88	CB/180732	103	CB/254	101
C52R-H16	85	C64-H25	86	C72-H25	87	C84-H25	88	CB/180964	103	CB/262	101
C52R-H17	85	C64-H26	86	C72-H26	87	C84-H26	88	CB/1810	103	CB/3005G	109
C52R-H18	85	C64-H27	86	C72-H27	87	C84-H27	88	CB/1815	103	CB/3006G	109
C52R-H19	85	C64-H28	86	C72-H28	87	C84-H28	88	CB/1815TC	100	CB/3008G	109
C52R-RH10	85	C64-H30	86	C72-H30	87	C84-H30	88	CB/1820	103	CB/3010G	109
C61-72	87	C64-H32	86	C72-H32	87	C84-H32	88	CB/1820TC	100	CB/3012G	109
C61-74	87	C64-H36	86	C72-H33	87	C84-H33	88	CB/1825	103	CB/3105G	109
C61-80	87	C64-RH09	86	C72-H34	87	C84-H34	88	CB/1825TC	100	CB/3106G	109
C61-90KIT7	87	C64W-H17	172	C72-H35	87	C84-H35	88	CB/1830	103	CB/3108G	109
C61-91	87	C64W-H19	172	C72-H36	87	C84-H36	88	CB/1830TC	100	CB/3110G	109
C61-92	87	C64W-H21	172	C72-H38	87	C84-H38	88	CB/1840	103	CB/3112G	109
C62-E10	34	C64W-H22	172	C72-H41	87	C84-H41	88	CB/1840TC	100	CB/350	101
C62-H08	85	C64W-P03	172	C72-H46	87	C84-H46	88	CB/1850	103	CB/351	101
C62-H09	85	C66-E10	86	C72-H50	87	C84-H50	88	CB/1850TC	100	CB/351B	102
C62-H10	85	C66-E12	86	C72-H55	87	C84-H55	88	CB/1860	103	CB/351TC	100
C62-H11	85	C66-E14	86	C72-H60	87	C84-H60	88	CB/1860TC	100	CB/351TM	99
C62-H12	85	C66-E16	86	C74-H17	87	C84-H65	88	CB/1880	103	CB/351X	101
C62-H13	85	C66-E18	86	C74-H18	87	C84-H70	88	CB/190316	106	CB/352	101
C62-H14	85	C66-E20	86	C74-H19	87	C84-H75	88	CB/190332	106	CB/352B	102
C62-H15	85	C66-E22	86	C74-H20	87	C84-H80	88	CB/190532	106	CB/352BD	102
C62-H16	85	C66-E24	86	C74-H21	87	C99A-E115BMR	26	CB/1915	106	CB/352D	101
C62-H17	85	C66-R08	86	C74-H22	87	C99A-E96BMR	24	CB/1920	106	CB/352TC	100
C62-H18	85	C68-H05	86	C74-H23	87	C99-E114H2	25	CB/1925	106	CB/352TM	99
C62-H19	85	C68-H06	86	C74-H24	87	C99-E115H2	25	CB/1930	106	CB/352X	101
C62-H20	85	C68-H07	86	C74-H25	87	C99-E21	34	CB/1940	106	CB/353	101
C62-H21	85	C68-H08	86	C74-H26	87	C99-E68H2	24	CB/1950	106	CB/353B	102
C62-H22	85	C68-H10	86	C74-H27	87	C99-E77H2	26	CB/1960	106	CB/353TC	100
C62-H23	85	C68-H12	86	C74-H28	87	C99-E79H2	26	CB/1980	106	CB/353TM	99
C62-H24	85	C68-H14	86	C74-H30	87	C99-E95H2	25	CB/2004G	109	CB/353X	101
C62-H25	85	C68-H17	86	C74-H32	87	C99-E99H2	24	CB/2005G	109	CB/354	101
C62-H26	85	C68-H19	86	C74-H33	87	CB/1020G	109	CB/2006G	109	CB/491	104
C62-H27	85	C68-RH07	86	C74-H34	87	CB/1025G	109	CB/2007G	109	CB/491B	104
C62-H28	85	C68-RT07	86	C74-H35	87	CB/1027G	109	CB/2008G	109	CB/491TC	100
C62-H30	85	C68-RX07	87	C74-H36	87	CB/1030G	109	CB/2010G	109	CB/491TM	99
C62-H32	85	C68-T30	86	C74-H38	87	CB/1040G	109	CB/2012G	109	CB/491X	104
C62-H36	85	C68-T40	86	C74-H41	87	CB/1045G	109	CB/2022	104	CB/492	104
C62-RH09	85	C68-T45	86	C74-H46	87	CB/1050G	109	CB/2104G	109	CB/492B	104
C64-B32	86	C68-T50	86	C74-H50	87	CB/1055G	109	CB/2105G	109	CB/492BD	104
C64-B34	86	C68-T55	86	C81-75	88	CB/1101	104	CB/2106G	109	CB/492D	104
C64-B36	86	C68-T60	86	C81-77	88	CB/1102	104	CB/2107G	109	CB/492TC	100
C64-E10/2	34	C68-T70	86	C81-91	88	CB/1103	104	CB/2108G	109	CB/492TM	99
C64F-1719	172	C68-T80	86	C82-H24	88	CB/1120G	109	CB/2110G	109	CB/492X	104
C64F-1819	172	C68-X06	87	C82-H25	88	CB/1125G	109	CB/2112G	109	CB/493	104
C64F-2122	172	C68-X08	87	C82-H26	88	CB/1127G	109	CB/250	101	CB/493B	104
C64F-KIT1	172	C68-X10	87	C82-H27	88	CB/1130G	109	CB/251	101	CB/493TC	100
C64-H08	86	C68-X12	87	C82-H28	88	CB/1140G	109	CB/251B	101	CB/493TM	99
C64-H09	86	C68-X14	87	C82-H30	88	CB/1145G	109	CB/251TC	100	CB/493X	104
C64-H10	86	C68-X16	87	C82-H32	88	CB/1150G	109	CB/251TM	99	CB/516HX05	108
C64-H11	86	C68-X18	87	C82-H33	88	CB/1155G	109	CB/251X	101	CB/516HX06	108
C64-H12	86	C71-75	88	C82-H34	88	CB/1271	104	CB/252	101	CB/516HX07	108
C64-H13	86	C71-77	88	C82-H35	88	CB/1272	104	CB/252B	101	CB/516HX08	108
C64-H14	86	C71-80	88	C82-H36	88	CB/1273	104	CB/252BD	101	CB/516HX10	108
C64-H15	86	C71-91	88	C82-H38	88	CB/1502TM	99	CB/252D	101	CB/516HX12	108
C64-H16	86	C71-91R	88	C82-H41	88	CB/1512TM	99	CB/252DB	101	CB/516HX14	108
C64-H17	86	C71-92	88	C82-H46	88	CB/1521	104	CB/252TC	100	CB/516PH2	108
C64-H17MB	172	C72-H17	87	C82-H50	88	CB/1522	104	CB/252TM	99	CB/516PH3	108
C64-H18	86	C72-H18	87	C82-H55	88	CB/1523	104	CB/252X	101	CB/516PH4	108
C64-H19	86	C72-H19	87	C82-H60	88	CB/180104	103	CB/253	101	CB/516P22	108

INDEX

ARTICLE CODE	PAGE NUMBER	ARTICLE CODE	PAGE NUMBER	ARTICLE CODE	PAGE NUMBER	ARTICLE CODE	PAGE NUMBER	ARTICLE CODE	PAGE NUMBER	ARTICLE CODE	PAGE NUMBER
CB/516PZ3	108	CB/806T	102	CB/823	105	CB/8807	106	CB/TH20H4	108	D02E-RE1418	90
CB/516PZ4	108	CB/806TC	100	CB/824	105	CB/901	104	CB/TR20H4	108	D02E-RE1419	90
CB/516SL08	108	CB/806TM	99	CB/824TM	99	CB/902	104	CB/TR23H4	108	D02E-RE1421	90
CB/516SL10	108	CB/806X	102	CB/824X	105	CB/902TM	99	CB/TR30H4	108	D02E-RE1422	90
CB/516SL12	108	CB/807	102	CB/825	105	CB/903	104	CB/TX02H4	108	D02E-RE1424	90
CB/516TX20	108	CB/807IP	102	CB/825TM	99	CB/911	105	CB/TX03H4	108	D02E-RE1427	90
CB/516TX25	108	CB/807IPR	102	CB/825X	105	CB/912	105	CB/TX04H4	108	D02E-RE1430	90
CB/516TX30	108	CB/807T	102	CB/826	105	CB/912TM	99	CB/TY01H4	108	D02E-RE1432	90
CB/516TX40	108	CB/807TC	100	CB/826B	105	CB/913	105	CB/TY10H4	108	D02E-RH0912	90
CB/516TX45	108	CB/807TM	99	CB/826BD	105	CB/HX07H4	108	CB/TY20H4	108	D02E-RH0938	90
CB/516TX50	108	CB/807X	102	CB/826TM	99	CB/HX09H4	108	CB/TY30H4	108	D02E-RH1412	90
CB/516TX55	108	CB/808	102	CB/826X	105	CB/HX13H4	108	CB4/EST36	107	D02F2-0125	89
CB/591	104	CB/808B	102	CB/827	105	CB/HX15H4	108	CB4/ST25	107	D02F2-01R	89
CB/591B	105	CB/808BD	102	CB/827B	105	CB/HX20H4	108	CB4/ST51	107	D02F2-1105	89
CB/591TC	100	CB/808IP	102	CB/827BD	105	CB/HX25H4	108	CB4D/ST25	107	D02F2-1110	89
CB/591TM	99	CB/808IPR	102	CB/827TM	99	CB/HX30H4	108	CF-E105	21	D02F2-11R	89
CB/591X	104	CB/808T	102	CB/827X	105	CB/HX40H4	108	CF-E108	27	D02F2-2110	89
CB/592	104	CB/808TC	100	CB/828	105	CB/PH01H4	107	CM-B0	201	D02F2-2120	89
CB/592B	105	CB/808TM	99	CB/828TM	99	CB/PH02H4	107	D		D02F2-2130	89
CB/592BD	105	CB/808X	102	CB/829	105	CB/PH10H4	107	D02E-0910	90	D02F2-21R/1	89
CB/592D	104	CB/809	102	CB/829B	105	CB/PH20H4	107	D02E-1420	90	D02F2-21R/2	89
CB/592TC	100	CB/8094	105	CB/829BD	105	CB/PH2M5	109	D02E-1430	90	D03-2114	89
CB/592TM	99	CB/8095	105	CB/829TM	99	CB/PH30H4	107	D02E-0E0908	90	D03-2123	89
CB/592X	104	CB/8096	105	CB/829X	105	CB/PL02H4	108	D02E-0E0910	90	D03-2133	89
CB/593	104	CB/8097	105	CB/830	105	CB/PL05H4	108	D02E-0E0911	90	D03-21R	89
CB/593B	105	CB/8099	105	CB/830TM	99	CB/PL06H4	108	D02E-0E0912	90	D03F-3110	89
CB/593TC	100	CB/809B	102	CB/830X	105	CB/PZ2M5	109	D02E-0E0913	90	D03F-3155	89
CB/593TM	99	CB/809BD	102	CB/841	103	CB/SL10H4	107	D02E-0E0914	90	D03F-3175	89
CB/593X	104	CB/809IP	102	CB/842	103	CB/SL15H4	107	D02E-0E0915	90	D03F-31R	89
CB/610	102	CB/809IPR	102	CB/843	103	CB/SL20H4	107	D02E-0E0916	90	D06-21	90
CB/611	102	CB/809T	102	CB/854	103	CB/SL25H4	107	D02E-0E0917	90	D20HR-300	90
CB/611TC	100	CB/809TC	100	CB/855	103	CB/SL30H4	107	D02E-0E0918	90	D20HR-450	90
CB/612	102	CB/809TM	99	CB/856	103	CB/SL35H4	107	D02E-0E0919	90	D20-P2131	90
CB/612TC	100	CB/809X	102	CB/858	103	CB/SL40H4	107	D02E-0E1413	90	D20-P3141	90
CB/613	102	CB/810	102	CB/860	103	CB/SP04	103	D02E-0E1414	90	D32-14B012	89
CB/613TC	100	CB/810IP	102	CB/860300	103	CB/SP06	103	D02E-0E1415	90	D32-14B060	89
CB/619	105	CB/810IPR	102	CB/860301	103	CB/SP06H4	108	D02E-0E1416	90	E	
CB/620	105	CB/810T	102	CB/860302	103	CB/SP08	103	D02E-0E1417	90	E01-11-0140	114
CB/621	105	CB/810TM	99	CB/860303	103	CB/SP08H4	108	D02E-0E1418	90	E01-11-0160	114
CB/622	105	CB/811	102	CB/860304	103	CB/SP10	103	D02E-0E1419	90	E01-11-0180	114
CB/660P154	102	CB/811B	102	CB/860305	103	CB/ST111	112	D02E-0E1421	90	E01-11-0200	114
CB/660P255	102	CB/811BD	102	CB/860306	103	CB/ST112	112	D02E-0E1422	90	E01-41-0140	114
CB/660S6H6	102	CB/811IP	102	CB/860308	103	CB/ST113	112	D02E-0E1424	90	E01-41-0160	114
CB/660T2T3	102	CB/811IPR	102	CB/860310	103	CB/ST113T	112	D02E-0E1427	90	E01-41-0180	114
CB/660Z1H4	102	CB/811T	102	CB/860314	103	CB/ST114	112	D02E-0E1430	90	E01-41-0200	114
CB/660Z2H5	102	CB/811TC	100	CB/860510	103	CB/ST25	111	D02E-0E1432	90	E01-44-0160	114
CB/662TM	104	CB/811TM	99	CB/861	103	CB/ST25TM1	100	D02E-RE0908	90	E01-44-0180	114
CB/701	104	CB/811X	102	CB/861314	103	CB/ST25TM2	100	D02E-RE0910	90	E01-44-0200	114
CB/702	104	CB/812	102	CB/861351	103	CB/ST31	111	D02E-RE0911	90	E05-44-0160	117
CB/702TM	99	CB/812IP	102	CB/862	103	CB/ST31TC	100	D02E-RE0912	90	E05-44-0200	117
CB/703	104	CB/812IPR	102	CB/863	103	CB/ST32	112	D02E-RE0913	90	E06-11-0140	114
CB/711	105	CB/812T	102	CB/864	103	CB/ST56	112	D02E-RE0914	90	E06-11-0160	114
CB/712	105	CB/812TC	100	CB/865	103	CB/ST61	112	D02E-RE0915	90	E06-11-0180	114
CB/712TM	99	CB/812TM	99	CB/866	103	CB/SVB25	103	D02E-RE0916	90	E06-41-0140	114
CB/713	105	CB/812X	102	CB/867	103	CB/T25M5	109	D02E-RE0917	90	E06-41-0160	114
CB/801	102	CB/813	102	CB/868	103	CB/T30M5	109	D02E-RE0918	90	E06-41-0180	114
CB/802	102	CB/814	102	CB/869	103	CB/TH05H4	108	D02E-RE0919	90	E06-44-0140	114
CB/803	102	CB/8156	105	CB/871	103	CB/TH06H4	108	D02E-RE0922	90	E06-44-0160	114
CB/804	102	CB/8157	105	CB/872	103	CB/TH07H4	108	D02E-RE1413	90	E06-44-0180	114
CB/805	102	CB/8159	105	CB/873	103	CB/TH08H4	108	D02E-RE1414	90	E08-11-0160	114
CB/806	102	CB/820	105	CB/874	103	CB/TH09H4	108	D02E-RE1415	90	E08-11-0180	114
CB/806IP	102	CB/821	105	CB/875	103	CB/TH10H4	108	D02E-RE1416	90	E08-11-0200	114
CB/806IPR	102	CB/822	105	CB/8806	106	CB/TH15H4	108	D02E-RE1417	90	E08-41-0160	114

INDEX

ARTICLE CODE	PAGE NUMBER	ARTICLE CODE	PAGE NUMBER	ARTICLE CODE	PAGE NUMBER	ARTICLE CODE	PAGE NUMBER	ARTICLE CODE	PAGE NUMBER		
E08-41-0180	114	E36-54-0250	119	E67-44-0180	124	F10-040-025	91	F14D-003-150	95	F22-020-060	92
E08-41-0200	114	E36-54-0280	119	E67-44-0225	124	F10-040-075	91	F17-000-060	92	F22-025-080	92
E09/45-160	115	E36-54-0280D	119	E67-44-0310	124	F10-040-100	91	F17-001-025	92	F22-030-080	92
E09/90-160	115	E36-56-0225	119	E68-44-0140	124	F10-040-125	91	F17-001-080	92	F22-040-100	92
E09/SH-125	115	E36-56-0250	119	E68-44-0140/0	124	F10-040-150	91	F17-001-300	92	F22-050-100	92
E09-44-0140	115	E36-56-0280	119	E68-44-0180	124	F10-040-300	91	F17-002-025	92	F22-060-125	92
E09-44-0160	115	E36-56-0280D	119	E68-44-0225	124	F10-045-100	91	F17-002-100	92	F22-080-150	92
E15-11-0160	116	E37-54-0160	119	E68-44-0310	124	F10-055-025	91	F17-002-300	92	F22A-0108	92
E15-11-0200	116	E37-54-0180	119	E69-ES1	122	F10-055-100	91	F17-003-150	92	F22A-0116	92
E15-41-0160	116	E38-54-0200	119	E69-ES1/R	122	F10-055-125	91	F17-004-200	92	F22A-0316	92
E15-41-0200	116	E50-140-2	120	E69-ESHX1	123	F10-055-150	91	F17C-001-080	95	F22A-0332	92
E15-44-0160	116	E50-190-2	120	E69-ESSQ	123	F10-055-200	91	F17C-002-100	95	F22A-0532	92
E15-44-0200	116	E50-240-2	120	E69-ESSQ1	123	F10-055-300	91	F17C-003-150	95	F22A-0564	92
E15XL-340	116	E50-300-2	120	E69-EZRJ45	123	F10-060-150	91	F17D-001-080	95	F22A-0764	92
E16-11-0160	116	E50-E16	29	E69F-ES2	123	F10-065-025	91	F17D-002-025	95	F22A-0964	92
E16-11-0200	116	E50L-170-2	120	E69F-SL	123	F10-065-100	91	F17D-002-100	95	F23-020-100	92
E16-41-0160	116	E50L-230-2	120	E69-LSA	123	F10-065-125	91	F17D-003-150	95	F23-025-100	92
E16-41-0200	116	E50-R03	120	E69-MC4	122	F10-065-150	91	F18-005-060	92	F23-030-100	92
E16-44-0160	116	E51-190-2	120	E69-MC4/MT	122	F10-065-200	91	F18-006-060	92	F23-040-100	92
E16-44-0200	116	E51-240-2	120	E69-MC4/R	122	F10-065-300	91	F18-007-060	92	F23-050-100	92
E16XL-340	116	E52-240-2	120	E69MC4-W05	122	F10-080-150	91	F18-008-060	92	F23-060-125	92
E17-11-0160	116	E52S-240-2	120	E69-NT1	122	F10-080-175	91	F18-009-060	92	F23-080-150	92
E17-41-0160	116	E53-280-2	120	E69-NT1/R	122	F10-100-200	91	F18-010-080	92	F23A-0104	92
E18-11-0160	116	E54-200-2	120	E69-OB2	122	F10-100-250	91	F18-015-080	92	F23A-0308	92
E18-41-0160	116	E55-280-2	120	E69-OB2/R	122	F10-120-250	91	F18-015-300	92	F23A-0316	92
E25-11-0160	117	E55-470-2	120	E69Q-P04	123	F10C-045-100	95	F18-020-100	92	F23A-0516	92
E25-41-0160	117	E55-E07	28	E69-T046	123	F10C-055-100	95	F18-020-300	92	F23A-0532	92
E25-AS06	118	E55P-180-2	120	E69-T468	123	F10C-065-125	95	F18-025-100	92	F23A-0732	92
E25-ASP10	117	E55P-300-2	120	E69-YT1	122	F10C-080-150	95	F18-025-300	92	F24-001-080	93
E25-ASP16	117	E55T-390-2	120	E69-YT1/R	122	F10C-100-175	95	F18-027-115	92	F24-002-100	93
E25-AT1	117	E55T-500-2	120	E70-225-2	119	F10C-120-200	95	F18-030-115	92	F24-003-150	93
E25-BSA22	117	E56-J1	121	E75-081	129	F10D-030-075	95	F18-030-300	92	F25-002-080	93
E25-BSA22R	117	E56-J2	121	E80-230	124	F10D-040-100	95	F18-040-130	92	F25-003-080	93
E25-BSM20	117	E56-L1	121	E80-230R	124	F10D-055-125	95	F18-045-130	92	F25-004-100	93
E25-BSM20R	117	E56-L2	121	E80-280R	124	F10D-060-025	95	F19-010-080	92	F25-005-100	93
E25-C4D	118	E56-W1	121	E81-180	124	F10D-065-150	95	F19-015-080	92	F26/AD1	111
E25-CK28	118	E60-41-0160	121	E82-190	124	F10D-080-150	95	F19-020-100	92	F26/BDS	110
E25-CK28H	118	E60-41-0200	121	E99-41-02A	114	F10M-045-100	91	F19-025-100	92	F26/BR1	111
E25-CK28R	118	E60-44-0160	121	E99-41-03A	115	F10M-060-150	91	F19-027-115	92	F26/BR1F	111
E25-COS	118	E60-44-0200	121	E99-41-03B	115	F14-000-060	91	F19-030-115	92	F26/BR2	111
E25-MIC	118	E60-51-0170	121	E99-41-05PH	115	F14-000-080	91	F19-040-130	92	F26/BT	111
E25-MMAX	117	E60-51-0200	121	E99-41-05PZ	115	F14-001-025	91	F20-040-125	92	F26/BTL	111
E25-MULTI1	117	E60-54-0170	121	E99-41-E0103	36	F14-001-080	91	F20-050-125	92	F26/FBT	111
E26-11-0160	117	E60-54-0200	121	E99-41-W09PH	115	F14-001-100	91	F20-055-125	92	F26/LBT	111
E26-41-0160	117	E61-K1160	150	E99-41-W09PZ	115	F14-001-125	91	F20-060-125	92	F26/RDF90	110
E29-54-0250	118	E62-32	122	E99-44-E0404	36	F14-001-200	91	F20-070-125	92	F26/RDS	110
E30-51-0250	118	E62-32R	122	E99-CP04A	124	F14-001-300	91	F20-080-125	92	F26/RDS90	110
E30-54-0180	118	E62-52	122	E99-CP04A/2	124	F14-001-500	91	F20-090-125	92	F26/SBT	111
E30-54-0250	118	E62-52R	122	E99-E0502	36	F14-002-025	91	F20-100-125	92	F26/TBT	111
E30-54-0300	118	E64-44-0190	119	E99-E10	28	F14-002-100	91	F20-110-125	92	F26A/BT4	107
E30Q-54-0150	118	E64-54-0200	119	E99-E18	22	F14-002-125	91	F20-120-125	92	F28/BT	108
E30Q-54-0180	118	E65-44-0140	124	EF-E27	27	F14-002-150	91	F20-130-125	92	F28-P12	108
E30Q-54-0250	118	E65-44-0140/0	124	EF-E34	28	F14-002-200	91	F20-140-125	92	F37-06	62
E30Q-54-0300	118	E65-44-0180	124	EF-E72	28	F14-002-300	91	F20A-0102	92	F37-07	62
E30W-54-0180	118	E65-44-0225	124	EJ-E07	30	F14-002-500	91	F20A-0104	92	F37-08	62
E30W-54-0250	118	E65-44-0310	124	EL-E28	28	F14-003-150	91	F20A-0308	92	F37-09	62
E30W-54-0300	118	E66-44-0140	124	EL-E34	22	F14-004-200	91	F20A-0516	92	F37-10	62
E34-250	118	E66-44-0140/0	124	ENJ-E21	30	F14C-001-080	95	F20-B05	94	F37-15	62
E34-250R	118	E66-44-0180	124	F		F14C-002-100	95	F21-050-150	92	F37-20	62
E35-54-0160	119	E66-44-0225	124	F10-025-075	91	F14C-003-150	95	F21-060-150	92	F37-IP08	62
E35-54-0180	119	E66-44-0310	124	F10-030-075	91	F14D-001-080	95	F21-070-150	92	F37-IP09	62
E35-54-0200	119	E67-44-0140	124	F10-030-100	91	F14D-002-025	95	F21-080-150	92	F37-IP10	62
E36-54-0225	119	E67-44-0140/0	124	F10-035-100	91	F14D-002-100	95	F21-100-150	92	F37-IP15	62

INDEX

ARTICLE CODE	PAGE NUMBER	ARTICLE CODE	PAGE NUMBER	ARTICLE CODE	PAGE NUMBER	ARTICLE CODE	PAGE NUMBER	ARTICLE CODE	PAGE NUMBER		
F37-P06	62	G02S-002-100	127	G09-16	179	G99-18-W09PH	135	GC02-H140	132	GC28S-H08L	134
F99-201	93	G03-000-060	125	G09-NC2	129	G99-18-W09PZ	135	GC10-19PH2	134	GC28S-H10L	134
F99-201P	93	G03-001-080	125	G09-VT30	129	G99-18-W12PH	135	GC10-E52H2	29	GD02-1105	134
F99-202	93	G03-002-100	125	G09-VT35	129	G99-18-W12PZ	135	GC11-12	133	GD02-1125	134
F99-202P	93	G03-002-150	125	G09-VT40	129	G99-401	126	GC11-20	133	GD02-2110	134
F99-403	93	G03-003-150	125	G09-VTP1	129	G99-402	126	GC11-40	133	GE99-E08	29
F99-403P	93	G03S-001-080	127	G10-18-0160	130	G99-701	126	GC11-72	134	GF99-E52	29
F99-405	93	G03S-002-100	127	G10-18-0180	130	G99-701S	127	GC11-75	134	GJ36-150	134
F99-501	93	G04-010-100	125	G10-18-0200	130	G99-702	126	GC12-H06	133	GK10-030	132
F99-501L	93	G04-015-100	125	G10-48-0160	130	G99-702S	127	GC12-H07	133	GK10-040	132
F99-501P	93	G04-020-100	125	G10-48-0180	130	G99-901	126	GC12-H08	133	GK10-050	132
F99-501PL	93	G04-025-125	125	G10-48-0200	130	G99-BP04	135	GC12-H09	133	GK10-060	132
F99-502	93	G04-027-150	125	G12-18-0140	130	G99-BP06	135	GC12-H10	133	GK10-080	132
F99-601	94	G04-030-150	125	G12-18-0160	130	G99-E701	36	GC12-H11	133	GRT-M35	126
F99-601V	94	G04S-010-100	127	G12-18-0180	130	G99-P26	136	GC12-H12	133	GRT-M40	126
F99-602	94	G04S-015-100	127	G12-48-0140	130	GB09-05/2	132	GC12-H13	133	H	
F99-602V	94	G04S-020-100	127	G12-48-0160	130	GB09-06	132	GC12-H14	133	H01-12-040	139
F99-605	93	G04S-025-100	127	G12-48-0180	130	GB09-07	132	GC12-H15	133	H01-15-040	139
F99-606	94	G05-001-080	125	G14-18-0160	130	GB09-08	132	GC12-H16	133	H01-18-060	139
F99-701	94	G05-002-100	125	G14-18-0180	130	GB09-09	132	GC12-H17	133	H01-20-060	139
F99-702	94	G05-B02	126	G14-18-0200	130	GB09-10	132	GC12-H18	133	H01-20-100	139
F99-901	94	G05S-002-100	127	G15-18-0160	131	GB09-11	132	GC12-H19	133	H01-25-080	139
F99A-E80	27	G06-025-080	125	G15-18-0200	131	GB09-12	132	GC12-H20	133	H01-25-100	139
F99C-601	95	G06-030-080	125	G15-48-0160	131	GB09-13	132	GC12-H21	133	H01-30-080	139
F99C-602	95	G06-040-080	125	G15-48-0200	131	GB09-14	132	GC12-H22	133	H01-30-100	139
F99C-E601	35	G06-050-080	125	G16-18-0160	131	GB09-15	132	GC18S-H04	133	H01-30-150	139
F99D-601	95	G06-060-100	125	G16-18-0200	131	GB09-16	132	GC18S-H05	133	H01-35-080	139
F99D-602	95	G07-050-125	125	G16-48-0160	131	GB09-17	132	GC18S-H06	133	H01-40-080	139
F99-E0507	35	G07-055-125	125	G16-48-0200	131	GB09-18	132	GC18S-H08	133	H01-40-100	139
F99-E0705	35	G07-060-125	125	G17-18-0160	131	GB09-19	132	GC18S-T20	133	H01-40-150	139
F99-E0706	35	G07-070-125	125	G18-18-0160	131	GB09-22	132	GC18S-T25	133	H02-00-060	139
F99-E3901	35	G07-080-125	125	G20-18-0160	131	GB09-24	132	GC18S-T27	133	H02-0-060	139
F99-E3902	35	G07-090-125	125	G21-18-0160	131	GB09-R06	132	GC18S-T30	133	H02-1-080	139
F99-E701	35	G07-100-125	125	G21-48-0160	131	GB14-10	132	GC18S-T40	133	H03-0-060	139
F99-E79	28	G07-110-125	125	G25-18-0250	132	GB14-11	132	GC18S-T45	133	H03-1-080	139
F99-E81	27	G07-120-125	125	G26/BT	125	GB14-12	132	GC18S-X08	133	H04-04-040	139
F99-E95	21	G07-130-125	125	G30-18-0170	131	GB14-13	132	GC18S-X10	133	H04-05-040	139
F99-P41	94	G07-B05	126	G30-18-0200	131	GB14-14	132	GC20-19PH2	134	H04-06-040	139
FJR-E46	27	G08-05/1	128	G30-48-0160	131	GB14-17	132	GC21-12	134	H04-07-040	139
FLR-E36	27	G08-11/1	128	G30-48-0200	131	GB14-19	132	GC21-20	134	H04-08-040	139
FR-E79	21	G08-21/1	128	G40-48-0145	122	GB14-22	132	GC21-40	134	H04-09-060	139
FX-MD	98	G08B-PH1	128	G50-CSN	135	GB14-24	132	GC21-74	134	H04-10-060	139
G		G08B-PH2	128	G50-CSP	135	GB14-R06	132	GC21-77	134	H04-15-060	139
G01-025-075	125	G08B-PZ1	128	G50-SGP	135	GB21-250	132	GC22-H10	134	H04-20-060	139
G01-030-100	125	G08B-PZ2	128	G50-SHN	135	GB99-E20	29	GC22-H11	134	H05-02-040	139
G01-035-100	125	G08B-SL25	128	G50-SRN	135	GC00-17PH2	133	GC22-H12	134	H05-05-040	139
G01-040-100	125	G08B-SL30	128	G80-AAC1	137	GC01-12	132	GC22-H13	134	H06-15-040	139
G01-045-125	125	G08B-SL35	128	G80-AAC2	137	GC01-20	133	GC22-H14	134	H06-20-060	139
G01-055-125	125	G08B-SL40	128	G80-MDC2	137	GC01-71	133	GC22-H15	134	H06-25-080	139
G01-065-150	125	G08B-SL55	128	G85-AAC1	138	GC01-73	133	GC22-H16	134	H06-30-080	139
G01-080-175	125	G08B-SL65	128	G85-ADC1	138	GC01-75	133	GC22-H17	134	H06A-0050	139
G01S-025-100	127	G08B-SP22	128	G90-IR500	138	GC02-H040	132	GC22-H18	134	H06A-0116	139
G01S-030-100	127	G08B-TX10	128	G90-IR750	138	GC02-H045	132	GC22-H19	134	H06A-0332	139
G01S-035-100	127	G08B-TX15	128	G99-0431	136	GC02-H050	132	GC22-H20	134	H06A-0764	139
G01S-040-100	127	G08B-TX20	128	G99-0431A26	136	GC02-H055	132	GC22-H21	134	H20-125FL	140
G01S-055-125	127	G08B-TX25	128	G99-0431A27	136	GC02-H060	132	GC22-H22	134	H20-125SB	140
G01S-065-150	127	G08C-PC05	128	G99-0431A32	136	GC02-H070	132	GC22-H24	134	H20S-120FL	141
G02-000-060	125	G08C-SQ06	128	G99-0431A32H	136	GC02-H080	132	GC22-H27	134	H20S-120SB	141
G02-001-080	125	G08C-SQ08	128	G99-18-02A	130	GC02-H080	132	GC22-H27	134	H20T-125SB	140
G02-002-100	125	G08C-TR08	128	G99-18-03A	130	GC02-H090	132	GC22-H30	134	H20-W04	141
G02-002-150	125	G08QH	128	G99-18-05PH	130	GC02-H100	132	GC22-H32	134	H20-W06	141
G02-003-150	125	G08RC	128	G99-18-05PZ	130	GC02-H110	132	GC28S-H04L	134	H21-125SB	140
G02S-001-080	127	G09-11	179	G99-18-E0103	36	GC02-H120	132	GC28S-H05L	134	H23F-130	140
						GC02-H130	132	GC28S-H06L	134		

INDEX

ARTICLE CODE	PAGE NUMBER	ARTICLE CODE	PAGE NUMBER	ARTICLE CODE	PAGE NUMBER	ARTICLE CODE	PAGE NUMBER	ARTICLE CODE	PAGE NUMBER		
H235-130	140	H99-N80A32H	146	J22-215RR	150	J40-A3	152	J55-312H	155	J58-210H	156
H24-130	140	HLD-0564	66	J22A-200	150	J40-A4	152	J55F-206	155	J58-212	156
H25-155	140	I		J22A-200R	150	J40J-A100	153	J55F-206H	155	J58-212H	156
H26-130	140	I01-10	147	J23-190	150	J40J-MB075	153	J55F-208	155	J59-106	157
H27-130	140	I01-10/A	147	J30-300	151	J40J-WB100	153	J55F-208H	155	J59-106H	157
H30B-115FL	141	I01-15	147	J30-300PRO	151	J40J-WC100	153	J55F-210	155	J59-108	157
H30E-115FL	141	I01-15/A	147	J31-300	151	J40J-WF100	153	J55F-210H	155	J59-108H	157
H30S-110SB	143	I01-20	147	J32-300	151	J40J-WF100C	153	J55F-212	155	J59-110	157
H30T-110SB	143	I01-20/A	147	J35-18B	151	J40-P13	152	J55F-212H	155	J59-110H	157
H30-W06	143	I02-10	147	J35-24B	151	J40-PD1	152	J55W-206	155	J59-112	157
H30-W10	141	I02-15	147	J36-150	151	J40-PD2	152	J55W-206H	155	J59-112H	157
H31S-120SB	143	I02-20	147	J36-R	151	J40R-DH225	152	J56-106	156	J59-206	157
H33S-120	143	I06-12-2	147	J40-014	151	J40R-MB150	152	J56-106H	156	J59-206H	157
H34S-115	143	I06-18-2	147	J40-016	151	J40R-MB225	152	J56-108	156	J59-208	157
H35S-140	143	I06-36-2	147	J40-017	151	J40R-ME150	152	J56-108H	156	J59-208H	157
H40-00-SA	144	I12-40	147	J40-019	151	J40R-PV210F	152	J56-110	156	J59-210	157
H40-1-SA	144	I12-40R	147	J40-020	151	J40R-WL240	152	J56-110H	156	J59-210H	157
H40-2A-SA	144	I20-190	148	J40-021	151	J44-067	151	J56-112	156	J59-212	157
H40-3C-SA	144	I20-190R	148	J40-022	151	J45C	153	J56-112H	156	J59-212H	157
H40-5-SA	144	I21-42-2	148	J40-024	151	J45C/D	153	J56-206	156	J64-206	157
H40-7-SA	144	I21-42-2R	148	J40-025	151	J45C/T	153	J56-206H	156	J64-206H	157
H40-AA-SA	144	I21-63-2	148	J40-027	151	J45CM	153	J56-208	156	J64-208	157
H40-R04	144	I21-63-2R	148	J40-029	151	J45CP	153	J56-208H	156	J64-208H	157
H43-120-SA	144	I30-2	148	J40-030	151	J45CPM	153	J56-210	156	J64-210	157
H43-125B-SA	144	I30-2R	148	J40-032	151	J45-R	154	J56-210H	156	J64-210H	157
H43-140-SA	144	I32-2	148	J40-033	151	J45-RDM	154	J56-212	156	J64-212	157
H43G-150B-SA	144	I32-2R	148	J40-035	151	J46C	154	J56-212H	156	J64-212H	157
H43G-150-SA	144	I32-2R	148	J40-037	151	J46CPM	154	J56-306	156	J65-106	157
H44-160B-SA	144	I34	148	J40-038	151	J46-R	154	J56-306H	156	J65-106H	157
H44-160-SA	144	I34-2R	148	J40-040	151	J46-R/30	154	J56-308	156	J65-107	157
H44T-160-SA	144	I38-2	148	J40-041	151	J46SL	154	J56-308H	156	J65-107H	157
H45D-150B-SA	144	J		J40-043	151	J47C-S	154	J56-310	156	J65-108	157
H45D-150-SA	144	J01-250L	149	J40-044	151	J47DUO	153	J56-310H	156	J65-108H	157
H50-115FL	142	J01-250R	149	J40-046	151	J47-R	154	J56-312	156	J65-204	157
H50-115SB	142	J04-250L	149	J40-048	151	J47-RH	154	J56-312H	156	J65-205	157
H50T-115SB	142	J04-250R	149	J40-051	151	J47-RS	154	J57-106	156	J65-206	157
H50-W04	142	J04-250S	149	J40-052	151	J47-SPQ	153	J57-106H	156	J65-245	157
H50-W06	142	J04-300S	149	J40-054	151	J47TK	154	J57-108	156	J65D-207	157
H51-115SB	142	J04H-250L	149	J40-057	151	J47TK-S	153	J57-108H	156	J66-640	157
H52-125	142	J04H-250R	149	J40-060	151	J49M	154	J57-110	156	J66-848	157
H53F-130	142	J04-R03	149	J40-064	151	J49-R	154	J57-110H	156	J66-855	157
H53S-130	142	J06-200-2	149	J40-065	151	J55-106	155	J57-112	156	J67-108	158
H54S-130	142	J06-250-2	149	J40-067	151	J55-106H	155	J57-112H	156	J67-108H	158
H55	145	J06-300-2	149	J40-068	151	J55-108	155	J57-206	156	J67-110	158
H55-145	142	J10-450	151	J40-070	151	J55-108H	155	J57-206H	156	J67-110H	158
H55-SC010	145	J10-450R	151	J40-073	151	J55-110	155	J57-208	156	J68-108	158
H56-130	142	J10-600	151	J40-076	151	J55-110H	155	J57-208H	156	J68-108H	158
H57-125	142	J10-600R	151	J40-079	151	J55-112	155	J57-210	156	J68-110	158
H57-1516	145	J10-750	151	J40-083	151	J55-112H	155	J57-210H	156	J68-110H	158
H59AL	145	J10-750R	151	J40-086	151	J55-206	155	J57-212	156	J68-112	158
H60-3	145	J10-900	151	J40-089	151	J55-206H	155	J57-212H	156	J68-112H	158
H62-YC	145	J10-900R	151	J40-092	151	J55-208	155	J58-106	156	J70-108	158
H63	145	J16-180B	150	J40-095	151	J55-208H	155	J58-106H	156	J70-108H	158
H64	145	J16-180S	150	J40-098	151	J55-210	155	J58-108	156	J70-110	158
H65-10	145	J17-190	150	J40-102	151	J55-210H	155	J58-108H	156	J70-110H	158
H99-04-06	139	J17-190B	150	J40-105	151	J55-212	155	J58-110	156	J70-112	158
H99-06-06	139	J18-230	150	J40-111	151	J55-212H	155	J58-110H	156	J70-112H	158
H99-12-06	139	J18-250	150	J40-114	151	J55-306	155	J58-112	156	J71-03	158
H99-31-E0310	36	J19-220	150	J40-121	151	J55-306H	155	J58-112H	156	J71-04	158
H99-E06	36	J22-215C	150	J40-127	151	J55-308	155	J58-206	156	J71-05	158
H99-JK-04	140	J22-215CR	150	J40-140	151	J55-308H	155	J58-206H	156	J71-06	158
H99-JK-06	140	J22-215P	150	J40-152	151	J55-310	155	J58-208	156	J72-0851A	158
H99-N80	146	J22-215PR	150	J40-A1	152	J55-310H	155	J58-208H	156	J72-0851B	158
H99-N80A32	146	J22-215R	150	J40-A2	152	J55-312	155	J58-210	156	J72-0852B	158

INDEX

ARTICLE CODE	PAGE NUMBER	ARTICLE CODE	PAGE NUMBER	ARTICLE CODE	PAGE NUMBER	ARTICLE CODE	PAGE NUMBER	ARTICLE CODE	PAGE NUMBER		
J72-1051A	158	K12-030-150	62	L/12	56	L25-150-2	161	LT/12D	57	N12-12	165
J72-E0811	36	K12-040-150	62	L/13	56	L25-200-2	161	LT/13AF	58	N12-12HD	165
J75-B26	159	K20-06	56	L/14	56	L25-250-2	161	LT/7	57	N12-13	165
J75-C26	159	K20-07	56	L/16	56	L25-250G-2	161	LT/700	59	N12-1625	165
J75-F26	159	K20-08	56	L/17	56	L25-300-2	161	LT/700B	60	N12-25AT	165
J75-H26	159	K20-08L	56	L/19	56	L25-300G-2	161	LT/700IPR	60	N12-P1615	165
J75-HR26	159	K20-09	56	L/2	56	L27-125	161	LT/700L	59	N12-P1630	165
J75-K26	159	K20-10	56	L/2.5	56	L27-150	161	LT/700TL	60	N12-P1652	165
J75M-R05	159	K20-10L	56	L/22	56	L27-175	161	LT/740	60	N12-1P6KIT	165
J75-O26	159	K20-11	56	L/24	56	L28-125	161	LT/800	57	N13-10P03	166
J75-R06	159	K20-12	56	L/27	56	L28-150	161	LT/800AF	58	N13-PC14	166
J75-R12	159	K20-13	56	L/3	56	L29-3	161	LT/800CP	60	N14-016514	167
J75-R26	159	K20-13L	56	L/3.5	56	L29-4	161	LT/800D	57	N14-017612	167
J75-S26	159	K20-B06	56	L/32	56	L29-5	161	LT/9	56	N14-017614	167
J75-TS26	159	K99-10-06	61	L/4	56	L29AT	161	LT/900	57	N14-018616	167
J76-R06	159	K99-10A-E06	32	L/4.5	56	L29ATR	161	LT/900AF	59	N14-019515	167
J80-200	154	K99-10A-E15	32	L/5	56	L30-2	161	LT/900C	58	N14-01K09	167
J81-200	154	K99-10A-M10	61	L/6	56	L30-3	161	LT/900CP	60	N14-01S32	167
J82-150	154	K99-10A-ME	61	L/7	56	L30-4	161	LT/900D	57	N14-01S36	167
J82-200	154	K99-10-E06	32	L/8	56	L30-5	161	LT/900M	58	N14-027414	167
J83-200	154	K99-10-E15	32	L/9	56	L30-6	161	LT/9AF	58	N14-029215	167
JL-E53	29	K99-10-M08	61	L01-100	160	L31-10	161	LT/9CP	60	N14-031	167
JLR-E34	22	K99-10-ME	61	L01-1000	160	L31-2	161	LT/9D	56	N14-0315Q	167
JLR-E62	22	K99-10-ME	61	L01-1500	160	L31-3	161	LT12/800	57	N14-032	167
JP99-E06	36	K99-11-M08	61	L01-200	160	L31-4	161	LT12/900	58	N14-0325Q	167
K		K99-12-06	62	L01-2000	160	L31-5	161	LT13/700	59	N14-033	167
K10-020-100	61	K99-12-E06	32	L01-300	160	L31-6	161	LT13/700L	59	N14-041	167
K10-025-100	61	K99-12-E14	32	L01-500	160	L31-8	161	LT13/800AF	58	N14-042	167
K10-030-100	61	K99-12-M07	62	L01F-1000	160	L35-61	161	LT13/900AF	59	N14-0451	167
K10-040-150	61	K99-12-ME	62	L01F-300	160	L35-62	161	LT30/900CP	61	N14-0453	167
K10-050-150	61	K99-F1	62	L01F-500	160	L35A-11	162	LT7/800	57	N14-051	167
K10-060-200	61	K99-F2	62	L01-H1000	160	L35A-51	162	LT7/900	57	N14-051R	167
K10-070-200	61	K99-F2M	62	L01-H300	160	L40G	162	M		N14-052	167
K10-080-200	61	K99-F2M/2	62	L01-H500	160	L40P-03	162	M01-0810	197	N14-052R	167
K10-100-200	61	K99-F3	62	L02-08	160	L40P-04	162	M01-1310	197	N14-061S	168
K10A-0104	61	KNR-E37	22	L02-12	160	L40P-05	162	M01-1615	197	N14-06R	168
K10A-0108	61	L		L02-16	160	L40P-06	162	M01-2015	197	N14-071	168
K10A-0308	61	L/0028	56	L02-24	160	L40P-08	162	M01-2520	197	N14-072	168
K10A-0316	61	L/0028	58	L02-32	160	L40P-10	162	M01-3520	197	N14-07DSG1	168
K10A-0332	61	L/0035	56	L02F-12	160	L40P-12	162	M01-505	197	N14-07DSG2	168
K10A-0516	61	L/0035	58	L12-30-2	160	L40P-14	162	M05-1010	197	N14-081	168
K10A-0532	61	L/0050	58	L12-40-2	160	L40-P14	162	M05-1616	197	N14-10	168
K10A-0564	61	L/0102	58	L12-50-2	160	L40P-16	162	M105-0460	197	N14-12F10	168
K10A-0732	61	L/0104	58	L12C-35	160	L40P-18	162	M105-0680	197	N14-12P14	168
K10A-0764	61	L/0108	58	L12C-35R	160	L40P-20	162	M105-1011	197	N14-12R09	169
K10A-0964	61	L/0116	58	L12DB-35	160	L40P-22	162	M20-KIT1	197	N14-12S08	168
K10T-030	61	L/0304	58	L12DB-45	160	L40P-30	162	N		N14-12S10	168
K10T-040	61	L/0308	58	L12DB-50	160	L50-06-2	162	N11-02A	163	N14-12S12	168
K10T-050	61	L/0316	58	L12-R30-2	160	L50-08-2	162	N11-02A/4	163	N14-12VAG.B	168
K10T-060	61	L/0332	58	L12-R40-2	160	L50-10-2	162	N11-02A-2	163	N14-12X16	168
K11-020-100	61	L/0364	58	L12-R50-2	160	L50-12-2	162	N11-02B-2	163	N14-E11	37
K11-025-100	61	L/0508	58	L16-30	161	L50-14-2	162	N11-03	163	N15-K1BMW	169
K11-030-100	61	L/0516	58	L16-40	161	L50-16-2	162	N11-04	163	N15-K2BMW	169
K11-040-150	61	L/0532	58	L16-50	161	L50-18-2	162	N11-05	164	N15-K2REN	169
K11-050-150	61	L/0564	58	L17-40	161	L50-20-2	162	N11-06	164	N15-K2VAG.12	169
K11-060-200	61	L/0716	58	L18-1000	161	L50-22-2	162	N11-20	164	N15-K3VAG	169
K11-080-200	61	L/0732	58	L18-1500	161	L50-25-2	162	N12-01	164	N15-M1FRD	170
K11-100-200	61	L/0764	58	L18-750	161	L50-30-2	162	N12-01B	164	N15-M1REN	170
K12-009-100	62	L/0916	58	L18F-1000	161	L50-B4-2	162	N12-04AB	164	N15-T1BMW	169
K12-010-100	62	L/0964	58	L18F-1500	161	L99-E02	36	N12-05	164	N15-T1REN	170
K12-015-100	62	L/1.3	56	L18F-750	161	L99-E08	37	N12-05P	164	N15-T3UNI	169
K12-020-150	62	L/1.5	56	L20-0401	162	LPR-E17	30	N12-10	165	N16-07	170
K12-025-150	62	L/10	56	L20-0403	162	LR-E35	29	N12-10HEN	165	N16-1001	170
K12-027-150	62	L/11	56	L20-045W	162	LT/12	57	N12-10L	165	N16-1002	170

INDEX

ARTICLE CODE	PAGE NUMBER	ARTICLE CODE	PAGE NUMBER	ARTICLE CODE	PAGE NUMBER	ARTICLE CODE	PAGE NUMBER	ARTICLE CODE	PAGE NUMBER		
N16-1003	170	N23-19DH	176	N43-01T20	181	P47-02S	183	R09F-SK175	197	R32-P11	201
N16-1004	170	N23-38	176	N43-01T30	181	P47-050	183	R10-ALCOM1	190	R35CT	201
N16-1005	170	N23-39	176	N43-01T31	181	P47-075	183	R10-ALPEN1	190	R35DE	201
N16-1110	170	N23-42	176	N43-01T32	181	P47-100	183	R10-CLR1	187	R36-1	201
N16-1116	170	N23-E06	37	N43-E09	37	P54-20S	184	R10-COM1	189	R36-2	201
N17-052208	170	N23S-17	173	P		P54A-25S	184	R10F-SLIM01	188	R36-3	201
N17-052211	170	N23S-19	173	P01-0522	182	P55-52MW	184	R10F-SLIM02	188	R36-4	201
N17-052708	170	N23S-21	173	P01-0527	182	R		R10F-TRCH1	189	R36-B04	201
N17-05L14	171	N30-E04	30	P01-0827	182	R.L7R	195	R10FW-SLIM01	192	R37-25	201
N17-05L17	171	N30-E09	30	P03-0316	182	R.P5R	194	R10-MAX01	185	R40-4	201
N17-05L19	171	N30-E10	30	P03-0519	182	R.P6	194	R10-MAX02	185	R41-1	201
N17-E09	37	N30-E12	30	P03-0525	182	R.P7R	194	R10-MIDI	186	R99-E24	37
N18-1522S	171	N31-1105	176	P05-0316	182	R.P8R	195	R10-MIDI/UV	187	R99-E32	37
N18-1522SL	170	N31-12	176	P05-0516	182	R.P-BP	195	R10-MINI1	186	S	
N18-CC	171	N31-13	176	P05-0519	182	R01-E05	37	R10W-DCK1	191	S4000M/6ST1	97
N18-CCR	171	N31-13C	176	P05-0525	182	R01-STD	198	R10W-MAX01	191	S4000M/6ST2	97
N21-0101	171	N31-14	176	P05-1025	182	R02-280	198	R11-MINI	196	S4000M/7ST1	97
N21-0102	171	N31-APW2	176	P05A-0316	182	R03K-M03	198	R11-PEN	196	S4000M/7ST2	97
N21-0302	171	N33-01BMC2/MS	177	P05A-0519	182	R03K-M04	198	R11-PRO	196	S4000M-1-067	203
N21-04P12	171	N33-01BPF	177	P05-AD2	183	R03K-M05	198	R12-BAT1	193	S4000M-1-067P	203
N21-04P21	171	N33-01SPF	177	P05B-0519	182	R03K-M06	198	R12-CLR1	193	SC22H-1-184	202
N21-05	172	N33-02CW	177	P05B-1025	182	R03K-NRC	197	R12-FLS1	193	SCB-1-1008	203
N21-10	172	N33-02DE	177	P05S-0519	182	R03K-PT	198	R12-PRO1	193	SE11-1-040	203
N21-20BC	172	N33-02HE	177	P07-20	183	R03K-RTC	198	R14-CF10	190	SE11-24	115
N21-20BCW	172	N33-02PW	177	P07-30	183	R03K-RTC-NM04	198	R14-CF20	190	SE41-1-040	203
N21-30DST	172	N33-02PWC	177	P07-50	183	R03K-RTC-NM05	198	R14W-CF20	192	SE41-24	115
N23-011	173	N33-02TO	177	P07TT-10	183	R03K-RTC-NM06	198	R15-0500	199	SE44-1-040	203
N23-0200	174	N33-02UA	177	P07TT-20	183	R03K-RTC-NM08	198	R15-1000	199	SE44-24	115
N23-022427	174	N33-03DS	178	P07TT-DW	183	R03K-RTC-NM10	198	R15-1800	199	SF10-1-067	202
N23-022730	174	N33-03SL	178	P10-10	183	R03K-RTC-NM12	198	R15-3000	199	SF10-1-067P	202
N23-023032	174	N33-03SS	178	P10-20	183	R03K-RTC-SM05	198	R15-HTM	199	SF18-1-071	202
N23-032038	174	N33-04	178	P10-30	183	R03K-RTC-SM06	198	R15-NTM	199	SF99-601	94
N23-03K1AU	173	N33-04F	178	P15-015	183	R03K-RTC-SM08	198	R15-TM10	199	SF99-601V	94
N23-03K1BMW	173	N33-04R1	178	P15-030	183	R03K-S03	198	R16-700	199	SF99-602	94
N23-03K1VW	173	N33-04R2	178	P15-050	183	R03K-S04	198	R18R	199	SF99-602V	94
N23-03K2BMW	173	N33-05C	178	P15-100	183	R03K-S05	198	R18S	199	SF99-701	94
N23-03K2VW	173	N36-1002	178	P17-B03	183	R03K-S06	198	R20R	199	SF99-702	94
N23-0525	175	N36-CS0722	178	P20-060	184	R04K	197	R20RP	199	SG01-1-067	204
N23-0604	175	N36-E04	37	P20-080	184	R04K-AS	198	R20RS	199	SG01-1-067P	204
N23-0750	174	N36-WH2	178	P20-100	184	R04K-M04	198	R20S	199	SG18-1-040	204
N23-0810A	174	N36-WRT	178	P20-120	184	R04K-M05	198	R21P	199	SG18-24	130
N23-0811A	174	N37-02AJ1	179	P200-060	184	R04K-M06	198	R25-P05	200	SG99-701	126
N23-0811D	174	N37-02FR1	179	P21-012M	184	R04K-M08	198	R26A-B05	200	SG99-702	126
N23-0811L	174	N37-02S11	179	P21-030	184	R04K-M10	198	R26-M25	200	SH20-1-040	204
N23-0812G	174	N37-02SM1	179	P21-040	184	R04K-S04	198	R30-06	200	SH99-1-080	204
N23-0825	175	N37-02SM2	179	P21-040M	184	R04K-S05	198	R30-08	200	SJ72-1-60	204
N23-0831	175	N41-10	179	P21-050	184	R04K-S06	198	R30-10	200	SK10-1-54	202
N23-0832	175	N42-01K13	180	P21-050M	184	R04K-S08	198	R30-12	200	SP05-0316-180	205
N23-08MC	174	N42-01M10	180	P21-060	184	R04K-S10	198	R30-R04	200	SP05-0516-120	205
N23-08TD	175	N42-01T50	180	P21-060M	184	R05-1000	200	R32-08	201	SP05-0519-120	205
N23-08VCT	175	N43-01K1UNI	180	P21-070	184	R05-200	200	R32-10	201	SP05-0525-108	205
N23-10	175	N43-01K1VAG	180	P21-080	184	R05-300	200	R32-11	201	SP05-1025-072	205
N23-11	175	N43-01T01	181	P21-080M	184	R05-500	200	R32-12	201	SP21-54	205
N23-1218	175	N43-01T01S	181	P21-100	184	R08-500	200	R32-13	201	Z	
N23-1225	175	N43-01T02	181	P21-100M	184	R08-500SN	200	R32-14	201	Z/12	98
N23-1230	175	N43-01T02S	181	P21-120	184	R08-FSN	200	R32-15	201	Z/40	98
N23-1240	175	N43-01T04	181	P21-120M	184	R08-FSY	200	R32-16	201	Z/55	98
N23-1246	175	N43-01T04S	181	P21-150	184	R09F-100	197	R32-17	201		
N23-1418	176	N43-01T10	181	P24M-022	184	R09F-125	197	R32-18	201		
N23-1424	176	N43-01T11	181	P26-BE1	184	R09F-150	197	R32-19	201		
N23-15C	175	N43-01T12	181	P26-BH1	184	R09F-175	197	R32-21	201		
N23-15P	175	N43-01T13	181	P26-SH1	184	R09F-100	197	R32-22	201		
N23-1850	176	N43-01T14	181	P45A	183	R09F-SK100	197	R32-24	201		
N23-1855	176	N43-01T15	181	P45D	183	R09F-SK125	197	R32-27	201		
						R09F-SK150	197				

The Ceta Form Guarantee

Ceta Form offers a total quality guarantee for its tools against defects in material or workmanship. This guarantee covers the free repair or replacement of the faulty tool.

This guarantee is not valid for tools which have been misused or abused. A tool's normal wear and tear in the expected reasonable lifetime is also exempt from guarantee.


Exceptions of the Ceta Form Guarantee

Tool cabinets, tool cases, torque wrenches, tape measures, utility knives, lighting equipment, cutting tools and wire brushes are covered by a 2 year warranty against failures due to production defects.

Consumable items such as bits, hole saws, files, utility knife blades, hacksaw blades, jigsaw blades, plastic hammer heads and hand riveter spares are covered by a limited warranty only. This warranty is valid if the product is unusable when it is in new condition due to a possible production defect.

Examples of Improper Use

Compliance to the below mentioned instructions and avoiding misuse will ensure that your tools will serve you without any problems for years. This will also keep our warranties valid. In the event that our tools fail due to the one of the below shown types of misuses, the warranty will be invalid.



Never use extensions on tools unless it is specified that it is appropriate.



Ring ends of ratcheting combination wrenches should be used for rapid tightening. It is recommended that you use the open end for high torque final tightening.



Torque wrenches signal with a "click" sound when the preset torque is reached. Further application of power after this signal may destroy the ratchet or the spring mechanism.



Never use chromed sockets on impact wrenches. Use only impact sockets which are black coloured on impact wrenches.



Do not use your screwdriver as a lever or a chisel. Avoid exerting excess torque through using the hanging hole as a lever.



Always select the right type of screwdriver or screwdriver bit for the type of screw you are using. Too small or too big a screwdriver/bit compared to the screw may destroy the tool or the screw. Also be careful about the distinction between Phillips and Pozidrive screws.



Do not use pliers and cutters for cutting materials larger than the permissible capacities. Avoid short circuiting when working on live circuits as this may destroy the cutting edges.



Do not use cable shears to cut materials other than copper. Always conform to the cutting capacities when working on copper wires.



Do not use hammers on a material whose hardness is higher than the hammer head (50-58 Hrc).




Tape measures should be used as a precision instrument. When being used in construction environment involving building chemicals etc., ensure that the tape is clear when rewinding. Keep away from water and moisture as this might rust the blade.



Do not use tools other than hammers for striking purpose.



Do not alter the sizes and dimensions of your tools.




Please conform to the capacities listed throughout the product tables.



The torque power of ballpoint hex tools is lower compared to normal hex tools. Please use them accordingly.

CETA FORM



CETA FORM EL ALETLERİ SANAYİ VE TİCARET A.Ş.

Mermerciler Sanayi Sitesi 3.Cadde No: 3
34520 Beylikdüzü / İstanbul
Phone : +90 212 876 46 41 (pbx)
Fax : +90 212 876 46 40
E-mail : export@cetaform.com



CETA FORM Limited

Windsor House, Cornwall Road, Harrogate
North Yorkshire HG1 2PW United Kingdom
Phone : +44 (0)845 308 1440
E-mail : sales@cetaform.co.uk
www.cetaform.co.uk



Quality is expressed through documentation, not words